
NAVAER 1000C

Proj No 5310-0856

FSC 5310

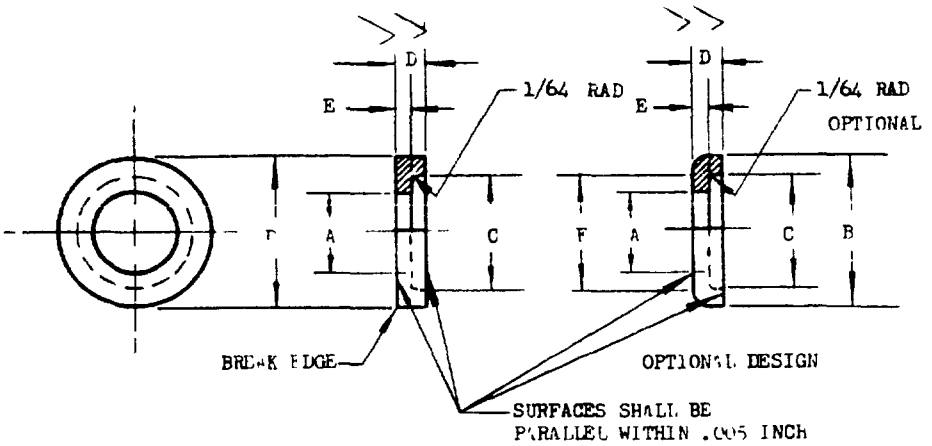

AN PART NO	SCREW SIZE	A	B	C	D	E	F MIN DIA
AN975-3	NO. 10	13/64	15/32	11/32	3/16	1/16	3/8
AN975-4	1/4	17/64	9/16	13/32	13/64	5/64	7/16
AN975-5	5/16	21/64	11/16	17/32	13/64	5/64	1/2
AN975-6	3/8	25/64	25/32	19/32	13/64	5/64	9/16
AN975-7	7/16	29/64	27/32	21/32	13/64	5/64	5/8
AN975-8	1/2	33/64	15/16	23/32	7/32	3/32	3/4
AN975-9	9/16	37/64	1- 3/32	25/32	7/32	3/32	7/8
AN975-12	3/4	49/64	1- 9/32	1	15/64	7/64	1-1/8
AN975-14	7/8	57/64	1-15/32	1- 3/16	15/64	7/64	1-5/16

③ MATERIAL: STEEL, SPECIFICATION MIL-S-7097, AN-S-11, OR QQ-S-698.

③ FINISH. STEEL-CADMIUM PLATE IN ACCORDANCE WITH QQ-P-416, TYPE II, CLASS 2. PARTS WITH CLASS 3 PLATING MAY BE FURNISHED FROM SUPPLIER'S STOCK UNTIL 1 JANUARY 1975.

"√" INDICATES SMOOTH MACHINE FINISH.

REMOVE ALL BURRS AND SHARP EDGES.

DIMENSIONS IN INCHES. UNLESS OTHERWISE SPECIFIED, TOLERANCES · FRACTIONS ±1/64.

USED WITH TAPER PINS SHOWN ON AN386.

APPROVED 6 Dec 43 REVISED (1)31 Dec 52 (2) 10 Jun 66 (3) 29 DEC 72

PROCUREMENT SPECIFICATION	AIR FORCE–NAVY AERONAUTICAL STANDARD	AN975
NONE	WASHER - TAPER PIN	

SUPERSEDES USAF DRAWING 975

☆ U. S. GOVERNMENT PRINTING OFFICE: 1973-714-543/3662

NOTICE—When Government drawings, specifications, or other data are used for any purpose other than in connection with a definitely related Government procurement operation, the United States Government thereby incurs no responsibility, nor any obligation whatsoever; and the fact that the Government may have formulated, furnished, or in any way supplied the said drawings, specifications, or other data is not to be regarded by implication or otherwise as in any manner licensing the holder or any other person or corporation, or conveying any rights or permission to manufacture, use or sell any patented invention that may in any way be related thereto.

NOTE—This drawing was approved by joint action of the Air Force and Navy Departments as the Air Force-Navy standard for this product. This drawing supersedes all antecedent standard drawings for the same product and shall become effective for the procurement of aeronautical supplies or for use in new designs, not later than six months after the latest date of approval shown.

NOTES TO PRINTER

REDUCE BORDER FROM ORIGINAL 8½ x 13 TO 8⅛ x 9¾ PRINT LEFT BORDER LINE ONE INCH FROM LEFT EDGE OF 8 x 10½ SHEET PRINT BOTTOM BORDER LINE ¾ INCH FROM BOTTOM EDGE OF 8 x 10½ SHEET. SIGNATURE

DRAWN BY A/1C T A DIFEDE Date

TYPED BY MLSpade

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T14:18Z
Check the source to verify that this is the current version before use.