Proj. No. 5310-0853

FED SUP CLASS
5310

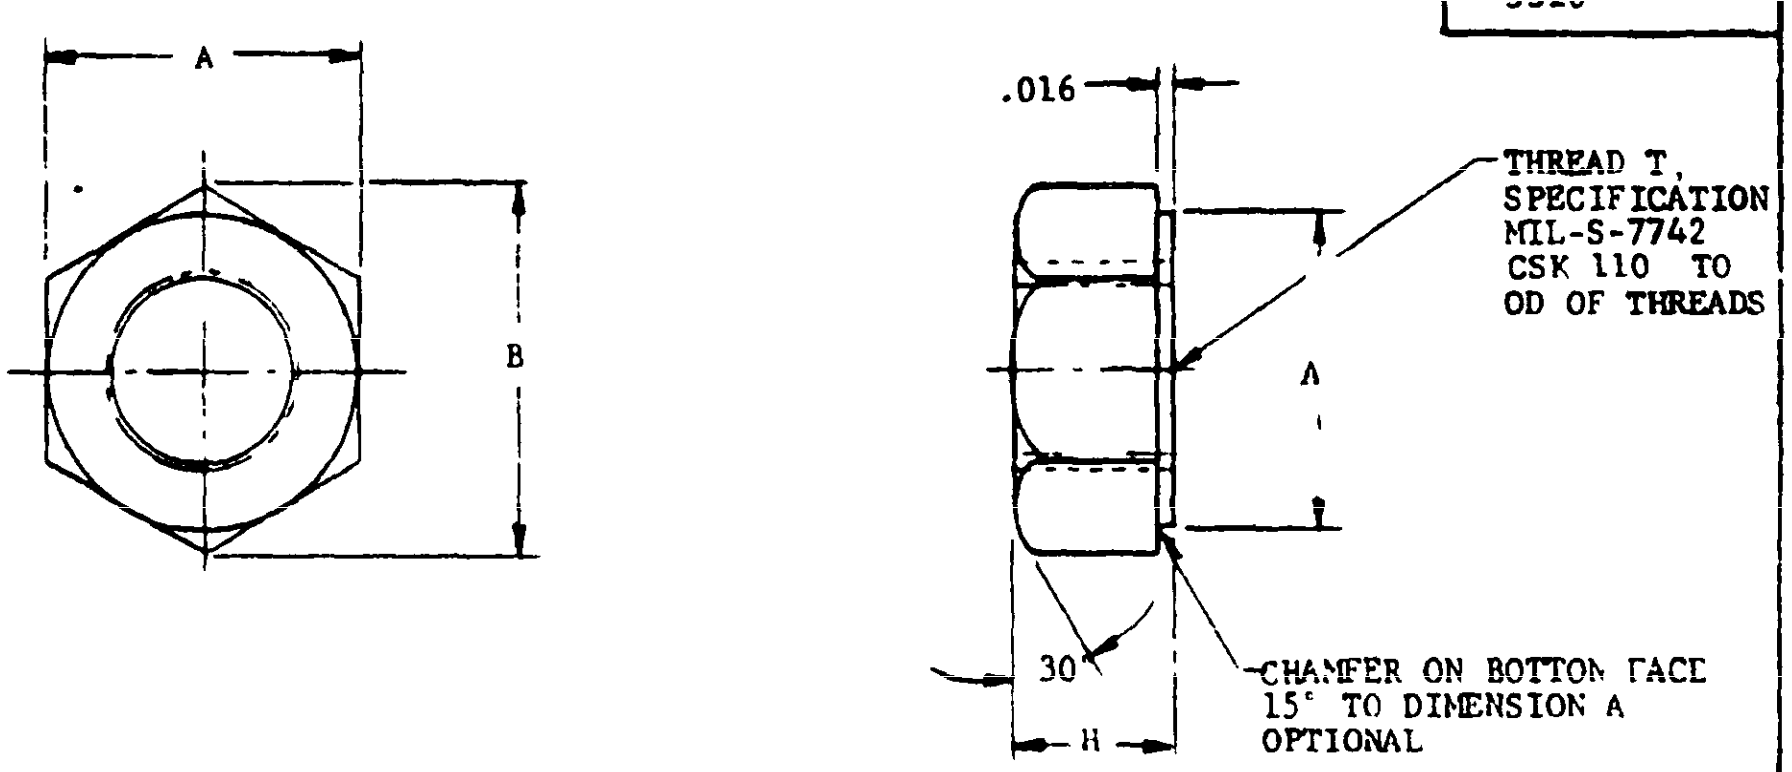
A
B
.016
THREAD T, SPECIFICATION MIL-S-7742 CSK 110 TO OD OF THREADS
A
30°
H
CHAMFER ON BOTTOM FACE 15° TO DIMENSION A OPTIONAL

AN PART NO.	THREAD T	ULTIMATE TENSILE STRENGTH MINIMUM POUNDS		(a) A	B APPROX	H
		STEEL	AL ALLOY			
AN315-640	NO. 6-40UNF-3B	-	-	$.313^{+.002}_{-.010}$	23/64	7/64
AN315-3	NO.10-32UNF-3B	2 210	1 100	$.375^{+.002}_{-.010}$	7/16	9/64
AN315-4	1/4 -28UNF-3B	4 080	2 030	$438^{+.002}_{-.010}$	1/2	3/16
AN315-5	5/16 -24UNF-3B	6 500	3 220	$.500^{+.002}_{-.010}$	37/64	15/64
AN315-6	3/8 -24UNF-3B	10 100	5 020	$.563^{+.002}_{-.010}$	21/32	9/32
AN315-7	7/16 -20 UNF-3B	13 600	6 750	$.625^{+.002}_{-.011}$	23/32	21/64
AN315-8	1/2 -20UNF-3B	18 500	9 180	$750^{+.002}_{-.012}$	7/8	3/8
AN315-9	9/16 -18UNF-3B	23 600	11 700	$.875^{+.002}_{-.012}$	1- 1/64	27/64
AN315-10	5/8 -18UNF-3B	30 100	14 900	$1\ 000^{+.002}_{-.014}$	1- 5/32	15/32
AN315-12	3/4 -16UNF-3B	44 000	21 800	$1\ 125^{+.002}_{-.016}$	1-19/64	5/8
AN315-14	7/8 -14UNF-3B	60 000	29 800	$1\ 313^{+.002}_{-.017}$	1-33/64	21/32
AN315-15	1 -12UNF-3B	80 700	40 000	$1\ 500^{+.002}_{-.019}$	1-47/64	3/4
(b) ~~AN315-16~~	~~1 -14NF-3~~	~~80 700~~	~~40 000~~	~~$1.500^{+.002}_{-.019}$~~	~~1-47/64~~	~~3/4~~
AN315-18	1-1/8-12UNF-3B	101 800	50 500	$1\ 688^{+.002}_{-.021}$	1-61/64	13/16
AN315-20	1-1/4-12UNF-3B	130 200	64 400	$1\ 875^{+.002}_{-.023}$	2-11/64	7/8

(a) FOR ALUMINUM-ALLOY NUTS LARGER THAN -5 SIZE, TOLERANCES ON DIMENSION "A" MAY CONFORM TO APPLICABLE MATERIAL SPECIFICATIONS FOR BAR AND ROD.
(b) 1-14NF THREAD SIZE INACTIVE FOR DESIGN AFTER 27 MARCH 1967

MATERIAL STEEL, ALUMINUM ALLOY, AND CORROSION-RESISTANT STEEL SEE PROCUREMENT SPECIFICATION
⑩ FINISH STEEL-CADMIUM PLATE IN ACCORDANCE WITH QQ-P-416, TYPE II, CLASS 2 PARTS WITH CLASS 3 PLATING MAY BE FURNISHED FROM SUPPLIER'S STOCK UNTIL 1 JANUARY 1975.

ALUMINUM ALLOY-ANODIZE IN ACCORDANCE WITH MIL-A-8625, TYPE II.
CORROSION RESISTANT STEEL-PASSIVATE IN ACCORDANCE WITH QQ-P-35.

ADD C BEFORE DASH NUMBER FOR CORROSION-RESISTANT STEEL NUTS.
ADD D BEFORE DASH NUMBER FOR ALUMINUM-ALLOY NUTS.
ADD R AFTER DASH NUMBER FOR RIGHT-HAND THREAD.
ADD L AFTER DASH NUMBER FOR LEFT-HAND THREAD.

EXAMPLES OF PART NO. AN315-7L=STEEL NUT, 7/16-20UNF-3B, LEFT HAND THREAD
AN315D7R=ALUMINUM-ALLOY NUT, 7/16-20UNF-3B, RIGHT HAND THREAD.
AN315C7R=CORROSION-RESISTANT STEEL NUT, 7/16-20UNF-3B, RIGHT-HAND THREAD

DIMENSIONS IN INCHES. UNLESS OTHERSIES SPECIFIED, TOLERANCES: FRACTIONS ±1/64, DECIMALS ± 010,
ANGLES ±1°

FOR DESIGN FEATURE PURPOSES, THIS STANDARD TAKES PRECEDENCE OVER PROCUREMENT DOCUMENTS REFERENCED HEREIN.
REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATIONS FOR BID

APPROVED 8 JUL 43 REVISED ⑩ 29 DEC 72

NOTICE When Government drawings, specifications, or other data are used for any purpose other than in connection with a definitely related Government procurement operation, the United States Government thereby incurs no responsibility nor any obligation whatsoever; and the fact that the Government may have formulated, furnished, or in any way supplied the said drawings, specifications, or other data is not to be regarded by implication or otherwise as in any manner licensing the holder or any other person or corporation, or conveying any rights or permission to manufacture, use, or sell any patented invention that may in any way be related thereto.

NOTE This drawing was approved by joint action of the Air Force and Navy Departments as the Air Force-Navy standard for this product. This drawing supersedes all antecedent standard drawings for the same product and shall become effective for the procurement of aeronautical supplies or for use in new design not later than 6 months after the latest date of approval shown.

PROCUREMENT
SPECIFICATION
FF-N-836

AIR FORCE-NAVY AERONAUTICAL STANDARD

NUT, PLAIN, HEXAGON, AIRFRAME

AN315

SUPERSEDES FORMER USAF AND NAVY STANDARD ISSUES OF AN315

SHEET 1 OF 1

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL	OMB Approval No. 22-R255

INSTRUCTIONS: The purpose of this form is to solicit beneficial comments which will help achieve procurement of suitable products at reasonable cost and minimum delay, or will otherwise enhance use of the document. DoD contractors, government activities, or manufacturers/vendors who are prospective suppliers of the product are invited to submit comments to the government. Fold on lines on reverse side, staple in corner, and send to preparing activity. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements. Attach any pertinent data which may be of use in improving this document. If there are additional papers, attach to form and place both in an envelope addressed to preparing activity.

DOCUMENT IDENTIFIER AND TITLE AN315(10) NUT, PLAIN, HEXAGON, AIRFRAME

NAME OF ORGANIZATION AND ADDRESS	CONTRACT NUMBER
	MATERIAL PROCURED UNDER A ☐ DIRECT GOVERNMENT CONTRACT ☐ SUBCONTRACT

1. HAS ANY PART OF THE DOCUMENT CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE?
   A. GIVE PARAGRAPH NUMBER AND WORDING.

   B. RECOMMENDATIONS FOR CORRECTING THE DEFICIENCIES

2. COMMENTS ON ANY DOCUMENT REQUIREMENT CONSIDERED TOO RIGID

3. IS THE DOCUMENT RESTRICTIVE?

   ☐ YES ☐ NO (If "Yes", in what way?)

4 REMARKS

SUBMITTED BY (Printed or typed name and address - Optional)	TELEPHONE NO
	DATE

DD FORM 1 JAN 72 1426 REPLACES EDITION OF 1 JAN 66 WHICH MAY BE USED

FOLD

DEPARTMENT OF THE NAVY
Naval Air Engineering Center
Philadelphia, PA 19112

OFFICIAL BUSINESS

POSTAGE AND FEES PAID
DEPARTMENT OF THE NAVY
DOD 316

U.S.MAIL

Engineering Specifications and Standards Department (Code X)
Naval Air Engineering Center
Philadelphia, PA 19112

FOLD