

ARMY – AT, CR, ME
ARMY – AR, GL, MI
AIR FORCE – 82
DLA – 18


FED. SUP CLASS 5315

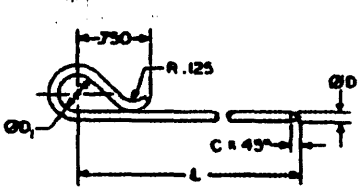

DASH NUMBER -1 (X)



DASH NUMBER -2




DASH NUMBER -3 THRU -7

TABLE I. DASH NUMBERS AND DIMENSIONS

CRES DASH NUMBER	ØD MIN	L LENGTH	ØD1 SIZE	H HEIGHT	P PITCH	A ANGLE ±5°	C x 45° CHAMFER, MIN	CLEVIS PIN DIA REF
1-(X)	.080 +.000 -.002	1/	.375	-	-	-	.020	
2	.080 +.000 -.002	1.938	.375	.188	.750	-	.020	.375
3	.0295 ±.001	.994	.094	.047	.188	35°	.014	.145
4	.0585 ±.001	1.125	.250	.094	.375	35°	.020	.250
5	.0765 ±.001	1.438	.313	.094	.500	35°	.020	.312
6	.0915 ±.002	1.875	.688	.125	.656	35°	.020	.375
7	.1480 ±.002	2.688	.781	.125	.875	35°	.020	.625

1/ SEE REQUIREMENT 3

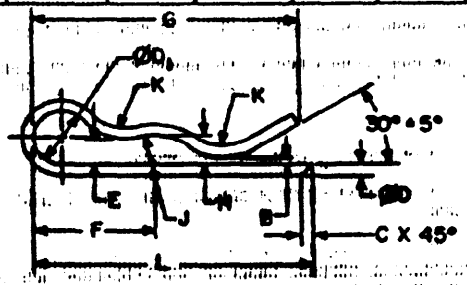

DASH NUMBER -8 THRU -29

TABLE II. DASH NUMBERS AND DIMENSIONS

CARBON STEEL DASH NO ZINC PLATED	CARBON STEEL DASH NO CADMIUM PLATED	ØD	H	G	J (MAD)	H	F	ØD1	E	K (RAD)	L	C x 45° CHAMFER, MIN	CLEVIS PIN DIA (REF)
8	19	.062 ±.001	.03	.81	.12	.08	.48	.18	.03	.16	.88	.014	.25
9	20	.062 ±.001	.03	.81	.09	.08	.48	.18	.03	.16	.88	.014	.19
10	21	.093 ±.002	.03	.94	.16	.09	.56	.22	.05	.19	1.03	.014	.31
11	22	.093 ±.002	.09	.94	.22	.16	.88	.22	.11	.19	1.03	.014	.44
12	23	.093 ±.002	.06	1.50	.12	.16	.62	.32	.08	.25	1.66	.020	.25
13	24	.185 ±.002	.06	1.31	.25	.16	.73	.32	.11	.25	1.41	.020	.38
14	25	.185 ±.002	.09	1.50	.31	.22	.73	.32	.16	.16	1.59	.020	.62
15	26	.125 ±.002	.03	1.62	.38	.22	.88	.38	.12	.19	1.75	.020	.75
16	27	.125 ±.002	.03	2.62	.50	.31	1.25	.62	.25	.38	2.75	.020	1.00
17	28	.125 ±.002	.06	3.00	.62	.34	1.38	.62	.28	.50	3.12	.020	1.25
18	29	.146 ±.002	.03	2.75	.25	.16	1.38	.62	.31	.25	3.06	.020	.50

③ ENTIRE STANDARD REVISED

APPROVED 29 SEP 48 REVISED ① 21 JAN 64 ② 16 SEP 75 ③ 30 APR 90

P.A. NAVY – AS Other Cust ARMY – AV AIR FORCE – 99	AERONAUTICAL STANDARD PIN, LOCK (HITCH PIN)	AN415
PROCUREMENT SPECIFICATION NONE	SUPERSEDING: PARTS OF AIR FORCE AND NAVY STANDARD ISSUES OF AN405	SHEET 1 OF 2

DLSC Form 1299
APR 76

Source: https://assist.dla.mil — Downloaded: 2020-10-20T14:15Z
Check the source to verify that this is the current version before use.

5315-0432

USER ACTIVITIES:
ARMY – AT, CR, ME

REVIEWER ACTIVITIES:
ARMY – AR, GL, MI
AIR FORCE – 82
DLA – IS

REQUIREMENTS:

1. MATERIAL. CORROSION RESISTANT STEEL, TYPE 316 (UNS S31600), CONDITION B IN ACCORDANCE WITH AMS 5648 OR AMS 5690 (DASH NUMBERS -1 THRU -7, TABLE I ONLY).

   CARBON STEEL WIRE, TYPE I, CLASS 1 OR 2 IN ACCORDANCE WITH QQ-W-428 (DASH NUMBERS -8 THRU -29, TABLE II ONLY).

2. PROTECTIVE COATING.

   (a) WHEN SPECIFIED, CARBON STEEL PINS SHALL BE CADMIUM PLATED IN ACCORDANCE WITH QQ-P-416, TYPE II, CLASS 2.
   (b) WHEN SPECIFIED, CARBON STEEL PINS SHALL BE ZINC COATED, TYPE II, FE/Zn13 IN ACCORDANCE WITH ASTM B633.

   (c) CRES PINS SHALL BE PASSIVATED IN ACCORDANCE WITH QQ-P-35.

3. PART NUMBER. THE PART NUMBER SHALL CONSIST OF THE BASIC AN NUMBER AND A DASH NUMBER FROM TABLE I OR TABLE II.

   EXAMPLE: AN415-2
   - DASH NUMBER FROM TABLE I
   - BASIC AN NUMBER

   EXAMPLE: AN415-17
   - DASH NUMBER FROM TABLE II
   - BASIC AN NUMBER

   AN415-1-(X) ONLY: SECOND DASH NUMBER INDICATES LENGTH L EXPRESSED IN INCREMENTS OF ONE (1) INCH.

   EXAMPLE: AN415-1-7 IS THE PART NUMBER FOR A TYPE AN415-1 PIN WITH LENGTH (L) OF SEVEN (7) INCHES. LENGTH (L) AVAILABLE IN 1, 2, 3, 4, 5, 7, 8, 10, 12, 13, 16, 19, 20, 25 OR 26 INCHES.

NOTES:

1. ALL DIMENSIONS ARE IN INCHES. TOLERANCE IS ±.016, UNLESS OTHERWISE SPECIFIED.
2. IN THE EVENT OF A CONFLICT BETWEEN THE TEXT OF THIS STANDARD AND THE REFERENCES CITED HEREIN, THE TEXT OF THIS STANDARD SHALL TAKE PRECEDENCE.
3. UNLESS OTHERWISE SPECIFIED, THE ISSUES OF REFERENCED GOVERNMENT (OR NON-GOVERNMENT) DOCUMENTS ARE THOSE LISTED IN THE ISSUE OF THE DEPARTMENT OF DEFENSE INDEX OF SPECIFICATIONS AND STANDARDS (DODISS) AND SUPPLEMENT THERETO, CITED IN THE SOLICITATION.
4. CHAMFER AS SHOWN AND REMOVE BURRS AND SHARP EDGES.

AMSC N/A FSC 5315 DISTRIBUTION STATEMENT A. APPROVED FOR PUBLIC RELEASE; DISTRIBUTION IS UNLIMITED. 29 SEP 89 (1) REVISED 18 SEP 75 (2) 30 APR 80 (3)

P.A. NAVY – AS Other Cust ARMY – AV AIR FORCE – 99	AERONAUTICAL STANDARD PIN, LOCK (HITCH PIN)	AN415
PROCUREMENT SPECIFICATION NONE	SUPERSEDES: FORMER AIR FORCE AND NAVY STANDARD ISSUES OF AN405	SHEET 2 OF 2

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T14:15Z
Check the source to verify that this is the current version before use.