REVIEW ACTIVITIES:
-82
ARMY-MI
DLA-IS
MARINE CORP-MC

NOTICE: When drawings, specifications or other data are used for any purpose other than in connection with a definitely related Government procurement operation, the United States Government thereby incurs no responsibility, nor any obligation whatsoever; and the fact that the Government may have formulated, furnished, or in any way supplied the said drawings, specifications, or other data is not to be regarded by implication or otherwise as in any manner licensing the holder or any other person or corporation, or conveying any rights or permission to manufacture, use, or sell any patented invention that may in any way be related thereto.

DISTRIBUTION STATEMENT A: Approved for public release, distribution is unlimited.
NOTE: The drawing was approved by joint action of the Air Force and Navy Departments as Air Force - Navy Standard for this product. This drawing supersedes all antecedent standard drawings for the same product and shall become effective for the procurement of aeronautical supplies, or for use in new design not later than 6 months after the latest date of approval shown.
AMSC N/A

FED. SUP. CLASS
5340

INACTIVE FOR NEW DESIGN DATED 13 APRIL 1995

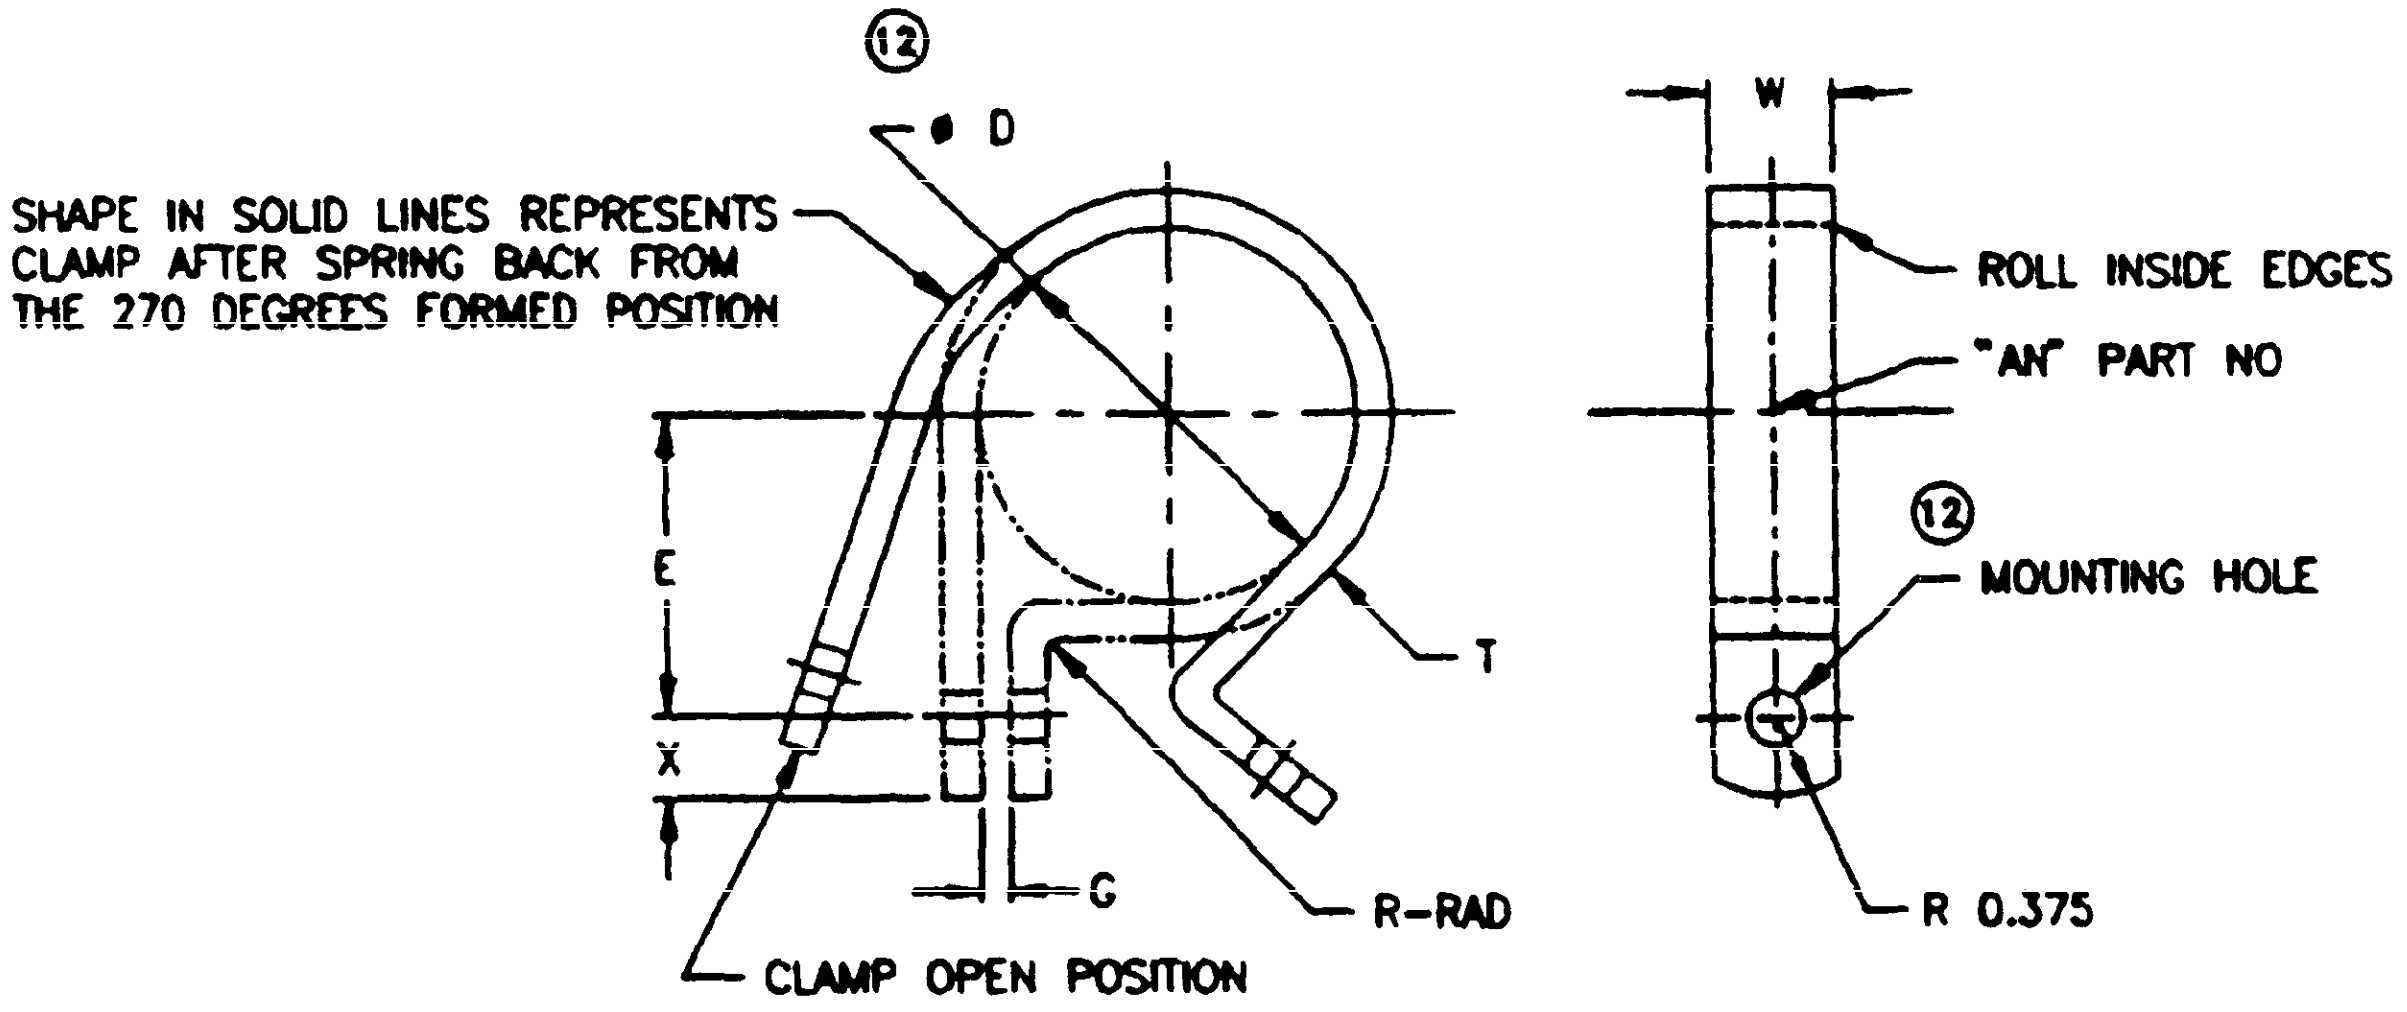

⑫
ø D
SHAPE IN SOLID LINES REPRESENTS CLAMP AFTER SPRING BACK FROM THE 270 DEGREES FORMED POSITION
E
X
G
T
R-RAD
CLAMP OPEN POSITION
W
ROLL INSIDE EDGES
"AN" PART NO
⑫
MOUNTING HOLE
R 0.375

REQUIREMENTS:

MATERIALS AND FINISH

(-) = AISI-1010 STEEL, TEMPER T 4 PER ASTM A 109
FINISH - CADMIUM PLATED PER QQ-P-416, TYPE II, CLASS 2

(D) = ALCLAD 2024-O, ALUMINUM ALLOY PER QQ-A-250/5
HEAT TREATED PER MIL-H-6088 TO T42 CONDITION
FINISH - CHEMICAL FILM PER MIL-C-5541, CLASS 1A

(F) = AISI-321 CORROSION RESISTANT STEEL PER AMS 5510
FINISH - PASSIVATED PER QQ-P-35 ⑫

NOTES:

1. EXAMPLE OF PART NUMBERS:

   AN742-8 = CLAMP, STEEL .500 ID

   AN742D8 = CLAMP, ALUMINUM ALLOY .500 ID

   AN742F8 = CLAMP, CORROSION RESISTANT STEEL .500 ID

2. THE PART NUMBER AND THE MANUFACTURER'S IDENTIFICATION SHALL BE MARKED ON EACH CLAMP
3. REMOVE ALL BURRS AND SHARP EDGES
4. DIMENSIONS ARE IN INCHES. UNLESS OTHERWISE SPECIFIED, TOLERANCES: ±.015
5. CLAMPS SHALL BE FURNISHED IN THE OPEN POSITION
6. FOR DESIGN FEATURE PURPOSES, THIS STANDARD TAKES PRECEDENCE OVER PROCUREMENT DOCUMENT REFERANCED HEREIN REFENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATION FOR BID
7. CODE "F" CLAMP MANUFACTURED FROM AMS 5510 CRES SHALL BE USED IN BOTH CORROSIVE AND HIGH TEMPERATURE ENVIRONMENT
8. CODE "H" CLAMP HAS BEEN SUPERSEDED BY CODE "F" CLAMP EFFECTIVE FROM THE DATE OF THIS DOCUMENT HOWEVER CODE "H" CLAMP SHALL BE USED UNTIL EXISTING STOCKS ARE DEPLETED

⑫ DENOTES CHANGES

APPROVED 21 JUL 44 REVISED ⑩ 28 AUG 87 ⑪ 30 DEC 93 ⑫ 13 APR 95

P.A.: NAVY-AS
CUSTODIANS:
AIR FORCE-99
ARMY-AV

AIR FORCE-NAVY AERONAUTICAL STANDARD

CLAMP, LOOP, PLAIN, SUPPORT, AIRCRAFT

AN742

PROCUREMENT SPECIFICATION
MIL-C-8603

SUPERSEDES USAF DWG 742 AND (WITH AN748)
SUPERSEDES NAF DWG 1051 TYPES 1 AND 2

PROJECT NO. 5340-2221

REVIEW ACTIVITIES
AF-82
ARMY-MI
DLA-IS
MARINE CORP-MC

FED. SUP. CLASS
5340

DASH NUMBERS	RIGID TUBE NOMINAL OD (REF)	D DIA ±.010	E		G	R ±.010	T			AL ALLOY		ALL STEEL		X
			ALUMINUM ALLOY	ALL STEEL			AL ALLOY	CARBON STEEL	HIGH TEMP CRES	W	MTG HOLE DIA ±.005	W	MTG HOLE DIA ±.005	
2	.125	.125	.360	.360	.062 +.016 −.000	.062	.0320 ±.0025	.0320 ±.0035	.020 ±.003	.500	.218	.375	.204	.188
3	.188	.188	.423	.423										
4	.250	.250	.457	.457										
5	.313	.313	.498	.498										
6	.375	.375	.529	.529										
7	.438	.438	.560	.560										
8	.500	.500	.592	.592										
9	.563	.563	.623	.623										
10	.625	.625	.654	.654										
11	.688	.688	.752	.749		.109	.050 ±.004		.032 ±.004			.500	.218	.218
12	.750	.750	.783	.780										
13	.813	.813	.814	.811										
14	.875	.875	.845	.842										
15	.938	.938	.877	.858										
16	1.000	1.000	.908	.889										
17	1.063	1.063	.939	.920										
18	1.125	1.125	.970	.951										
19	1.188	1.188	1.002	.983										
20	1.250	1.250	1.062	1.030	.094 +.031 −.000	.125	.063 ±.005							
21	1.313	1.313	1.093	1.061										
22	1.375	1.375	1.124	1.092										
23	1.438	1.438	1.156	1.124										
24	1.500	1.500	1.187	1.155										
25	1.563	1.563	1.218	1.186										
26	1.625	1.625	1.249	1.217										
27	1.688	1.688	1.281	1.249										
28	1.750	1.750	1.312	1.280										
29	1.812	1.812	1.344	1.312										
30	1.875	1.875	1.374	1.342										
31	1.938	1.938	1.406	1.374										
32	2.000	2.000	1.437	1.405										
							⑫	⑫				⑫		

⑫ DENOTES CHANGES

APPROVED 21 JUL 44 REVISED ⑫ FOR CHANGES SEE SHEETS , AND 3

NOTICE: When Government drawings, specifications or other data are used for any purpose other than in connection with a definitely related Government procurement operation, the United States Government thereby incurs no responsibility, nor any obligation whatsoever; and the fact that the Government may have formulated, furnished, or in any way supplied the said drawings, specifications, or other data is not to be regarded by implication or otherwise as in any manner licensing the holder or any other person or corporation, or conveying any rights or permission to manufacture, use, or sell any patented invention that may in any way be related thereto.

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.
NOTE: This drawing was approved by joint action of the Air Force and Navy Departments as the Air Force - Navy Standard for this product. This drawing supersedes all antecedent standard drawings for the same product and shall become effective for the procurement of aeronautical supplies, or for use in new design not later than 6 months after the latest date of approval shown.
AMSC N/A

P.A.: NAVY-AS
CUSTODIANS:
AIR FORCE-99
ARMY-AV

AIR FORCE-NAVY AERONAUTICAL STANDARD

CLAMP, LOOP, PLAIN, SUPPORT, AIRCRAFT

AN742

PROCUREMENT SPECIFICATION
MIL-C-8603

SUPERSEDES USAF DWG 742 AND (WITH AN743)
SUPERSEDES NAF DWG 1051 TYPES 1 AND 2

SHEET 2 OF 3

PROJECT NO. 5340-2221

DD FORM 1 MAY [illegible] 672 [illegible]

REVIEW ACTIVITIES:
AF-82
ARMY-MI
DLA-IS
MARINE CORP-MC

NOTICE: When Government drawings, specifications or other data are used for any purpose other than in connection with a definitely related Government procurement operation, the United States Government thereby incurs no responsibility, nor any obligation whatsoever; and the fact that the Government may have formulated, furnished, or in any way supplied the said drawings, specifications, or other data is not to be regarded by implication or otherwise as in any manner licensing the holder or any other person or corporation, or conveying any rights or permission to manufacture, use, or sell any patented invention that may in any way be related thereto.

DISTRIBUTION STATEMENT A: Approved for public release; distribution is unlimited.
NOTE: This drawing was approved by joint action of the Air Force and Navy Departments as an Air Force - Navy Standard for this product. This drawing supersedes all antecedent standard drawings for the same product and shall become effective for the procurement of aeronautical supplies, or for use in new design not later than 6 months after the latest date of approval shown.
AMSC N/A

FED. SUP. CLASS
5340

DASH NUMBERS	RIGID TUBE NOMINAL OD (REF)	D DIA ±.010	E		G	R ±.010	T			AL ALLOY		ALL STEEL		X
			ALUMINUM ALLOY	ALL STEEL			AL ALLOY	CARBON STEEL	HIGH TEMP CRES	W	MTG HOLE DIA ±.005	W	MTG HOLE DIA ±.005	
33	2.062	2.062	1.468	1.444	.125 +.031 -.000	.125	.063 ±.005	.040 ±.004	.040 ±.004	.500	.218	.500	.218	.218
34	2.125	2.125	1.499	1.475										
35	2.188	2.188	1.531	1.507										
36	2.250	2.250	1.562	1.538										
37	2.312	2.312	1.594	1.570										
38	2.375	2.375	1.624	1.600										
40	2.500	2.500	1.687	1.663										
42	2.625	2.625	1.752	1.728										
43	2.680	2.680	1.778	1.754										
44	2.750	2.750	1.812	1.788										
45	2.812	2.812	1.844	1.820										
46	2.875	2.875	1.875	1.851										
48	3.000	3.000	1.937	1.913										
50	3.125	3.125	2.000	1.976										
52	3.250	3.250	2.062	2.038										
54	3.375	3.375	2.125	2.101										
56	3.500	3.500	2.187	2.163										
58	3.625	3.625	2.250	2.226										
64	4.000	4.000	2.437	2.413										
66	4.125	4.125	2.500	2.476										

⑫ DENOTES CHANGES

APPROVED 21 JUL 44 REVISED ⑫ FOR CHANGES SEE SHEETS 1, 2, AND 3

P.A.: NAVY-AS
CUSTODIANS:
AIR FORCE-99
ARMY-AV

AIR FORCE-NAVY AERONAUTICAL STANDARD

CLAMP, LOOP, PLAIN, SUPPORT, AIRCRAFT

AN742

PROCUREMENT SPECIFICATION
MIL-C-8603

SUPERSEDES USAF DWG 742 AND (WITH AN743)
SUPERSEDES NAF DWG 1051 TYPES 1 AND 2

SHEET 3 OF 3

DD FORM 1 MAY 60 672 PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

PROJECT NO. 5340-2221