INCH-POUND


MIL-DTL-83420/4C
5 November 2001
SUPERSEDING
MIL-DTL-83420/4B
21 December 2000

DETAIL SPECIFICATION SHEET

WIRE ROPE, FLEXIBLE, TYPE II (JACKETED), COMPOSITION B

* This specification sheet is approved for use by all Departments and Agencies of the Department of Defense.

* The requirements for acquiring the product described herein shall consist of this specification sheet and the issue of MIL-DTL-83420 and QPL-83420 listed in that issue of the Department of Defense Index of Specifications and Standards (DoDISS) specified in the solicitation.

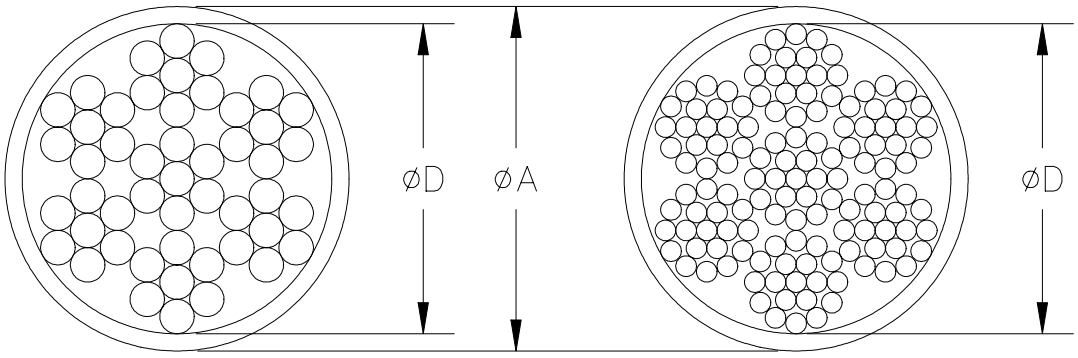

WIRE ROPE, 7 x 7 WIRE ROPE, 7 x 19

NOTES:

1. Unless otherwise specified, all dimensions are in inches.
* 2. QPL-83420 applies to the products listed herein.

FIGURE 1. Wire rope, flexible, type II, (jacketed) composition B.

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T08:05Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

* 1. Material: Corrosion Resistant steel (see MIL-DTL-83420).

TABLE I. Dash numbers.

*

Dash number	Nominal diameter of wire rope	Diameter "A" outside diameter of jacket	Type of construction	Breaking strength (lbs.)	Length per reel (ft.) 1/
001	3/64	1/16	7 x 7	270	1,000
002	1/16	3/32	7 x 7	480	1,000
003	3/32	1/8	7 x 19	920	100
004	3/32	1/8	7 x 19	920	1,000
005	3/16	1/4	7 x 19	3,700	1,000
006	1/4	5/16	7 x 19	6,400	500
007	1/4	5/16	7 x 19	6,400	1,000
008	1/32	3/64	3 x 7	110	1,000
009	3/64	5/64	7 x 7	270	1,000
010	1/16	1/8	7 x 7	480	1,000
011	1/16	3/32	7 x 19	480	1,000
012	1/16	1/8	7 x 19	480	1,000
013	3/32	1/8	7 x 7	920	1,000
014	3/32	5/32	7 x 7	920	1,000
015	3/32	5/32	7 x 19	920	100
016	1/8	3/16	7 x 19	1,760	1,000
017	5/32	7/32	7 x 19	2,400	1,000
018	5/32	9/32	7 x 19	2,400	1,000
019	3/16	5/16	7 x 19	3,700	1,000
020	7/32	9/32	7 x 19	5,000	1,000
021	7/32	11/32	7 x 19	5,000	1,000
022	1/4	3/8	7 x 19	6,400	1,000
023	9/32	13/32	7 x 19	7,800	1,000
024	5/16	7/16	7 x 19	9,000	1,000
025	3/8	1/2	7 x 19	12,000	1,000


1/ or as specified in the purchase order.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T08:05Z
Check the source to verify that this is the current version before use.

* NOTE:

* 1. The part or identifying number (PIN) consists of the letter "M", the basic number of this specification sheet, and a dash number taken from table I.

EXAMPLE: M 83420/4-004

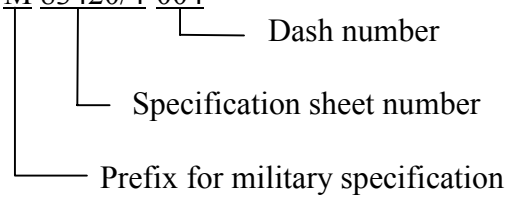

* M83420/4-004 Indicates - Wire Rope, Flexible, Type II, Corrosion Resistant Steel, Jacketed, Construction; 7 x 19, Nominal Diameter 3/32, 1/8 Outside Diameter Jacket

CHANGES FROM PREVIOUS ISSUE: The margins of this specification sheet are marked with asterisks to indicate where changes from the previous issue were made. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations and relationship to the last previous issue.

Custodians:
Army - AV
Navy - AS
Air Force - 99

Preparing activity:
DLA - GS5

(Project 4010-0123)

Reviewers:
Army - MI
Air Force - 71

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T08:05Z
Check the source to verify that this is the current version before use.