MILITARY SPECIFICATION SHEET

HULL FITTING, STUFFING TUBE, TYPE MX7637/U FOR FLEXIBLE, SOLID-DIELECTRIC, RADIO-FREQUENCY CABLE

This specification is approved for use within the Naval Sea Systems Command, Department of the Navy, and is available for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the stuffing tube described herein shall consist of this specification and the latest issue of MIL-H-21367(SH).


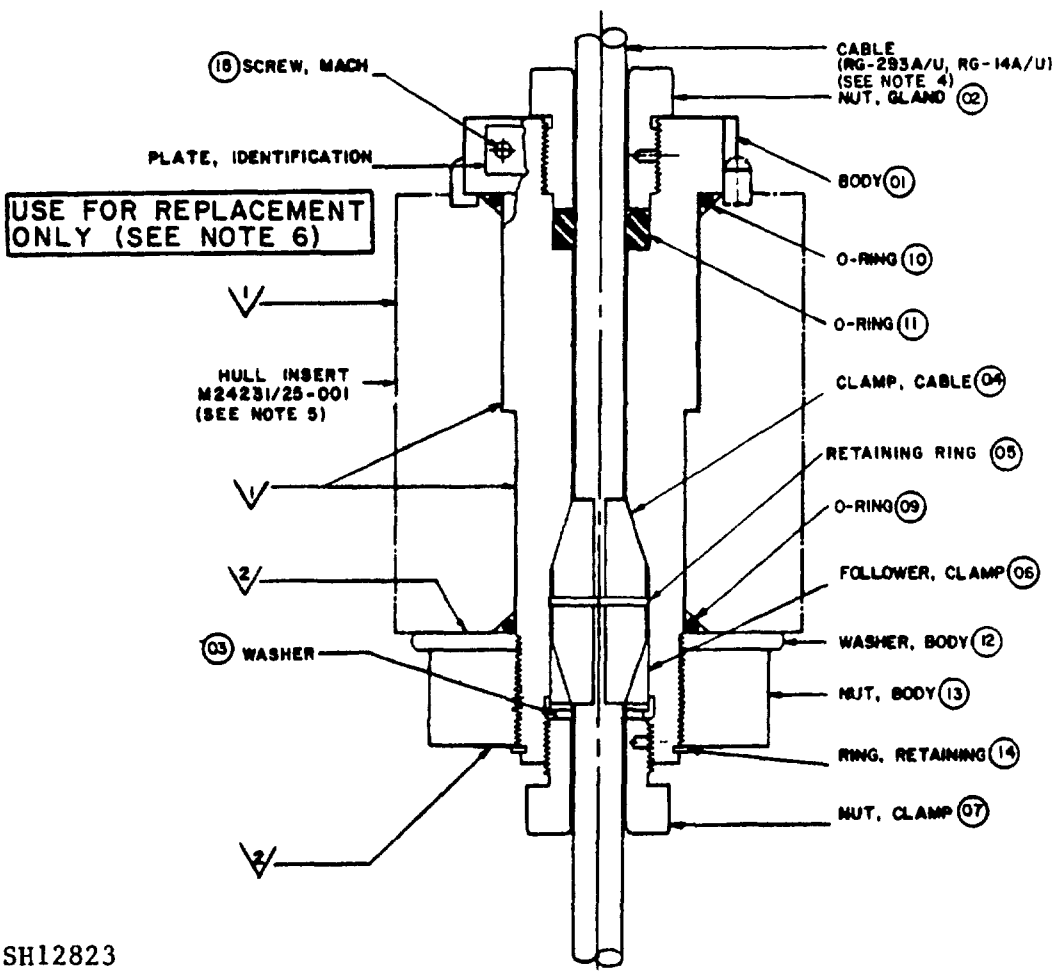


FIGURE 1. Assembly M21367/7-001 (MX7637/U).

FSC 5975


DISTRIBUTION STATEMENT A Approved for public release; distribution unlimited

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T09:23Z
Check the source to verify that this is the current version before use.

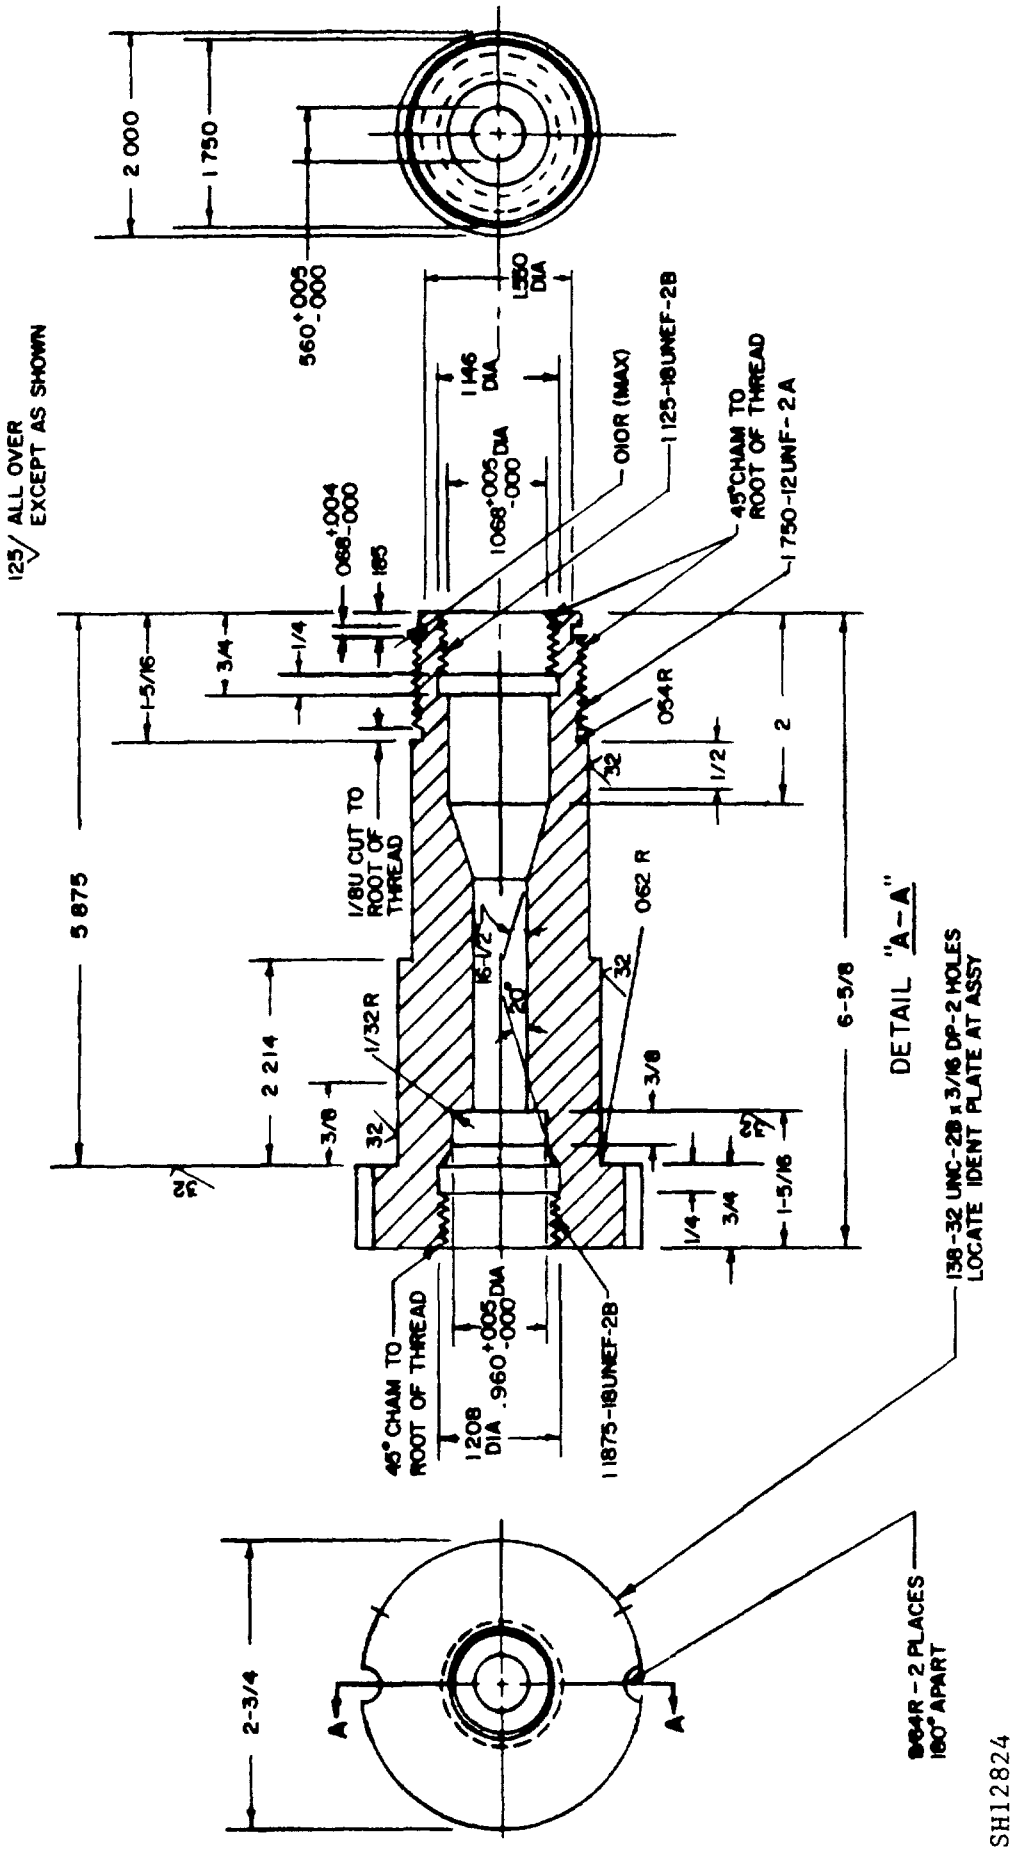


01 FIGURE 2. Body.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T09:23Z
Check the source to verify that this is the current version before use.

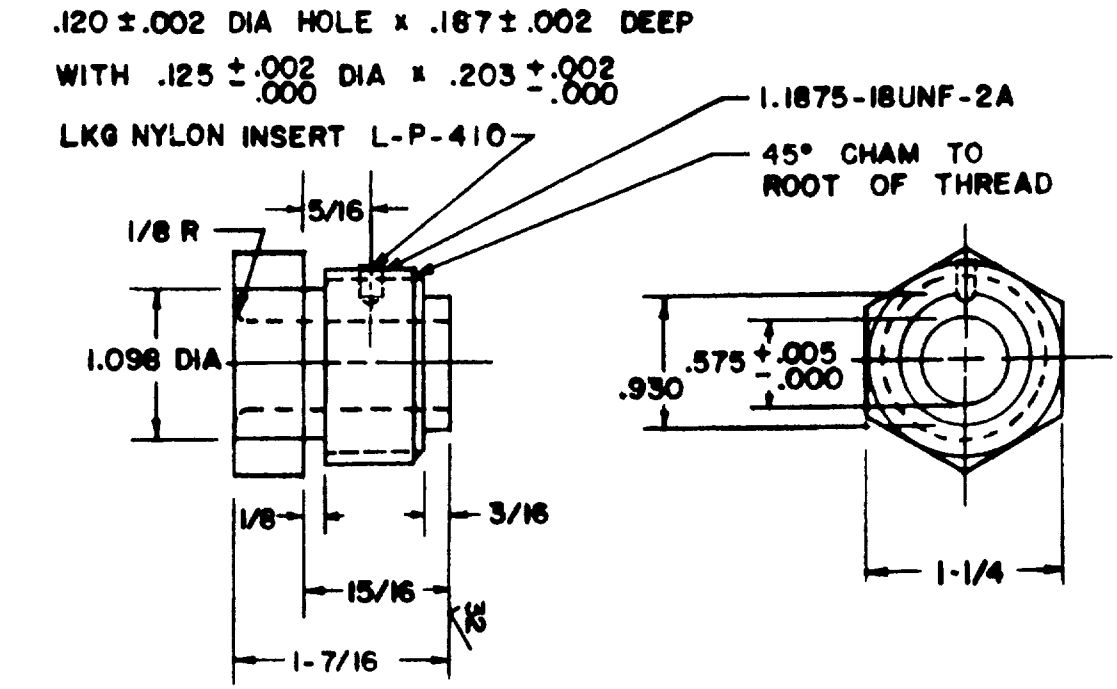

SH12825


02 FIGURE 3. Gland nut.

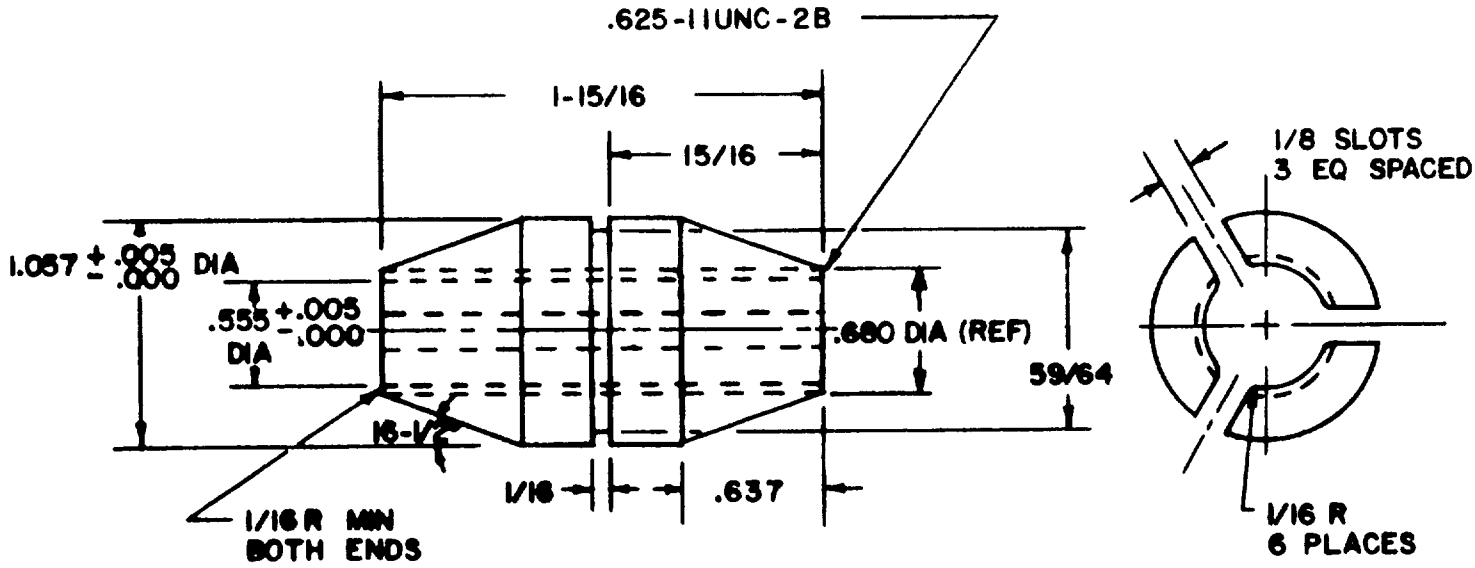

SH12826


04 FIGURE 4. Cable clamp.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T09:23Z
Check the source to verify that this is the current version before use.

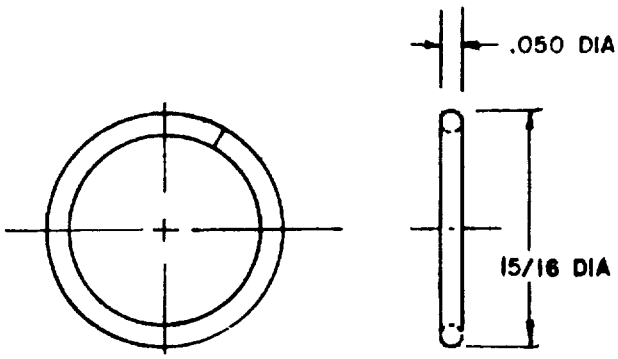


SH12827

(05) FIGURE 5. Retaining ring.

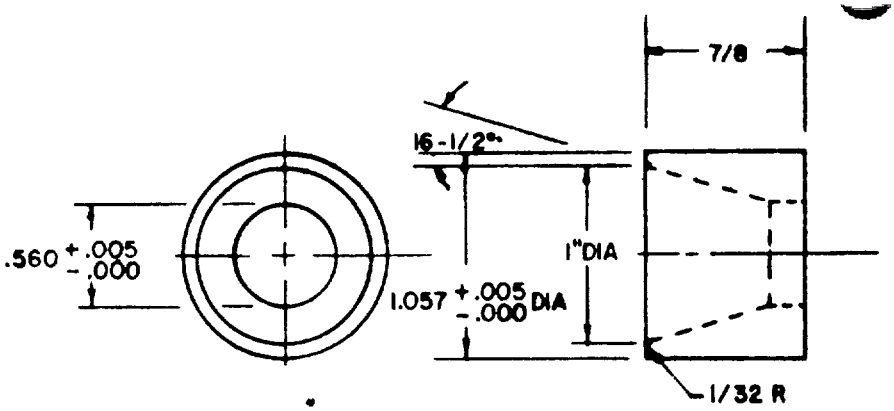


SH12828

(06) FIGURE 6. Clamp follower.

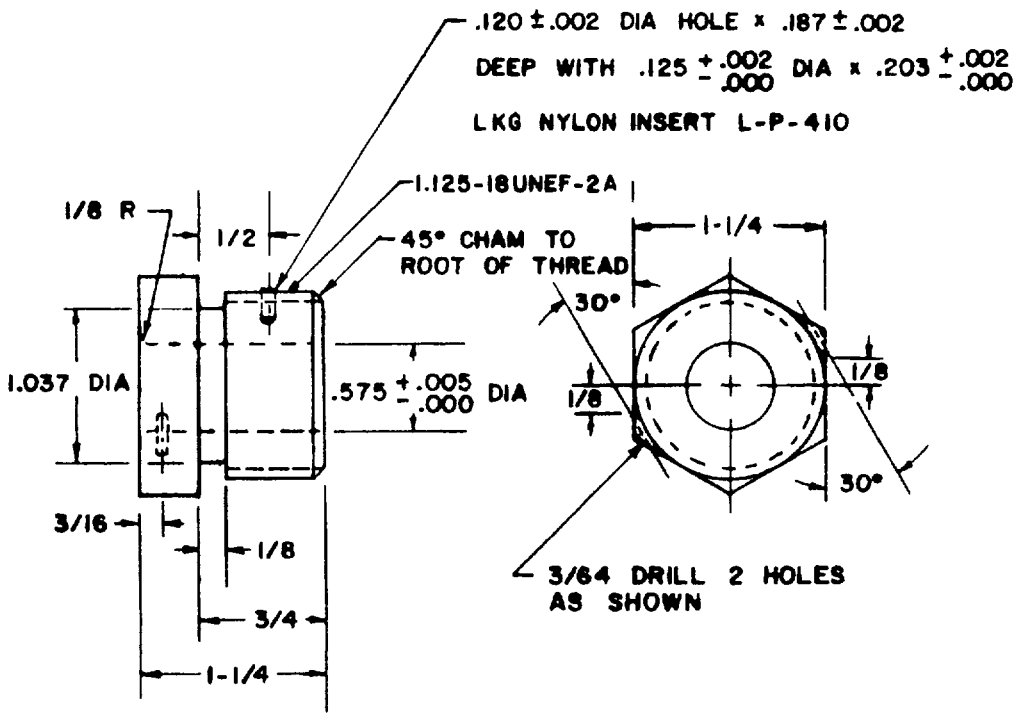

SH12829

(07) FIGURE 7. Clamp nut.

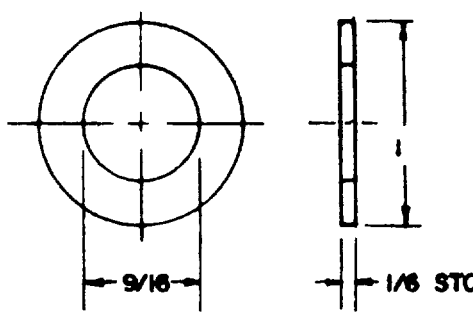

SH12830

(03) FIGURE 8. Washer.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T09:23Z
Check the source to verify that this is the current version before use.

TABLE I. Standard parts.

Item no. 1/	Description	Fig	Qty	Material/spec	Formerly covered on Drawing
01	Body	2	1	NI-CU-AL Alloy, QQ-N-286 CL A, AN and AH	00841-D2
02	Gland Nut	3	1	NI-AL-BRZ, MIL-B-24059	44186-B
03	Washer	8	1	Nylon, MIL-M-20693, Type VI	44189-A
04	Cable Clamp	4	1	NI-AL-BRZ, MIL-B-24059	44191-B
05	Retaining Ring	5	1	Brass, QQ-W-321, Cond. Spring, Comp B	44192-A
06	Clamp Follower	6	1	NI-AL-BRZ, MIL-B-24059	44190-A
07	Clamp Nut	7	1	NI-AL-BRZ, MIL-B-24059	44188-B
08	Round Head Machine Screw		2	CRES 0.138-32 UNC-2A x 3/16 L	
09	O-Ring		1	MS28775-327	
10	O-Ring		1	MS28775-329	
11	O-Ring		1	MS28775-014	44187-A
12	Body Washer		2	MIL-H-21367/1, Fig. 8	
13	Body Nut		1	MIL-H-21367/1, Fig. 9	
14	Retaining Ring		1	TRUARC-Type 5100-162W or equal	
15	Round Head, Machine Screw 0.138-32UNC-2A x 3/16 L		2	NI-CU Alloy, QQ-N-281 CL A	

1/ Item numbers are the same as numbers shown in circles on figures.

NOTES:

1. Military part number M21367/7-001.
2. All dimensions in inches.
3. Unless otherwise specified herein, tolerances shall be plus or minus 1/64-inch for fractions and plus or minus 0.005 for decimals. Angular tolerance shall be plus or minus 1/2 degree.
4. Type RG-293A/U conforms to MIL-C-23020/1.
5. Hull insert M24231/25-002 conforms to MIL-C-24231/25.
6. Type MX7637/U should be used for replacement purposes only. For new installations, use type MX8208 conforming to MIL-H-21367/1.

Preparing activity:
Navy - SH
(Project 5975-N578-7)

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T09:23Z
Check the source to verify that this is the current version before use.