MIL-F-52525/9A
30 June 1987
SUPERSEDING
MIL-F-52525/9
11 October 1978

MILITARY SPECIFICATION SHEET

FITTINGS, WIRE REINFORCED HYDRAULIC HOSE AND CLAMP-HALVES: FIELD ATTACHABLE (REUSABLE), SCREW-ON TO 37° FLARE FEMALE SWIVEL, STRAIGHT, TYPE 100R10, FOR USE WITH TYPE 100R10 4-SPIRAL WRAP HOSE

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the fittings described herein shall consist of this document and the latest issue of MIL-F-52525.

REQUIREMENTS:

1. The fitting shall conform to figure 1 and table I.

AMSC N/A FSC 4730
DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T21:22Z
Check the source to verify that this is the current version before use.

TABLE I. Dimensions for type 100R10 fittings.1/

Specification part number	Hose dash number	Nominal hose I.D.	Tube dash number	Nominal tube O.D.	Nominal thread size	L Maximum		M Minimum	
		inch		inch		inch	mm	inch	mm
M52525/9-12-12	12	3/4	12	3/4	1-1/16-12	1.625	41.3	0.469	11.9
M52525/9-16-16	16	1	16	1	1-5/16-12	2.000	50.8	0.563	14.3
M52525/9-20-20	20	1-1/4	20	1-1/4	1-5/8-12	2.625	66.7	0.563	14.3
M52525/9-24-24	24	1-1/2	24	1-1/2	1-7/8-12	2.875	73.0	0.661	16.8

Specification part number	Hose dash number	Nominal hose I.D.	Tube dash number	Nominal tube O.D.	Nominal thread size	N		P	
		inch		inch		inch +0.016 -0.000	mm +0.8 -0.4	inch +0.005 -0.000	mm -0.13 -0.00
M52525/9-12-12	12	3/4	12	3/4	1-1/16-12	0.562	14.3	0.850	21.59
M52525/9-16-16	16	1	16	1	1-5/16-12	0.594	15.1	1.000	25.40
M52525/9-20-20	20	1-1/4	20	1-1/4	1-5/8-12	0.625	15.9	1.410	35.81
M52525/9-24-24	24	1-1/2	24	1-1/2	1-7/8-12	0.734	18.6	1.625	41.28

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T21:22Z
Check the source to verify that this is the current version before use.

TABLE I. Dimensions for type 100R2 fitting.1/ (Continued)

Specification part number	Hose dash number	Nominal hose I.D. inch	Tube dash number	Nominal tube O.D. inch	Nominal thread size	Q Minimum inch	Q Minimum mm	C Maximum inch	C Maximum mm
M52525/9-12-12	12	3/4	12	3/4	1-1/16-12	0.61	15.5	5.82	147.8
M52525/9-16-16	16	1	16	1	1-5/16-12	0.78	19.8	4.79	121.7
M52525/9-20-20	20	1-1/4	20	1-1/4	1-5/8-12	1.01	25.7	6.75	171.5
M52525/9-24-24	24	1-1/2	24	1-1/2	1-7/8-12	1.25	31.8	7.21	183.1

1/ All dimensions not shown shall conform to SAE J516.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T21:22Z
Check the source to verify that this is the current version before use.

2. Maximum operating pressures shall be as specified in table II.

TABLE II. Maximum operating pressures of fittings.

Hose I.D. (REF) (inch)	PSI (pounds per square inch)	MPa (megapascals)
3/4	5000	34.5
1	4000	27.6
1-1/4	3000	20.7
1-1/2	2500	17.2

3. The over-tightening torque for swivel nuts shall be as specified in table III.

TABLE III. Over-tightening torque for swivel nut.

Nominal tube O.D. (REF) (inch)	Torque	
	inch pounds	Newton meter (N·m) 1/
3/4	900	101.7
1	1200	135.6
1-1/4	1900	214.7
1-1/2	2700	305.1

1/ Torque is expressed as Newton meter per radian (N·m/rad)·rad = N·m.

4. Marking shall include the manufacturer's name or trademark, size, and hose identifier R-10. Location of marking is optional.

5. Method of fabrication and assembly of swivel nut is optional.


6. This item must be listed on QPL-52525.

INTENDED USE: Type 100R10 fittings are for use with 4-spiral wrap reinforced hose conforming to MIL-H-52471, type 100R10.

CATALOGING DATA: The military specification part number is a definitive part number which corresponds to the size fitting covered by this specification sheet. The military specification sheet number, code number for size of hose, and code number for size of tube are combined to form the military specification part number.

Source: https://assist.dla.mil -- Downloaded: 202610-22T21:22Z
Check the source to verify that this is the current version before use.

EXAMPLE: Military specification part number



The approved item name of this item, in accordance with the Federal Item Name Directory for the Federal Catalog System, Handbook H6, Section A, is Adapter, Tube to Hose.

Custodian:
Army - ME


Review activities:
Army - GL
DLA - CS

User activity:
Air Force - 99

Preparing activity:
Army - ME

Project 4730-0525

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T21:22Z
Check the source to verify that this is the current version before use.

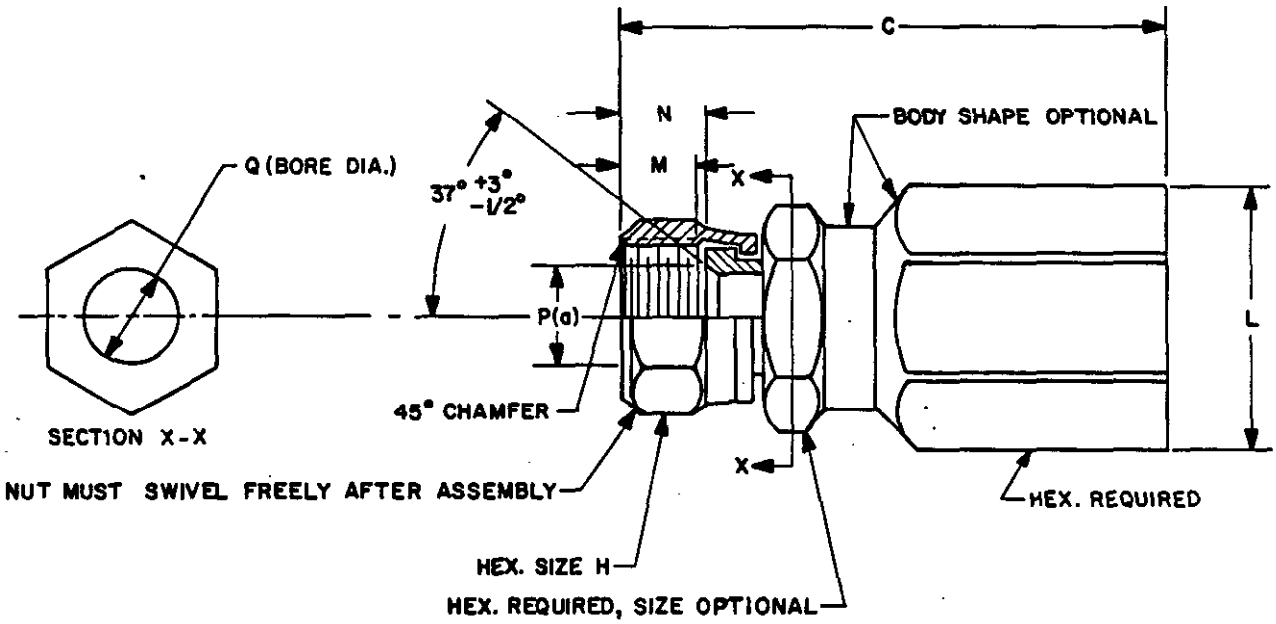

(a) DIMENSION P TO BE CONCENTRIC WITH DIMENSION Q WITHIN 0.015 F I M.

FIGURE 1. Fitting, screw-on to 37° flare, straight.

X-3355A

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T21:22Z
Check the source to verify that this is the current version before use.