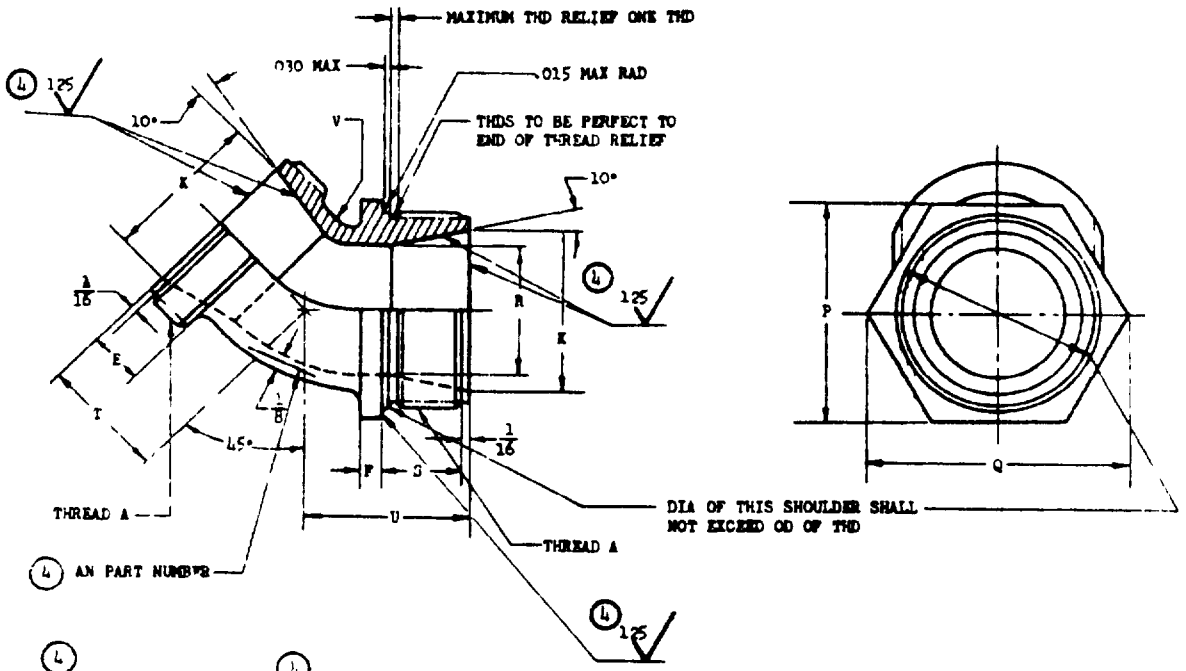


AN PART NUMBER	CONDUIT SIZE	THREAD A	E	F	K DIA	P	Q (APPROX)	R ±.010 DIA	S	T	U	V RAD
AN3060-3	3/16	1/2-28 UNEF-2A	3/8	1/8	.332	11/16	51/64	.167	5/8	5/8	29/32	3/16
AN3060-4	1/4	5/8-24 UNEF-2A	3/8	1/8	.394	13/16	15/16	.229	5/8	21/32	15/16	3/16
AN3060-6	3/8	3/4-20 UNEF-2A	3/8	1/8	.519	15/16	1-3/32	.354	5/8	11/16	31/32	3/16
AN3060-8	1/2	7/8-20 UNEF-2A	3/8	3/16	.669	1-1/16	1-15/64	.479	11/16	3/4	1-1/8	1/4
AN3060-10	5/8	1 -20 UNEF-2A	3/8	3/16	.794	1-1/4	1-7/16	.604	11/16	3/4	1-5/32	1/4
AN3060-12	3/4	1-3/16-18 NEF-2A	3/8	3/16	.929	1-3/8	1-19/32	.729	11/16	25/32	1-3/16	1/4
AN3060-16	1	1-7/16-18 NEF-2A	3/8	3/16	1.214	1-5/8	1-7/8	.979	11/16	31/32	1-1/4	5/16
AN3060-20	1-1/4	1-3/4-18 NS-2A	7/16	3/16	1.469	2	2-5/16	1.229	3/4	1-1/16	1-13/32	3/8
AN3060-24	1-1/2	2- 18 NS-2A	1/2	3/16	1.724	2-3/16	2-17/32	1.479	13/16	1-5/32	1-9/16	7/16
AN3060-28	1-3/4	2-1/4-16 UN-2A	1/2	1/4	1.976	2-7/16	2-13/16	1.729	7/8	1-7/32	1-11/16	7/16
AN3060-32	2	2-1/2-16 UN-2A	9/16	1/4	2.229	2-13/16	3-1/4	1.979	15/16	1-1/4	1-27/32	7/16
AN3060-40	2-1/2	3 -16 UN-2A	5/8	1/4	2.744	3-3/8	3-57/64	2.479	1	1-3/8	2	7/16

(4) THREADS SHALL BE IN ACCORDANCE WITH MIL-S-7742 EXCEPT 1-3/4-18 NS-2A AND 2-18 NS-2A THREADS WHICH SHALL BE IN ACCORDANCE WITH AMERICAN STANDARD ASA B-1.

(4) MATERIAL ALUMINUM ALLOY, SPECIFICATION QQ-A-601, CLASS 4 OR ALUMINUM ALLOY DIE CASTINGS OF COMMERICAL GRADE SUITABLE TO THE PROCURING ACTIVITY.

(4) FINISH THE SURFACE FINISH SHALL BE IN ACCORDANCE WITH STANDARD MIL-STD-10.
CADMIUM PLATE, SPECIFICATION QQ-P-416, TYPE II, CLASS C.

REMOVE ALL BURRS AND SHARP EDGES.

DIMENSIONS IN INCHES. UNLESS OTHERWISE SPECIFIED, TOLERANCES: FRACTIONS ±1/64, DECIMALS ±.005, ANGLES ±1/2°.

NOTE: This drawing was approved by [illegible] section of the Air Force and Navy Departments on the Air Force Navy standard for like product. This drawing supersedes all supersedes standard drawings for the same product and shall become obsolete for the procurement of aeronautical supplies, or for any to new designs not later than 6 months after the latest date of approval shown.

APPROVED [illegible] Apr 43 REVISED (1) 23 Dec 44 (2) 5 Jul 45 (3) [illegible] 43 (4) 16 Apr 53

PROCUREMENT SPECIFICATION	AIR FORCE-NAVY AERONAUTICAL STANDARD	AN3060
NONE	(4) ELBOW - ELECTRICAL CONDUIT, 45°	

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T14:18Z
Check the source to verify that this is the current version before use.