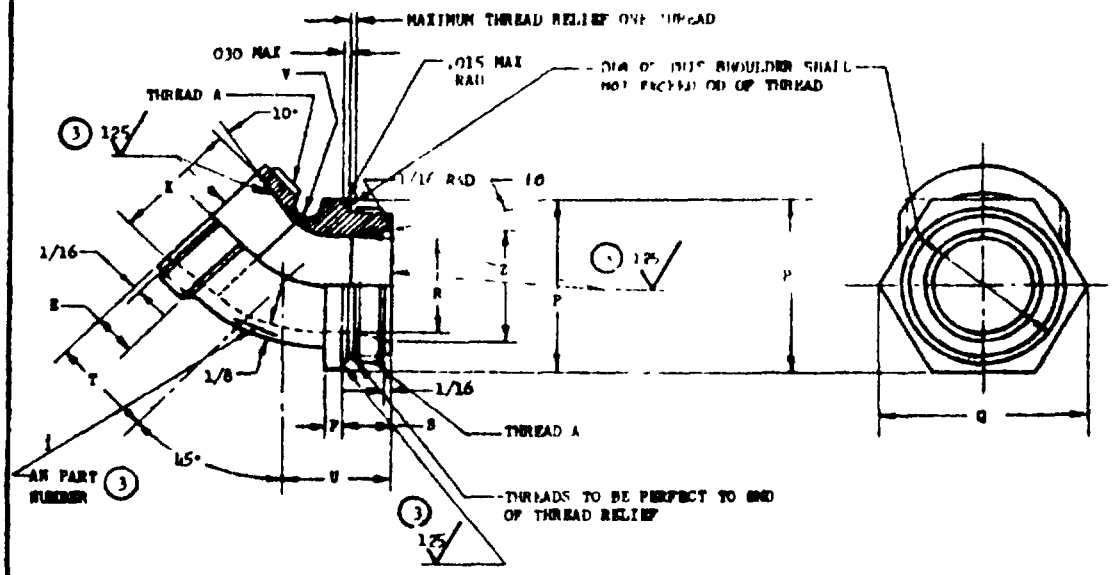


2 AN PART NO.	CONDUIT SIZE	3 THREAD A	E	F	K DIA	P	Q (APPROX)	R ±.010 DIA	S	T	U	V RAD	Z DIA
AN3061-3	3/16	1/2 -28 UNEF-2A	3/8	1/8	.332	11/16	51/64	.187	9/32	5/8	9/16	3/16	.231
AN3061-4	1/4	5/8 -24 NEF-2A	3/8	1/8	.394	13/16	15/16	.229	9/32	21/32	19/32	3/16	.273
AN3061-6	3/8	3/4 -20 UNEF-2A	3/8	1/8	.519	15/16	1- 3/32	.354	9/32	11/16	5/8	3/16	.398
AN3061-8	1/2	7/8 -20 UNEF-2A	3/8	3/16	.669	1- 1/16	1-15/64	.479	11/32	3/4	25/32	1/4	.548
AN3061-10	5/8	1 -20 UNEF-2A	3/8	3/16	.794	1- 1/4	1- 7/16	.604	11/32	3/4	13/16	1/4	.673
AN3061-12	3/4	1-3/16-18 NEF-2A	3/8	3/16	.929	1- 3/8	1-19/32	.729	11/32	25/32	27/32	1/4	.808
AN3061-16	1	1-7/16-18 NEF-2A	3/8	3/16	1.214	1- 5/8	1- 7/8	.979	11/32	31/32	29/32	5/16	1.093
AN3061-20	1-1/4	1-3/4 -18 NS-2A	7/16	3/16	1.469	2	2 5/16	1.229	3/8	1-1/16	1-1/32	3/8	1.337
AN3061-24	1-1/2	2 -18 NS-2A	1/2	3/16	1.724	2- 3/16	2-17/32	1.479	13/32	1-5/32	1-5/32	7/16	1.581
AN3061-28	1-3/4	2-1/4 -16 UN-2A	1/2	1/4	1.976	2- 7/16	2-13/16	1.729	7/16	1-7/32	1-1/4	7/16	1.822
AN3061-32	2	2-1/2 -16 UN-2A	9/16	1/4	2.229	2-13/16	3- 1/4	1.979	15/32	1-1/4	1-3/8	7/16	2.064
AN3061-40	2-1/2	3 -16 UN-2A	5/8	1/4	2.744	3- 3/8	3-57/64	2.479	1/2	1-3/8	1-1/2	7/16	2.568

3 THREADS SHALL BE IN ACCORDANCE WITH SPECIFICATION MIL-S-7742 EXCEPT 1-3/4-18 NS-2A AND 2-18 NS-2A THREADS WHICH SHALL BE IN ACCORDANCE WITH AMERICAN STANDARD ASA B-1.

3 MATERIAL: ALUMINUM ALLOY, SPECIFICATION QQ-A-601 CLASS 4, OR ALUMINUM ALLOY DIE CASTINGS OF COMMERCIAL GRADE SUITABLE TO THE PROCURING ACTIVITY

3 FINISH: THE SURFACE FINISH SHALL BE IN ACCORDANCE WITH STANDARD MIL-STD-10. CADMIUM PLATE, SPECIFICATION QQ-P-416, TYPE II, CLASS C

REMOVE ALL BURRS AND SHARP EDGES

DIMENSIONS IN INCHES UNLESS OTHERWISE SPECIFIED, TOLERANCES: FRACTIONS ±1/64, DECIMALS ±.005, ANGLES ±1/2° .

APPROVED 21 Jan 43 REVISED 1 23 Dec 44 2 4 Aug 50 3 16 Apr 53

PROCUREMENT SPECIFICATION	AIR FORCE-NAVY AERONAUTICAL STANDARD	AN3061
NONE	1 ELBOW - ELECTRICAL CONDUIT, 45° JUNCTION BOX	

SUPERSEDES AAF DRAWING 1148

Source: https://assist.dla.mil -- Downloaded: 202610-26T14:18Z
Check the source to verify that this is the current version before use.