

NOTICE: When Government drawings specifications, or other data are used for any purpose other than in connection with a definitely related Government procurement operation, the United States Government thereby incurs no responsibility nor any obligation whatsoever; and the fact that the Government may have formulated, furnished, or in any way supplied the said drawings, specifications, or other data is not to be regarded by implication or otherwise as in any manner licensing the holder or any other person or corporation or conveying any rights or permission to manufacture, use or sell any patented invention that may in any way be related thereto.


NOTE: This document was approved by joint action of the War and Navy Departments as the Army-Navy standard and for this product this drawing supersedes all antecedent standard drawings for the same product and shall become effective for the procurement of aeronautical supplies, or for use in new design, not later than 6 months after the latest date of approval shown. It may be put into effect, however, at an earlier date after promulgation.

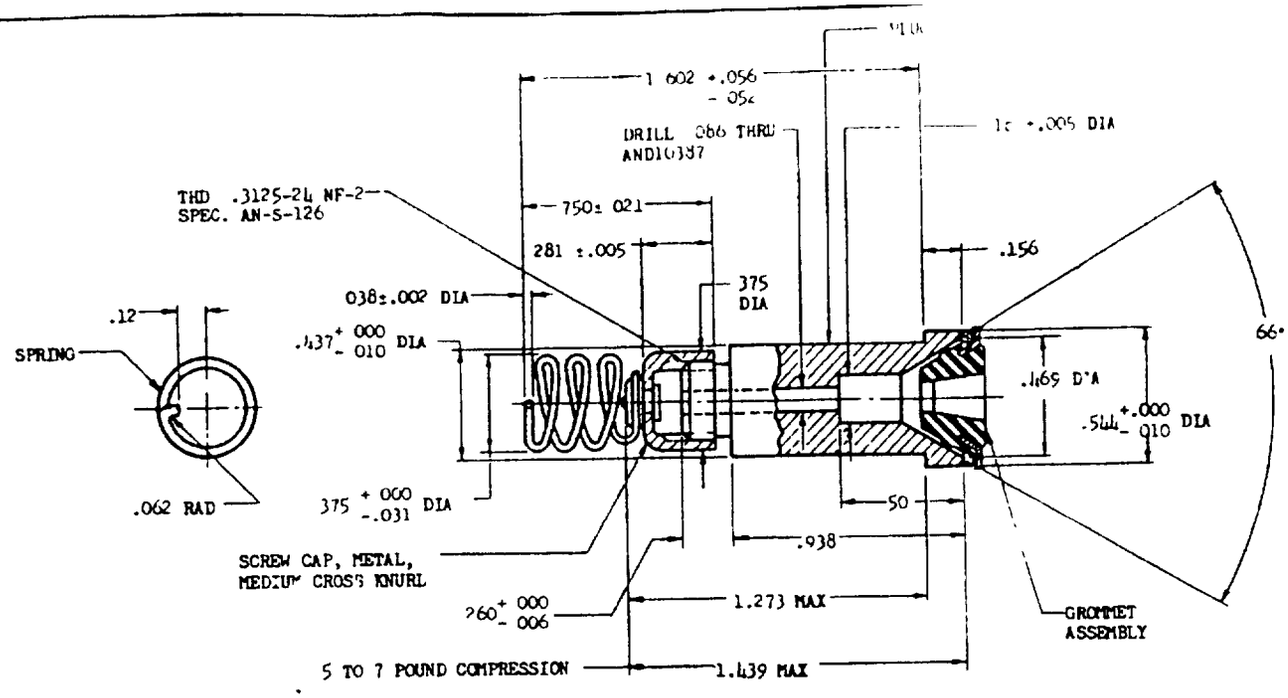

ASSEMBLY

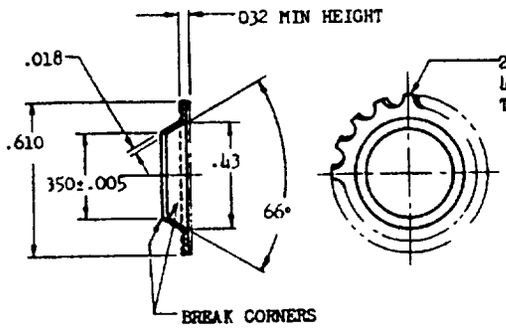

INSERT - GROMMET (ENLARGED) ③

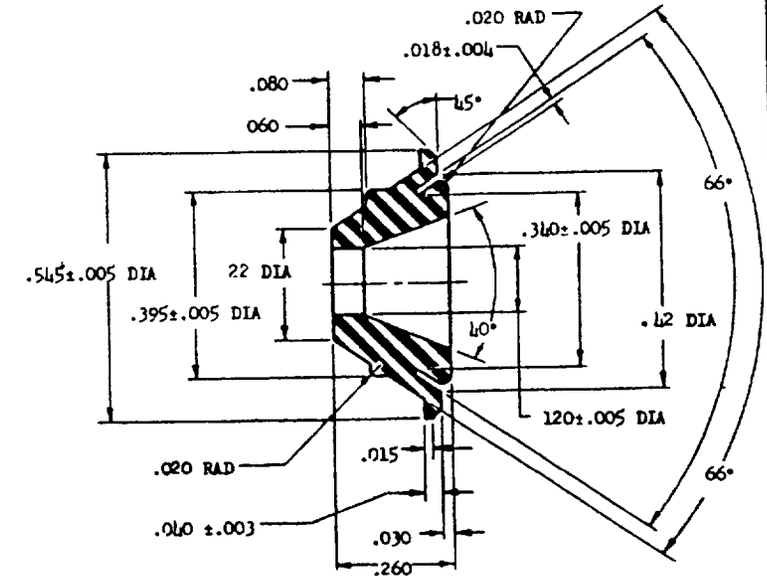

GROMMET (ENLARGED)

③

AN ASSEMBLY PART NO.	AN PART NO. SPRING	PLUG	(b) COLLAR	(b) SPACER	(b) NUT SERRATED	(b) NUT HEX	GROMMET ASSEMBLY
(a) ~~AN3105-1~~	~~AN3105-2~~	~~AN3105-3~~	~~AN3105-4~~	~~AN3105-5~~	~~AN3105-6~~		
(a) ~~AN3105-7~~	~~AN3105-2~~	~~AN3105-3~~	~~AN3105-4~~	~~AN3105-5~~		~~AN3105-8~~	
(a) AN3105-9	AN3105-2	AN3105-3					AN3105-10

③ (a) ASSEMBLY PART NUMBERS AN3105-1 AND AN3105-7 INACTIVE FOR DESIGN AFTER 12 DEC 47. ASSEMBLY PART NUMBER AN3105-9 REPLACES AN3105-1 AND AN3105-7.

③(b) PART NUMBERS AN3105-4, -5, -6, AND -8 INACTIVE FOR DESIGN AFTER 12 DEC 47 NO SUPERSEDING AN STANDARDS

③MATERIAL SPRING; BERYLLIUM COPPER WIRE 1.75 TO 2.25 PERCENT BERYLLIUM, 0.75 PERCENT OTHER ADDITIVE ELEMENTS, 0.50 PERCENT IMPURITIES, REMAINDER COPPER. CONDITION COLD DRAWN-QUARTER HARD INSERT-GROMMET, STEEL, SPRING TEMPERED HARDNESS, ROCKWELL C40-45 GROMMET, OIL RESISTANT SYNTHETIC RUBBER PLUG, PLASTIC

④

③FINISH INSERT-GROMMET, CADMIUM PLATE SPECIFICATION QQ-P-416.

DIMENSIONS IN INCHES UNLESS OTHERWISE SPECIFIED, TOLERANCES TWO PLACE DECIMALS ±.02, THREE PLACE DECIMALS ±.010, ANGLES ±2°.

Custodian
ARMY - AV
NAVY - AS

Preparing activity
Air Force - 85

(Project No 5940-1152)

Review activity
Air Force - 99, DLA - GS

APPROVED 30 May 42 REVISED ① 20 Feb 43 ② 29 Nov 44 ③ 12 Dec 47 ④ 27 Jul 93

PROCUREMENT SPECIFICATION	ARMY-NAVY AERONAUTICAL STANDARD	AN3105
NONE	TERMINAL, GROUND	

Source: https://assist.dla.mil - Downloaded: 2026-03-26T14:19Z
Check the source to verify that this is the current version before use.