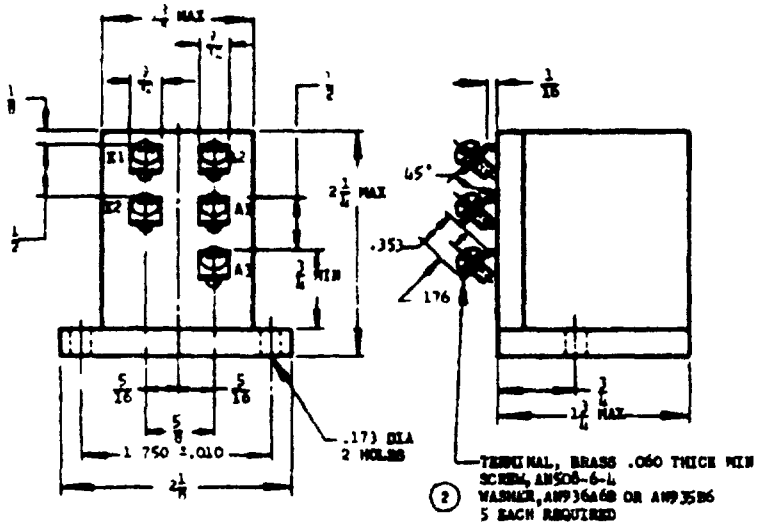



DETAIL REQUIREMENTS

(A)	MAXIMUM OPERATING VOLTAGE	29 VOLTS
(B)	PICKUP VOLTAGE	18 VOLTS
(C)	DROPOUT VOLTAGE	7 VOLTS +0, -5.5
(D)	RATED LOAD:	

	NORMALLY OPEN	NORMALLY CLOSED
RESISTIVE	10 AMP	10 AMP
INDUCTIVE		
MOTOR	6 AMP	6 AMP

(E)	COIL CURRENT	0.2 AMP
(F)	MINIMUM OPERATING PERIOD	3 HOURS
(G)	MINIMUM OPERATING CYCLES	50,000
(H)	MAXIMUM WEIGHT	0.4 POUND
(I)	RATED DUTY	CONTINUOUS
(J)	NOMINAL COIL VOLTAGE	28 VOLTS

AN PART NO.
AN3314-1

DIMENSIONS IN INCHES. UNLESS OTHERWISE SPECIFIED, TOLERANCES: FRACTIONS ±1/64, DECIMALS ±.005, ANGLES ±5°

OVERLOAD, RUPTURE, AND CONTACT DROP OF SPECIFICATION MIL-R-6106 ARE NOT APPLICABLE.

INACTIVE FOR DESIGN AFTER 17 NOVEMBER 1954 NO SUPERSEDING STANDARD

FOR DEFINITION AND APPLICATION OF DRAWING STATUS NOTES, SEE AMA BULLETIN NO. 557.

APPROVED 24 Aug 45 REVISED (1) 17 Nov 54 (2) 17 May 56

PROCUREMENT SPECIFICATION	AIR FORCE-NAVY AERONAUTICAL STANDARD	AN3314
MIL-R-6106	RELAY, 10 AMP 1 PDT, UNSEALED, CLASS 0	

NOTICE When Government drawings, specifications, or other data are used for any purpose other than in connection with a definitely related Government procurement operation, the United States Government thereby incurs no responsibility nor any obligation whatsoever; and the fact that the Government may have formulated, furnished, or in any way supplied the said drawings, specifications, or other data is not to be regarded by implication or otherwise as in any manner licensing the holder or any other person or corporation, or conveying any rights or permission to manufacture, use, or sell any patented invention that may in any way be related thereto.

NOTE: This drawing was approved by joint action of the Air Force and Navy Departments as the Air Force-Navy standard for this product. This drawing supersedes all conflicting standard drawings for like items and shall become effective for the procurement of commercial supplies, or for use in new designs, not later than 6 months after the latest date of approval shown.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T14:20Z
Check the source to verify that this is the current version before use.