FED. SUP CLASS
2920

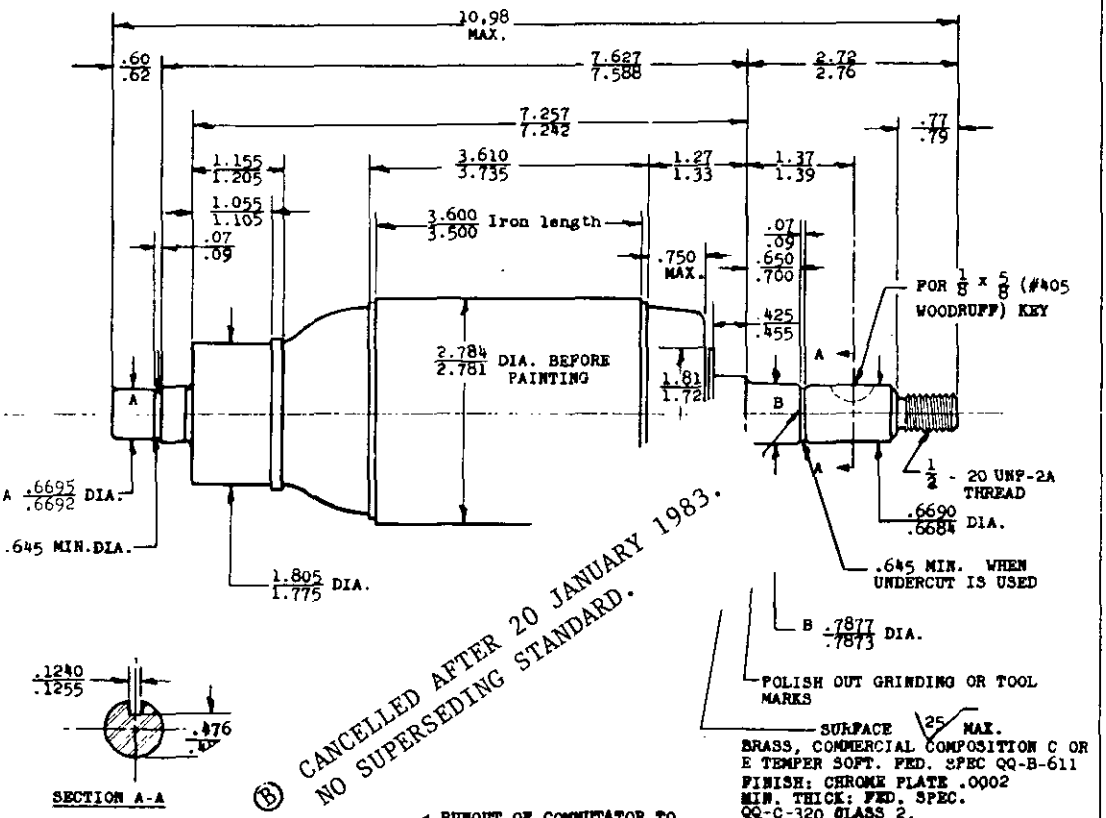

(B) CANCELLED AFTER 20 JANUARY 1983. NO SUPERSEDING STANDARD.

BRASS, COMMERCIAL COMPOSITION C OR E TEMPER SOFT. FED. SPEC QQ-B-611
FINISH: CHROME PLATE .0002 MIN. THICK: FED. SPEC. QQ-C-320 CLASS 2.

RUNOUT OF COMMUTATOR TO .002 T.I.R. WITH REFERENCE TO DATUM DIAMETERS A & B.

BALANCE WITHIN .250 INCH OUNCE

NOTES:

1. SHAFT MATERIAL: STEEL, F. S. 8640 OR F S 8645 PER SPEC. QQ-S-624
2. HEAT TREAT F S 8640 TO ROCKWELL- C30-35
3. HEAT TREAT F S 8645 TO ROCKWELL -C35-40
4. MODIFICATIONS IN OUTSIDE APPEARANCE AND CONSTRUCTION ARE ACCEPTABLE IF UNIT INTERCHANGEABILITY IS NOT AFFECTED.
5. (A) REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATIONS FOR BID.
6. (A) FOR DESIGN FEATURE PURPOSES, THIS STANDARD TAKES PRECEDENCE OVER PROCUREMENT DOCUMENTS REFERENCED HEREIN.

(A) FIIN

MS PART NO. 13822-1

REVIEW INTEREST: NAVY - YD MC ARMY - MO DSA - CS

APPROVED 29 NOVEMBER 1956 REVISED (A) 29 JUNE 1965 (B) 20 January 1983

This Military Standard has been approved by the Department of Defense and is mandatory for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document.

P.A. ARMY- MO ERDL Other Cust N YD	TITLE (A) ARMATURE, GENERATOR (ENGINE ACCESSORY, 28 VOLT, 18-AMP)	MILITARY STANDARD MS 13822
PROCUREMENT SPECIFICATION MIL-G-12604	SUPERSEDES:	SHEET 1 OF 1

DD FORM SEP 67 672-1 (Coordinated) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE.

☆ U.S. GOVERNMENT PRINTING OFFICE: 1983—605-034-1039

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T13:29Z
Check the source to verify that this is the current version before use.