This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document.

Reviewer activities:
Army -
Navy - EC
Air Force - 11, 15, 17, 80
DSA - ES

User activities:
Army -
Navy -
Air Force -

DD FORM 672 (Coordinated) 10 APR 64 — PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

PA AF-85

Other Cust ARMY-EL NAVY-AS

Procurement Specification MIL-C-38999

International interest

SUPERSEDES

TITLE CONNECTOR, PLUG, ELECTRIC, STRAIGHT, CRIMP TYPE, BAYONET COUPLING, SERIES II

MILITARY STANDARD


MS27480

SHEET 1 OF 2

5935-1979-2

FED SUP CLASS 5935

(F) FOR CHANGES SEE SHEET 1

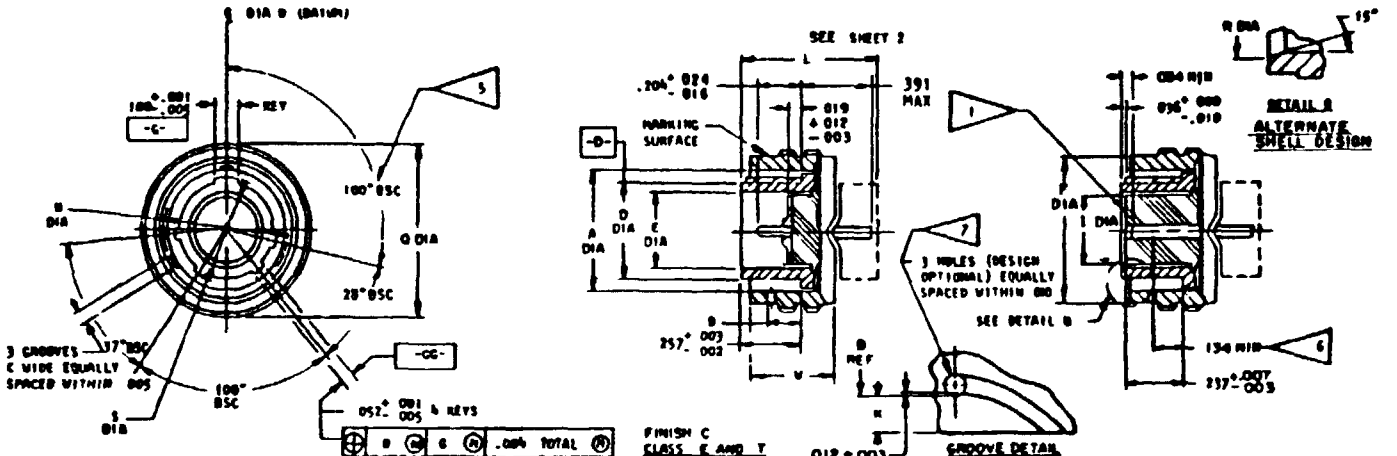

SHELL SIZE	A +.005 -.001 DIA	B ± .020	C +.015 -.001	D +.001 -.005 DIA	E MIN DIA	F +.000 -.006 DIA	K MAX REF	M +.010 -.006 DIA	Q MAX DIA	R +.005 -.006 DIA	S +.001 -.010 DIA	W ±.015	FOR INSERT ARR. SEE DWG NO.	Z MAX DIA
8	.481			.357	.306	.830		.576	.750	.316	.481		27343, 27516	.280
10	.602			.485	.423	.752		.697	.859	.436	.530		27344, 27517	.410
12	.726	.098	.090	.597	.537	.925	.155	.821	1.031	.549	.675	.547	27345, 27518	.532
14	.845			.719	.662	1.050		.935	1.156	.675	.804		27346, 27519	.657
16	1.010			.857	.787	1.172		1.120	1.281	.799	.929		27347, 27520	.782
18	1.136			.967	.896	1.504		1.246	1.406	.891	1.029		27348, 27521	.871
20	1.260	.123	.137	1.072	1.001	1.455	.109	1.370	1.531	1.018	1.154	.574	27349, 27522	.986
22	1.385			1.197	1.126	1.560		1.495	1.641	1.143	1.279		27350, 27523	1.121
24	1.510			1.322	1.251	1.688		1.624	1.766	1.268	1.404	.575	27351, 27524	1.246

(F)

NOTES:
1. INSERT FRONT SURFACE SHALL BE FLAT WITHIN .005 T.I.R.
2. DIAMETER B WITH RESPECT TO DIAMETER S SHALL BE CONCENTRIC AT MMC
3. DIAMETER A AND B SHALL BE CONCENTRIC WITHIN .000 T.I.R.
4. DIMENSIONS IN INCHES.
5. NORMAL KEYWAY POSITION. FOR OTHER KEYWAY POSITIONS SEE (F) PROCUREMENT SPECIFICATION
6. THE POINT AT WHICH A CAGE PIN, HAVING THE SAME BASIC DIAMETER AS THE MATING CONTACT AND A SQUARE FACE, TOUCHES SOCKET CONTACT SPRING.
7. HOLES SHALL BE PROVIDED FOR VISUAL INSPECTION OF LOCK WHEN MATED WITH RECEPTACLE.

EXAMPLE OF PART NUMBER MS27480 T 24 C 6J P A

MS NO | CLASS | SHELL SIZE | FINISH (COLOR) | INSERT ARR. NUMBER | STYLE (P OR S) | POLARIZATION NO LETTER REQUIRED FOR NORMAL

INACTIVE FOR NEW DESIGN AFTER 13 AUG 74
USE MS27473

THIS STANDARD TAKES PRECEDENCE OVER DOCUMENTS REFERENCED HEREIN. REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATIONS FOR BID.

APPROVED 8-SEPT-66 REVISED (E) 13 AUG 1974 (F) 16 JAN 1975

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T16:41Z
Check the source to verify that this is the current version before use.

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document.

DD FORM 10 APR 64 672 (Coordinated) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

P A AF-85

Other Cust ARMY-EL NAVY-AS

International Interest

Procurement Specification MIL-C-38999

SUPERSEDES


TITLE CONNECTOR, PLUG, ELECTRIC, STRAIGHT, CRIMP TYPE, BAYONET COUPLING, SERIES II

MILITARY STANDARD

MS27480

SHEET 2 OF 2

FED SUP CLASS 5935

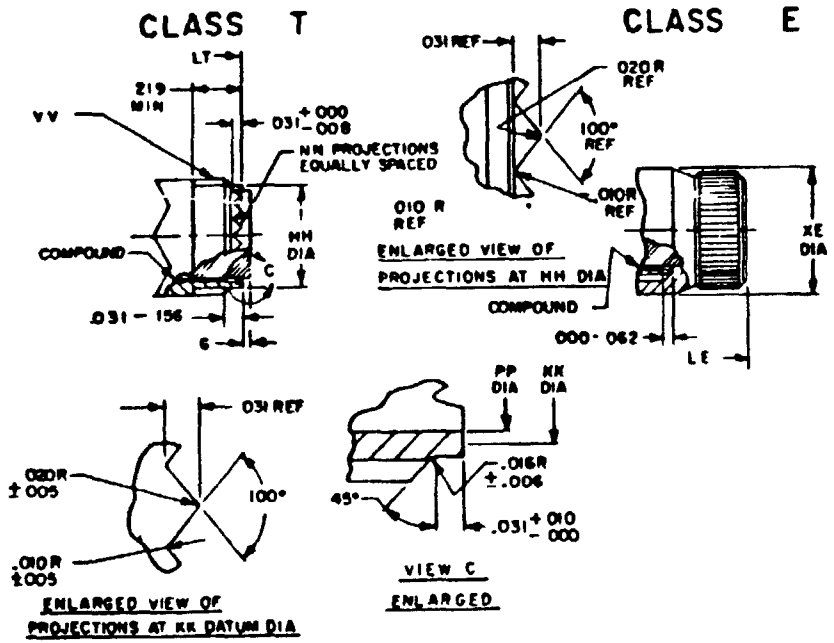

SHELL SIZE	G INSERT PROJECTION CLASS T	HH DIA +.000 -.005	KK DATUM DIA	NN	PP DIA ±.003	LE MAX OVER-ALL LENGTH	LT MAX OVER-ALL LENGTH	XE MAX DIA	VV THREAD UNEF-2A MOD (PLATED)	
									SIZE	MAJOR DIA MOD
8	120 ± .030	.387	.366	12	.344	.953	.766	.594	7/16 - 28	.421 - .417
10		.515	.487	16	.472			.719	9/16 - 24	.542 - .538
12		.628	.609	20	.586			.844	11/16 - 24	.667 - .663
14		.754	.731	24	.711			.969	13/16 - 20	.791 - .787
16		.879	.853	28	.836			1.094	15/16 - 20	.916 - .912
18		.985	.974	32	.942			1.219	1 1/16 - 18	1.034 - 1.030
20		1.110	1.097	36	1.067			1.344	1 3/16 - 18	1.158 - 1.154
22		1.235	1.218	40	1.192			1.469	1 5/16 - 18	1.283 - 1.279
24	.090 ± .050	1.360	1.340	44	1.317		.844	1.594	1 7/16 - 18	1.408 - 1.404

APPROVED 8 - SEPT - 66 (F) FOR CHANGES SEE SHEET 1

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T16:41Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

OMB Approval
No 22-R255

INSTRUCTIONS The purpose of this form is to solicit beneficial comments which will help achieve procurement of suitable products at reasonable cost and minimum delay, or will otherwise enhance use of the document. DoD contractors, government activities, or manufacturers/vendors who are prospective suppliers of the product are invited to submit comments to the government. Fold on lines on reverse side, staple in corner, and send to preparing activity. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements. Attach any pertinent data which may be of use in improving this document. If there are additional papers, attach to form and place both in an envelope addressed to preparing activity.

DOCUMENT IDENTIFIER AND TITLE

MS27480F Connector, Plug, Electric, Straight, Crimp Type, Bayonet Coupling

NAME OF ORGANIZATION AND ADDRESS	CONTRACT NUMBER
	MATERIAL PROCURED UNDER A ☐ DIRECT GOVERNMENT CONTRACT ☐ SUBCONTRACT

1. HAS ANY PART OF THE DOCUMENT CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE?

   A. GIVE PARAGRAPH NUMBER AND WORDING

   B. RECOMMENDATIONS FOR CORRECTING THE DEFICIENCIES

2. COMMENTS ON ANY DOCUMENT REQUIREMENT CONSIDERED TOO RIGID

3. IS THE DOCUMENT RESTRICTIVE?

   ☐ YES ☐ NO *(If "Yes", in what way?)*

4. REMARKS

SUBMITTED BY *(Printed or typed name and address - Optional)*	TELEPHONE NO
	DATE

DD FORM 1 JAN 72 1426 REPLACES EDITION OF 1 JAN 66 WHICH MAY BE USED

C 1 6 0 6 1

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T16:41Z
Check the source to verify that this is the current version before use.

FOLD

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

POSTAGE AND FEES PAID
DEPARTMENT OF THE AIR FORCE
DoD-318

U.S. MAIL

AFLC/MMGE/Standardization
Wright-Patterson AFB OH 45433

FOLD

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T16:41Z
Check the source to verify that this is the current version before use.