FED SUP CLASS
5305

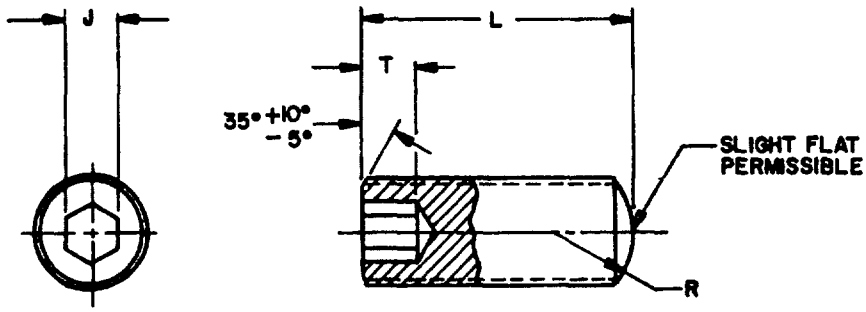

TABLE I DIMENSIONS AND PART NUMBERS.

NOMINAL SIZE		.250	.3125	.375	500
THREADS PER INCH UNC - 3A		20	18	16	13
J - SOCKET WIDTH ACROSS FLATS	NOM	125	156	.188	.250
R - POINT RADIUS	MAX	.219	265	312	.406
	MIN	.188	.234	.281	.375
T - KEY ENGAGEMENT	MIN	.125	156	188	.250
L - LENGTH	TOLERANCE	DASH NO	DASH NO	DASH NO	DASH NO
1.000	±.020	1	2	3	4

REQUIREMENTS

1 MATERIAL ALLOY STEEL IN ACCORDANCE WITH PROCUREMENT SPECIFICATION.

2 FINISH ZINC COATING, IN ACCORDANCE WITH ASTM B633-78, Fe/Zn_5 (5 µm), TYPE II

3 HARDNESS. 45-53HRC

4 THREADS THE THREADS SHALL BE IN ACCORDANCE WITH FED-STD-H28/2 ACCEPTABILITY OF SCREW THREADS SHALL BE IN ACCORDANCE WITH FED-STD-H28/20, SYSTEM 21.

5. PART NUMBERS THE BASIC MS PART NUMBER IS FOLLOWED BY A DASH NUMBER FROM TABLE I

EXAMPLE MS51489-1 - SETSCREW, HEXAGON SOCKET, OVAL POINT, ALLOY STEEL, 250-20UNC-3A, LENGTH 1.000, ZINC COATED

NOTES

1 ALL DIMENSIONS ARE IN INCHES

2 REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATIONS FOR BIDS OR REQUEST FOR PROPOSALS, EXCEPT THAT REFERENCED ADOPTED INDUSTRY DOCUMENTS SHALL GIVE THE DATE OF THE ISSUE ADOPTED

3 FOR DESIGN FEATURE PURPOSES, THIS STANDARD TAKES PRECEDENCE OVER PROCUREMENT DOCUMENTS REFERENCED HEREIN

APPROVED 1 AUG 84 REVISED

USER ACTIVITIES
ARMY-ME, MI
NAVY-MC, OS

REVIEWER ACTIVITIES
ARMY-AV, EA
AIR FORCE-82
DLA-IS
NSA-NS

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document when applicable

PA	AR	INTERNATIONAL INTEREST	TITLE	MILITARY STANDARD
Other Cust	SH 99		SETSCREW, HEXAGON SOCKET, OVAL POINT, ALLOY STEEL	MS51489
PROCUREMENT SPECIFICATION FF-S-200		SUPERSEDES		PAGE 1 OF 1

DD FORM 672-1 (COORDINATED) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE 5305-1482

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T18:03Z
Check the source to verify that this is the current version before use.