
NOTICE: When Government drawings, specifications, or other data are used for any purpose other than in connection with a definitely related Government procurement operation, the United States Government thereby incurs no responsibility, nor any obligation whatsoever; and the fact that the Government may have formulated, furnished, or in any way supplied the said drawings, specifications, or other data is not to be regarded by implication or otherwise as in any manner licensing the holder or any other person or corporation, or conveying any rights or permission to manufacture, use, or sell any patented invention that may in any way be related thereto.

NOTE: This drawing was approved by joint action of the War and Navy Departments as the Army-Navy standard for this product. This drawing supersedes all interdepartmental standards for the same product and shall be used for the procurement of aeronautical supplies, or for use in new designs, not later than six months after the latest date of approval shown. It may be put into effect, however, at an earlier date after promulgation.

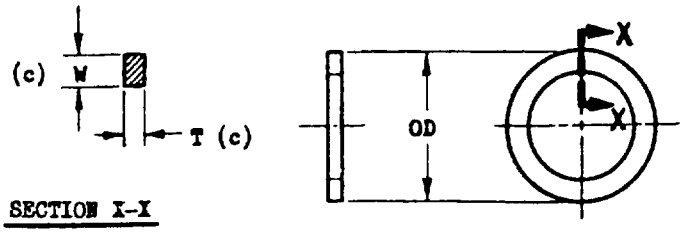

SECTION X-X

(a) DASH NO.	ACTUAL SIZE OD ±1/64	W +.010 -.005	(b) T ±.010
1	1-7/8	.123	.062
2	2	.123	.062
3	2-1/8	.123	.062
4	2-1/4	.123	.062
5	2-3/8	.123	.062
6	2-1/2	.123	.062
7	2-5/8	.123	.062
8	2-3/4	.123	.062
9	2-7/8	.123	.062
10	3	.123	.062
11	3-1/8	.123	.062
12	3-1/4	.123	.062
13	3-3/8	.123	.062
14	3-1/2	.123	.062
15	3-5/8	.123	.062
16	3-3/4	.123	.062
17	3-7/8	.123	.062
18	4	.123	.062
19	4-1/8	.123	.062
20	4-1/4	.123	.062
21	4-3/8	.123	.062
22	4-1/2	.123	.062
23	4-5/8	.123	.062
24	4-3/4	.123	.062
25	4-7/8	.123	.062

(a) DASH NO.	ACTUAL SIZE OD ±1/64	W +.010 -.005	(b) T ±.010
26	5-	.123	.062
27	5-1/8	.123	.062
28	5-1/4	.123	.062
29	5-3/8	.123	.062
30	5-1/2	.123	.062
31	5-5/8	.123	.062
32	5-3/4	.123	.062
33	5-7/8	.123	.062
34	6	.123	.062
35	6-1/8	.123	.062
36	6-1/4	.123	.062
37	6-1/2	.123	.062
38	6-3/4	.123	.062
39	7	.123	.062
40	7-1/4	.123	.062
41	7-1/2	.123	.062
42	7-3/4	.123	.062
43	8	.123	.062
44	8-1/4	.123	.062
45	8-1/2	.123	.062
46	8-3/4	.123	.062
47	9	.123	.062
48	9-1/4	.123	.062
49	9-1/2	.123	.062
50	9-3/4	.123	.062
51	10	.123	.062
52	10-1/4	.123	.062

(a) DASH NUMBERS CORRESPOND WITH AN6230.
(b) THICKNESS SHALL NOT VARY MORE THAN .010 BETWEEN ANY TWO POINTS ON A RING.
(c) EDGES SHALL BE CUT CLEAN AND SQUARE TO WITHIN 5°.

PARTS -26 THRU -52 MARKED X INACTIVE FOR NEW DESIGN (30 Oct 45)

MATERIAL: (FOR DETAILS SEE PROCUREMENT SPECIFICATION).

EXAMPLE OF PART NO: AN6244-10 = BACK-UP RING 3 INCHES OD.

DIMENSIONS IN INCHES.

APPROVED 30 Oct 45 REVISED

PROCUREMENT SPECIFICATION	ARMY-NAVY AERONAUTICAL STANDARD	AN6244
AN-R-22	RING - HYDRAULIC GASKET BACK-UP	

GPO 917885

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T14:22Z
Check the source to verify that this is the current version before use.