MIL-S-52821A(ME)
27 February 1980
SUPERSEDING
MIL-S-52821(ME)
2 July 1974

MILITARY SPECIFICATION

STENCIL SET, MARKING: MANILA BOUND: CONSISTING OF LETTERS, NUMBERS AND TRAFFIC SIGNS

This specification is approved for use by the Mobility Equipment Research and Development Command, Department of the Army, and is available for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 Scope. This specification covers a set of paper stencils of letters, numbers, and traffic signs bound in book form.

2. APPLICABLE DOCUMENTS

2.1 Issues of documents. The following documents of the issue in effect on date of invitation for bids or request for proposal form a part of this specification to the extent specified herein.

SPECIFICATIONS

FEDERAL

UU-S-625	- Stencilboard.
PPP-B-601	- Boxes, Wood, Cleated-Plywood.
PPP-B-621	- Boxes, Wood, Nailed and Lock-Corner.
PPP-B-636	- Boxes, Shipping, Fiberboard

☆U.S. GOVERNMENT PRINTING OFFICE: 1980—603-121/1247 FSC 7520

Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be addressed to: US Army Mobility Equipment Research and Development Command, ATTN: DRDME-DS, Fort Belvoir, VA 22060 by using the self-addressed Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T21:34Z
Check the source to verify that this is the current version before use.

MILITARY

MIL-P-43331	- Paper, Manila.
MIL-S-52804	- Stencil Set, Marking: Stencil Board; Nonadjustable.

STANDARDS

MILITARY

MIL-STD-105	- Sampling Procedures and Tables for Inspection by Attributes.
MIL-STD-129	- Marking for Shipment and Storage.
MIL-STD-130	- Identification Marking of US Military Property.
MIL-STD-1188	- Commercial Packaging of Supplies and Equipment.

(Copies of specifications and standards required by contractors in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

3. REQUIREMENTS

3.1 Description. The stencil set shall consist of 4 sets of 36 letters and numbers, 8 sheets of stencil paper, and 8 sets of traffic signs. Each sheet shall be separated from the next sheet by a separator sheet. Index tabs shall be provided on the separator sheets to indicate the following stencil. The entire set of stencil letters and numbers, stencil sheets, traffic sign stencils, and separator sheets shall be bound in book form. The cover and back shall be of manila paper conforming to MIL-P-43331, Type I. The overall size of the set shall be not less than 18.25 by 21 inches.

3.2 Material. Material shall be as specified herein. Materials not specified shall be selected by the contractor and shall be subject to all provisions of this specification (see 6.3).

3.3 Stencils. Stencils and blank stencil sheets shall be on stencilboard conforming to UU-S-625, Type II, grade optional. The basic weight of the paper shall be between 35 and 41 pounds per 1000 sheets measuring 17 by 22 inches. Stencil sheets shall be 18.25 by 18.25 inches (exclusive of binding). Each sheet shall be perforated near the bound edge to permit easy removal of the sheet. Loose parts, such as the

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T21:34Z
Check the source to verify that this is the current version before use.

centers of the letters "A", "B", "D", "O", border lines, and other fragile parts shall be secured to the body of the stencil by ties in printing position. Not less than two ties, one at the top and one at the bottom, shall be used to hold the center portion of the letter, number, or traffic sign. The width of each tie shall not exceed one third of the stroke width of the letter or the number.

3.4 Letters and numbers. Individual letters and numbers shall be in accordance with MIL-S-52804, 5-inch size. Four letters or numbers shall be placed on one sheet and shall be separated into 7-inch squares by perforations. Perforations shall allow positive detachment without tearing into the body of the stencil.

3.5 Traffic signs. Traffic signs, Stencil Numbers 1 through 19, shall be as shown on Figures 1, 2, and 3. Each sign shall occupy the full size of the sheet. All parts of the stencil shown in black on the figures, except the ties, shall be cut out. Lettering on the signs shall conform to MIL-S-52804. Sizes of letters used on the various signs shall be as follows:

Letter size	Stencil number
3-inch	7, 8, 10, 11, 12, 14, 15, 16 17, 18
4-inch	1, 9, 12, 13, 18
5-inch	4, 6
6-inch	5

Letter spacing shall be not less than the width of a stroke or greater than twice the stroke width.

3.5.1 Lettering arrangement. On Stencils, 1, 4, 5, and 6, the letters shall be centered diagonally so that there is an equal space at top and bottom of each sign. On Stencils 7, 10, and 11, the letters shall be arranged in 2 lines with remaining vertical space inside the border line distributed to 3 equal spaces. On Stencil 7, the letter "N" in "TON" shall be directly below the letter "E" in "BRIDGE" to permit placing a number before "TON". On Stencil 8, the letters shall be arranged to provide not less than 11.25 inches of space below the word "SPEED". On Stencil 9, the words shall be separated to permit placing the arrow shown on Stencil 19. On Stencils 13, 14, 15, 16, and 17, the letters shall be arranged so that the spacing below will permit placing the arrow shown on Stencil 19. On Stencils 12 and 18, the two

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T21:34Z
Check the source to verify that this is the current version before use.

lines of letters shall be separated by a dash, 0.50 inch by 8 inches, so that the space above will permit placing of a 5-inch character by the operator. On Stencil 19, the arrow shall be centered on the stencil paper without a border line. All other signs, except numbers 1 and 5, shall have a 0.25-inch cutout border (except the ties) with the inside area of the stencil 16 inches square. On Stencil 1 for "STOP", the corners of the square shall be cut out to form an octagon, with a 0.25-inch cutout border line and a 0.25-inch border as shown. On the No. 5 Stencil for "RR", the corners shall be cut out to form a circle with a 0.25-inch border line and a 0.25-inch margin as shown.

3.6 Identification marking. Each stencil set shall be identified in accordance with MIL-STD-130, the marking to be printed in one corner of the cover. The words "STENCIL SET" shall be printed on the center of the cover in large block letters.

3.7 Workmanship. The stencils shall be clean. Cutouts shall be sharp with no ragged edges or tears, and corners shall be square. Perforations shall be spaced to permit easy separation without tearing.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. Unless otherwise specified in the contract, the contractor is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified in the contract, the contractor may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure supplies and services conform to prescribed requirements.

4.1.1 Material inspection. The contractor is responsible for insuring that materials used are manufactured, examined, and tested in accordance with referenced specifications and standards, as applicable.

4.2 Classification of inspections. The inspection requirements specified herein are classified as follows:

(a) Quality conformance inspection (see 4.3).
(b) Inspection of packaging (see 4.5).

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T21:34Z
Check the source to verify that this is the current version before use.

4.3 Quality conformance inspection.

4.3.1 Sampling. Sampling for examination shall be in accordance with MIL-STD-105.

4.3.2 Examination. Samples selected in accordance with 4.3.1 shall be examined for the defects specified in 4.4.1. AQL shall be 2.5 percent defective.

4.4 Inspection procedure.

4.4.1 Examination. The stencil set shall be examined as specified herein for the following defects:

101. Stencil set not bound in book form as specified.
102. Size of stencil set not as specified.
103. Separator sheets not as specified.
104. Letters and numbers not 4 to each sheet; not separated by perforations.
105. Letters and numbers not of the size specified.
106. Traffic signs not as specified.
107. Quantities not as specified.
108. Identification marking missing, incomplete, or illegible.
109. Workmanship not as specified.

4.5 Inspection of packaging.

4.5.1 Quality conformance inspection of pack.

4.5.1.1 Unit of product. For the purpose of inspection, a completed pack prepared for shipment shall be considered a unit of product.

4.5.1.2 Sampling. Sampling for examination shall be in accordance with MIL-STD-105.

4.5.1.3 Examination. Samples selected in accordance with 4.5.1.2 shall be examined for the following defects. AQL shall be 2.5 percent defective.

110. Containers not as specified.
111. Fiberboard boxes not closed as specified.
112. Marking illegible, incorrect, incomplete, or missing.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T21:34Z
Check the source to verify that this is the current version before use.

5. PACKAGING

5.1 Preservation. Preservation shall be Level A or Commercial as specified (see 6.2).

5.1.1 Level A. Each stencil set shall be placed in a fiberboard box conforming to PPP-B-636, W6c. The box shall be closed by Method V of the box specification appendix.

5.1.2 Commercial. Commercial preservation shall be in accordance with MIL-STD-1188.

5.2 Packing. Packing shall be Level A, Level B, or Commercial as specified (see 6.2).

5.2.1 Level A. The sets, preserved as specified in 5.1, shall be packed in boxes conforming to PPP-B-601, Overseas Type, Grade B or PPP-B-621, Class 2. The weight of each box with contents shall not exceed 200 pounds.

5.2.2 Level B. The sets, preserved as specified in 5.1, shall be packed as specified in 5.2.1 for Level A except the boxes shall be Domestic Type, or the sets shall be packed in fiberboard boxes conforming to PPP-B-636, V3c, or equivalent. Fiberboard boxes shall be closed by Method V in accordance with box specification appendix.

5.2.3 Commercial. Commercial packing shall be in accordance with MIL-STD-1188.

5.3 Marking. Marking of packages and shipping containers shall be in accordance with MIL-STD-129 for military protection. Commercial marking shall be in accordance with MIL-STD-1188.

6. NOTES

6.1 Intended use. The stencil set is intended to be used with the silk screen printing frame to print road signs, and for storing stencils. This set is listed in Supply Catalog 3610-97-CL-E06.

6.2 Ordering data. Procurement documents should specify the following:

(a) Title, number, and date of this specification.
(b) Degree of preservation, and degree of packing required (see 5.1 and 5.2).

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T21:34Z
Check the source to verify that this is the current version before use.


6.3 Recycled material. It is encouraged that recycled material be used, when practical, as long as it meets the requirements of this specification (see 3.2).

Custodian:
Army - ME


Preparing activity:
Army - ME

Project 7520-A173


Source: https://assist.dla.mil -- Downloaded: 2026-10-22T21:34Z
Check the source to verify that this is the current version before use.

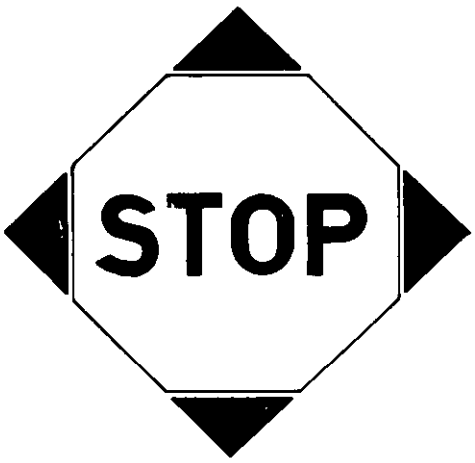

1. STOP

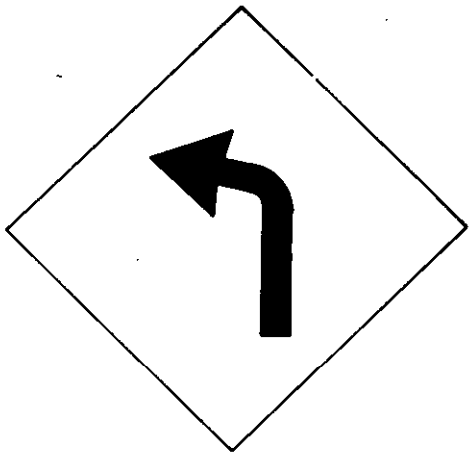

2. LEFT CURVE

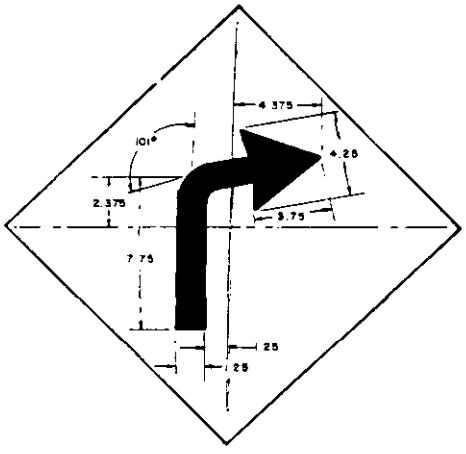


3. RIGHT CURVE



4. HILL



5. RAILROAD CROSSING

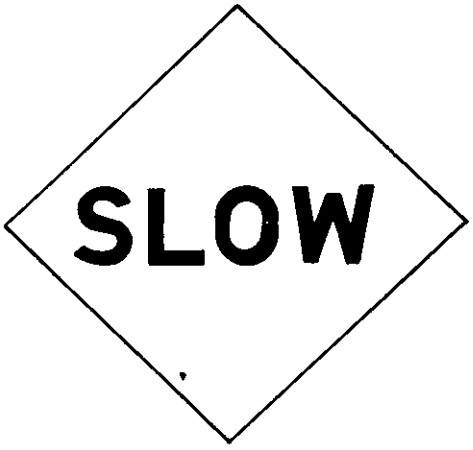

6. SLOW


FIGURE 1. Traffic signs.

X-2852

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T21:34Z
Check the source to verify that this is the current version before use.



7 BRIDGE



8. SPEED




9. ONE WAY



10. NO PARKING



11. ROAD CLOSED

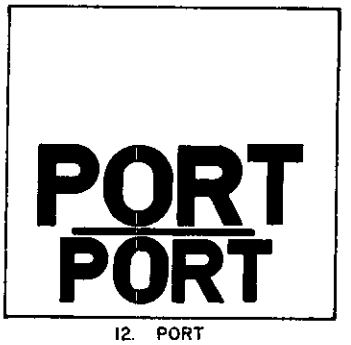


12. PORT

FIGURE 2. Traffic signs.

X-2853


Source: https://assist.dla.mil -- Downloaded: 2026-10-22T21:34Z
Check the source to verify that this is the current version before use.



13. GAS D P




14. RAIL ROAD




15. WATER POINT




16. RATION DUMP



17. DETOUR



18. DUMP DEPOT



19. ARROW

FIGURE 3. Traffic signs.

X-2854

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T21:34Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

INSTRUCTIONS: This form is provided to solicit beneficial comments which may improve this document and enhance its use. DoD contractors, government activities, manufacturers, vendors, or other prospective users of the document are invited to submit comments to the government. Fold on lines on reverse side, staple in corner, and send to preparing activity. Attach any pertinent data which may be of use in improving this document. If there are additional papers, attach to form and place both in an envelope addressed to preparing activity. A response will be provided to the submitter, when name and address is provided, within 30 days indicating that the 1426 was received and when any appropriate action on it will be completed.

NOTE: This form shall not be used to submit requests for waivers, deviations or clarification of specification requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements.

DOCUMENT IDENTIFIER *(Number)* AND TITLE MIL-S-52821A(ME) Stencil Set, Marking: Manial Bound: Consisting of Letters, Numbers and Traffic Signs

NAME OF ORGANIZATION AND ADDRESS OF SUBMITTER

☐ VENDOR ☐ USER ☐ MANUFACTURER

1. ☐ HAS ANY PART OF THE DOCUMENT CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE? ☐ IS ANY PART OF IT TOO RIGID, RESTRICTIVE, LOOSE OR AMBIGUOUS? PLEASE EXPLAIN BELOW.

A. GIVE PARAGRAPH NUMBER AND WORDING

B. RECOMMENDED WORDING CHANGE

C. REASON FOR RECOMMENDED CHANGE(S)

2. REMARKS

SUBMITTED BY *(Printed or typed name and address — Optional)*

TELEPHONE NO.

DATE

DD FORM 1 OCT 76 1426 EDITION OF 1 JAN 72 WILL BE USED UNTIL EXHAUSTED.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T21:34Z
Check the source to verify that this is the current version before use.