A-A-50110
March 31, 1987

COMMERCIAL ITEM DESCRIPTION

RACK, BREAD, BAKER'S: 10-SHELF, KNOCKDOWN TYPE

The General Services Administration has authorized the use of this commercial item description in preference to MIL-R-2345.

1. DESCRIPTION

This commercial item description covers mobile, knockdown type, bread racks having 10 removable shelves and open sides and ends.

2. SALIENT CHARACTERISTICS

2.1 Design and construction. Bread racks shall be fabricated from either stainless steel, aluminum, or carbon steel. The racks shall be dip galvanized to a minimum thickness of 0.0001 inch. The rack shown in figure 1, except for specified dimensions, is for illustrative purposes only and is not intended to exclude racks otherwise meeting all of the requirements of this commercial item description. Rack length, width, height, number of shelves, and clearance between shelves shall be as shown in figure 1. The rack shall be of the knockdown type and shall be furnished with complete instructions for assembly of the components. The rack shall be mounted on four casters. The rack shall be designed to hold a 1000-pound load equally distributed over the ten shelves without any evidence of failure or permanent deformation. The rack shall also be capable of being loaded with 800 pounds (the weight being equally divided and uniformly distributed over the ten shelves) and then rolled over a 1/8-inch obstacle without any damage. If necessary, the racks shall be properly reinforced and casters shall be firmly assembled to a steel plate or plates and welded to the underside of the racks, in order to comply with all the requirements and tests.

2.2 Casters. Casters shall be 5 inches in diameter, swivel, and have a minimum load rating of 375 pounds for each caster. Two of the four casters shall be provided with locking brakes.

2.3 Shelves. The shelves shall consist of a frame and supporting wires. The supporting wires shall be spaced 1 inch ± 1/4-inch on centers, and shall be welded or otherwise securely fastened to the frame. Shelves shall not be less that 27-3/4 inches wide or less than 65-3/4 inches long. Shelves shall not protrude beyond the rack frames.

FSC 7320

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 202610-26T08:39Z
Check the source to verify that this is the current version before use.

2.4 Handles. The handles shall be "U" shaped, not less than 5 inches in height and 2-1/2 inches in width, and shall be fastened to each of the corner uprights between the fifth and sixth shelves as shown in figure 1, or the handles may consist of a rod connecting the two uprights along the 29 inch dimension on both ends.

2.5 Sanitation. Racks shall comply with the sanitation requirements of the Baking Industry Sanitation Standards Committee Standard No. 24.

2.6 Data name plate (Government unique requirement see 5.4). The rack shall be furnished with a data name plate in accordance with the applicable requirements of MIL-STD-130 except the requirements for: (a) Methods of applying, (b) Identification tags, (c) Information not required, and (d) Optional marking information shall not apply. The data name plate shall be made of minimum 20-gauge corrosion-resisting metal and attached to the rack by rivets, screws, or welding in such a manner as to meet the applicable National Sanitation Foundation (NSF) sanitary requirements for this equipment. The plate shall bear the following information which shall be stamped, engraved, or applied by photosensitive means:

National Stock Number
Procurement Instrument Identification Number
Specification Data
Manufacturer's Name, Address, and Telephone Number
Supplier's Name, Address, and Telephone Number (List only if different from Manufacturer)
Manufacturer's Model Number
Government Approved Manual Number (see 5.2)

Each plate shall be placed so that it is readily visible to the operator during normal operating use and so as to not adversely affect the life and utility of the rack.

2.7 Assembly hardware. Each rack shall be furnished with nuts, bolts, washers, etc. of the type, size, and quantities required to assemble the rack.

2.8 Workmanship. The finished rack shall be complete, clean, and free of burrs, scratches, breaks, sharp edges, sharp corners, and slivers. Rivets, where used, shall be tight and properly peened and in full contact with the metal surfaces. Riveting shall be accomplished prior to galvanizing. Welding shall be continuous and sound, and free of slag, pits, buildup and undercuts. All flux shall be removed and welds shall be ground smooth. All welding shall be accomplished prior to galvanizing. The galvanized finish shall be clean, smooth, uniform, adherent and free of smudges, smears, runs, blisters, flakes, peeling, rust, and areas of no coverage.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:39Z
Check the source to verify that this is the current version before use.

3. QUALITY ASSURANCE

3.1 Certification. The contractor shall certify that the product offered meets the salient characteristics of this description, conforms to the producer's own drawings, specifications, standards, and quality assurance practices, and is the same as the product offered for sale in the commercial marketplace, except for those additional requirements/characteristics specified herein. The Government reserves the right to require proof of such conformance prior to first delivery and thereafter as may be otherwise provided for under provisions of the contract.

4. PACKAGING

4.1 Packaging & packing. Packaging and packing shall be commercial or export as specified (see 5.2).

4.2 Commercial. Each rack shall be cleaned, preserved, packaged, packed, and unitized in accordance with ASTM D 3951.

4.3 Export packaging. Each rack shall be cleaned, preserved, and cushioned to protect against corrosion, deterioration, and physical damage during shipping and storage. Each rack shall be completely disassembled. Small parts shall be packaged in a fiberboard box conforming to style optional, type CF or SF, class domestic of PPP-B-636.

4.3.1 Export packing. Each rack and its packaged parts, shall be packed in a nailed and lock-corner wood box conforming to class 1, style optional, type 2 load of PPP-B-621, or a cleated-plywood wood box conforming to domestic type, style optional, type 2 load of PPP-B-601.

4.3.2 Palletization. When specified, shipping containers shall be palletized in accordance with MIL-STD-147 (see 5.2).

4.4 Marking (commercial and export). Marking of shipping containers and unit loads shall be in accordance with MIL-STD-129 or ASTM D 3951, as applicable.

5. NOTES

5.1 Intended use. The bread rack is intended for use in bakeries and pastry kitchens for moving, proofing, cooling, or storage of bread and pastries.

5.2 Ordering data. Acquisition documents should specify the following:

a. Title, number, and date of this document.
b. Government approved manual number to be included on data name plate (see 2.6).
c. Selection of applicable packaging and packing required (see 4.1).
d. When palletization is required (see 4.3.2).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:39Z
Check the source to verify that this is the current version before use.

5.3 Sources of documents.

5.3.1 Sources for nongovernment association documents.

BISSC Standard No. 24 for Racks, Pan Trucks and Dollies, is available from:

Baking Industry Sanitation Standards Committee (BISSC)
111 E. Wacker Drive, Suite 600
Chicago, IL 60601.

ASTM D 3951 - Standard Practice for Commercial Packaging, is available from:

The American Society for Testing and Materials (ASTM)
1916 Race Street
Philadelphia, PA 19103.

5.3.2 Sources of governmental documents.

Military documents are available from:

Naval Publications and Forms Center
5801 Tabor Avenue
Philadelphia, PA 19120

5.4 Government unique requirements. Whenever "(Government unique requirements)" is included in the title of a paragraph under "salient characteristics" it is meant that the requirement is something that is not normally offered to the commercial marketplace by the manufacturer.

MILITARY INTERESTS:

Custodians

Army - GL
Navy - YD
Air Force - 99

Review activities

Army - MD, TS
Navy - MS, SA
Air Force - 84
DLA - GS

CIVIL AGENCY COORDINATING ACTIVITY:


GSA-FSS

PREPARING ACTIVITY:

Army - GL

Project No. 7320-0797

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:39Z
Check the source to verify that this is the current version before use.

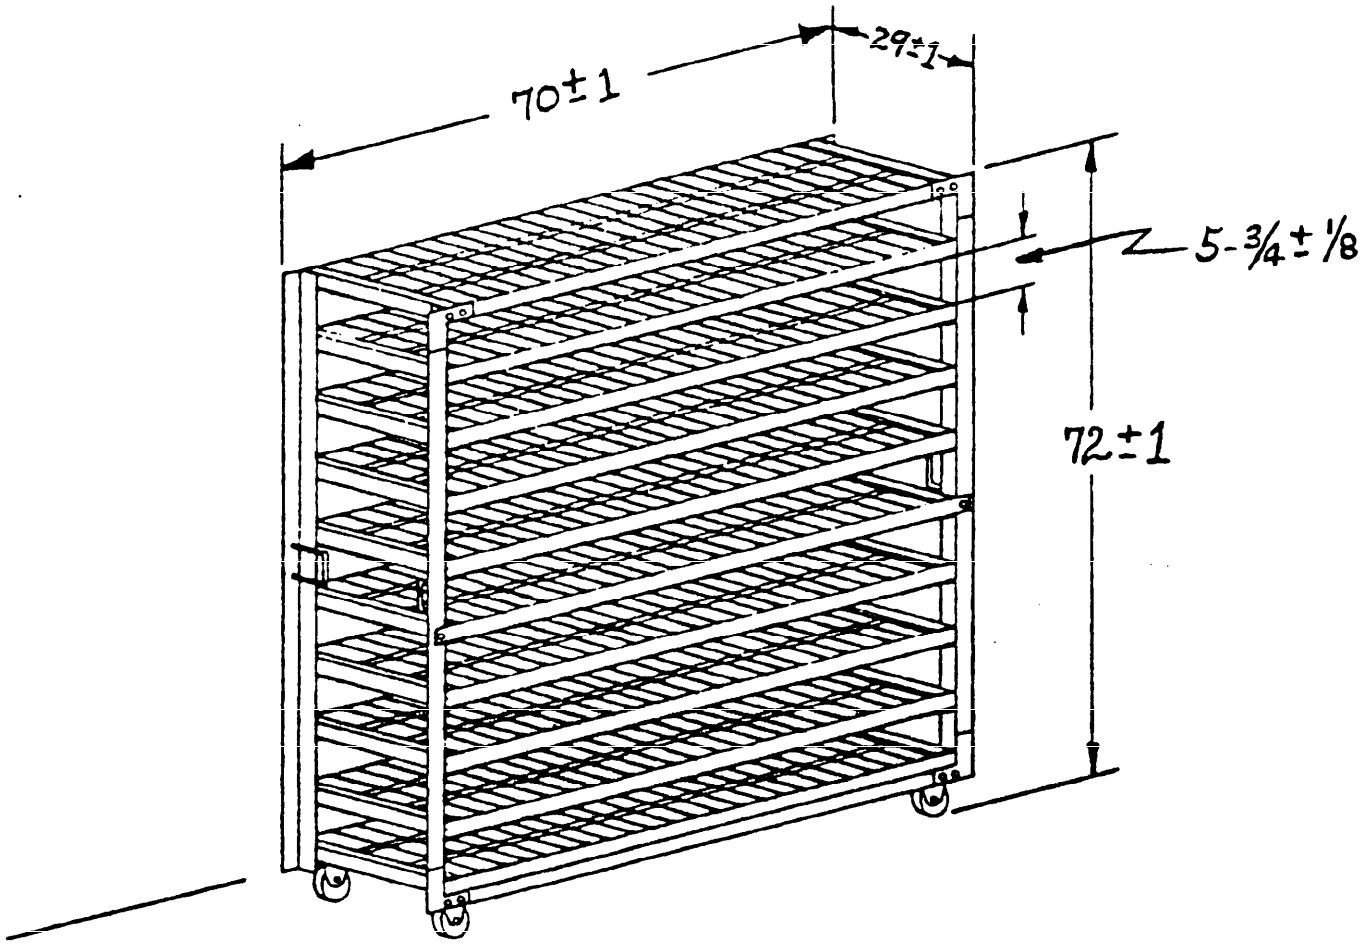

DIMENSIONS IN INCHES

FIGURE 1: RACK, BREAD, BAKER'S: 10 SHELF, KNOCKDOWN TYPE

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:39Z
Check the source to verify that this is the current version before use.