INCH-POUND

A-A-52045
January 7, 1992

COMMERCIAL ITEM DESCRIPTION

TENSION HANDLE, STEEL MEASURING TAPE, SURVEYOR'S

The General Services Administration has authorized the use of this commercial item description in preference to Military specification MIL-T-11752B.

This description covers a spring-scale tension handle for use with a surveyor's measuring tape.

Salient characteristics:

Design: The tension handle shall be as specified herein. The surveyor's steel measuring tape tension handle shall consist of a spring-scale body with a jump ring and snap hook, for attachment to a surveyor's steel measuring tape at one end, a jump ring and tape pull at the other end of the body, and a leather carrying thong. A typical tension handle is shown in figure 1.

Spring-scale body. The spring-scale body shall be graduated for a length of not less than 2 inches in 0.50 pound increments from 0 to 30 pounds.

Accuracy. The spring and pointer assembly shall indicate the applied load to within 0.50 pound in the range between 10 to 30 pounds at +75 °F (24 °C) and to within 1 pound at -25 °F (-32 °C) and at +125 °F (52 °C).

Tape pull. The tape pull shall be readily detachable.

Snap hook. The snap hook shall be of the swivel type and suitable for fastening to the end loop of a surveyor's steel tape.

Leather carrying thong. The leather carrying thong shall be not less than 36 inches long, 0.250-inch wide, and 0.117-inch thick, and shall contain between 0.20 and 0.50 percent paranitrophenol to render the thong fungus resistant.

Beneficial comments, recommendations, additions, deletions, clarifications, etc. and any other data which may improve this document should be sent by letter to: Commander, US Army Belvoir Research, Development, and Engineering Center, ATTN: STRBE-TSE, Fort Belvoir, VA 22060-5606.

AMSC N/A FSC 6675

DISTRIBUTION STATEMENT A. Approved for public release, distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:05Z
Check the source to verify that this is the current version before use.

surfaces previously cleaned and prepared so that the surfaces are free from all

Materials: Material shall be as specified herein.

Body. The body, including the end pieces and pointer assembly, shall be fabricated of corrosion-resistant material.

Rings, snap hook, and tape pull. The rings, snap hook, and tape pull shall be fabricated of corrosion-resistant metal or treated for corrosion resistance by coating or plating.

Spring. The spring shall be of medium- or high-carbon steel.

Identification marking: The tension handle shall be identified with the manufacturer's identification.

Workmanship: The quality of workmanship shall be such as to produce tension handles that are in accordance with the requirements of this description and are so constructed as to insure proper functioning of all parts of the unit.

Certification of commercial item. The contractor shall certify that the product offered to the Government meets the salient characteristics of this description and that the product conforms to the producer's own drawings, specifications, standards, and quality assurance practices and is the same product as the manufacturer's current product offered by the contractor in the commercial marketplace for at least one year preceding the solicitation. The Government reserves the right to require proof of such conformance prior to first delivery and thereafter as may be otherwise provided for under the provisions of the contract.

Metric Products. Products manufactured to metric dimensions will be considered on an equal basis with those manufactured using inch-pound units, provided they fall within the tolerances specified using conversion tables contained in the latest revision of FED-STD-376, and all other requirements of this commercial item description are met.

If a product is manufactured to metric dimensions and those dimensions exceed the tolerances specified in the inch/pound units, a request should be made to the contracting officer to determine if the product is acceptable.

The contracting officer has the option of accepting or rejecting the product.

Quality assurance: The tension handle shall be examined for the following defects. Presence of one or more defects shall be cause for rejection.

1. Graduations not as specified.
2. Accuracy not as specified.
3. Tape pull handle not as specified.
4. Snap hook not as specified.
5. Leather carrying thong not as specified.
6. Dimensions not as specified.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:05Z
Check the source to verify that this is the current version before use.

7. Material not as specified.
8. Identification marking not as specified.
9. Workmanship not as specified.
10. Packaging and marking not as specified.

Regulatory requirements. In accordance with Federal Acquisition Regulation, section 23.403, the Government's policy is to acquire items composed of the highest percentage of recovered materials practicable, consistent with maintaining a satisfactory level of compeition without adversely affecting performance requirements or exposing the supplier's employees to undue hazards from the recovered materials.

Preservation, packaging, packing, labeling, and marking. The preservation, packaging, packing, labeling, and marking shall be as specified in the contract or order.

CID based part identification numbers. The following part identification numbering procedure is for Government purposes and does not constitute a requirement for the contractor.

Part or identifying number (PIN). The part or identifying number for tension handles shall be as follows:

A 52045

CID Document identifier

Notes: The procuring agency should specify the preferred options permitted herein and include the following information in procurement documents:

1. Title, number, and date of this item description.
2. When the commercial item description is used for acquisition, the commercial item certification clause must appear in the solicitation.

FED-STD-376 is available from the Standardization Documents Order Desk, Building 4D, 700 Robbins Avenue, Philadelphia, PA 19111-5094.

The following is a suggested source of supply for this item description (Competition is not limited to this source):

1. Cooper Industries, Inc., Highway 1, South Apex, North Carolina 27502.

The preparing activity for this item description is the U.S. Army Belvoir Research, Development and Engineering Center, ATTN: STRBE-TSE, Ft. Belvoir, VA 22060-5606.

Source: https://assist.dla.mil -- Downloaded: 2026l0-26T09:05Z
Check the source to verify that this is the currentversion before use.

MILITARY INTEREST:

Custodians
Army - ME
Air Force - 82

Review activity
DLA - GS

CIVIL AGENCY COORDINATING ACTIVITIES:

GSA-FCGC

PREPARING ACTIVITY:

Army - ME

Project 6675-0893

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:05Z
Check the source to verify that this is the current version before use.

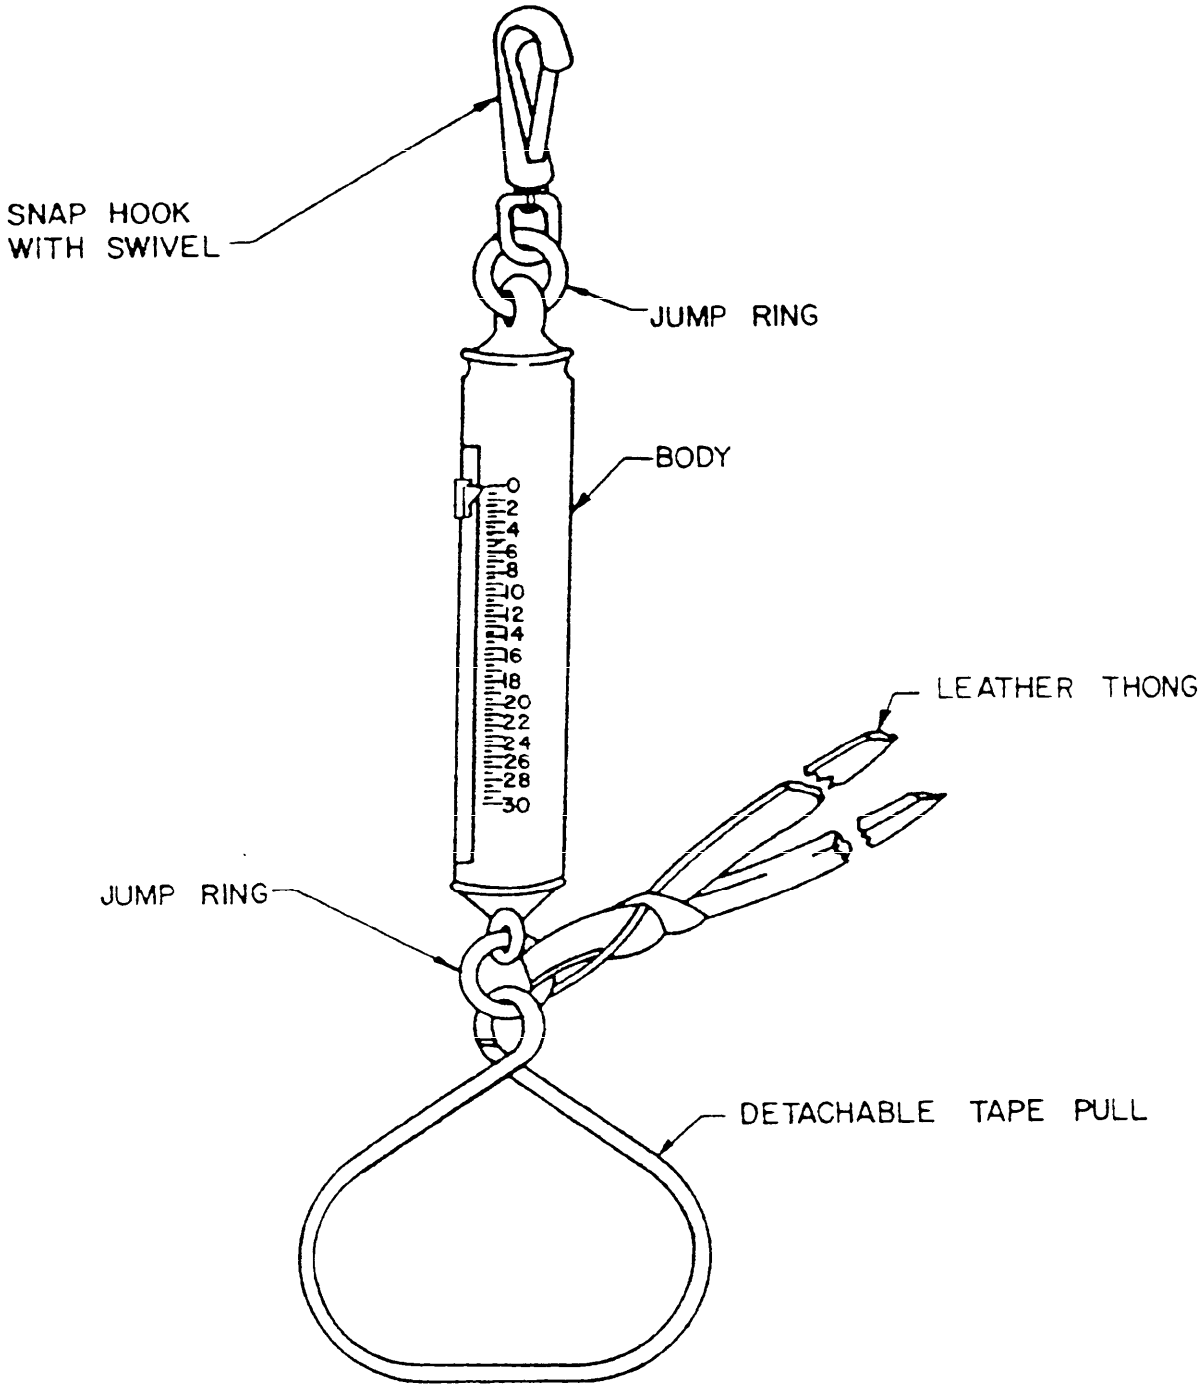


FIGURE 1. Tension handle, steel measuring tape, surveyor's.

X-3336

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:05Z
Check the source to verify that this is the current version before use.

4.4.2 Sampling. Sampling for examination shall be in accordance with