INCH-POUND


MIL-C-24758/16 (SH)
5 August 1991

MILITARY SPECIFICATION SHEET

CONDUIT, FLEXIBLE, WEATHERPROOF, ADAPTER FOR MISCELLANEOUS THREADED FITTINGS

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and the issue of the following specification listed in that issue of the Department of Defense Index of Specifications and Standards (DODISS) specified in the solicitation: MIL-C-24758 (SH).

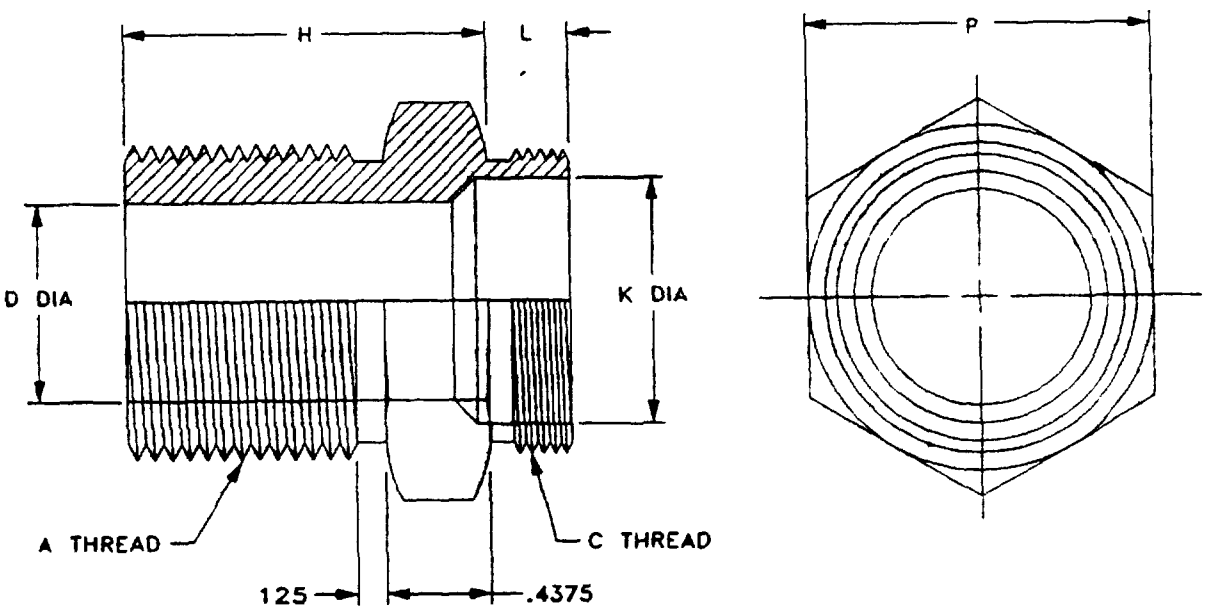

NOTES:
1. Dimensions are in inches.

FIGURE 1. Dimensions and configurations.

AMSC N/A FSC 5975

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T01:48Z
Check the source to verify that this is the current version before use.

TABLE I. Dimensions.

CONDUIT		ADAPTER	
SIZE CODE	C THREAD (Class 2A)	L ±.02	K DIA (Min.)
02	0.4375 - 28 UNEF	0.21	0.25
03	0.5625 - 24 UNEF	0.25	0.37
04	0.6875 - 24 UNEF	0.25	0.50
05	0.8125 - 20 UNEF	0.31	0.62
06	0.9375 - 20 UNEF	0.31	0.75
08	1.250 - 18 UNEF	0.37	1.00
10	1.5625 - 18 UNEF	0.37	1.25
12	1.875 - 16 UN	0.43	1.50
16	2.375 - 16 UN	0.43	2.00
20	2.875 - 16 UN	0.43	2.50
24	3.375 - 16 UN	0.43	3.00

TABLE II. A-THREAD code and adapter dimensions.


A THREAD CODE	A THREAD (Class 2A)	D DIA ±.005	H DIM ±.02	P DIM (Min.)
01	1.125 - 14.0 N	0.500	1.25	1.25
03	1.288 - 14.0 N	0.750	1.25	1.43
04	0.75 - 14.0 NPSM	0.750	1.25	1.37
06	1.0 - 11.5 NPSM	1.000	1.25	1.68
07	1.25 - 11.5 NPSM	1.000	1.25	1.81
09	1.25 - 11.5 NPSM	1.180	1.25	1.81
10	2.025 - 11.5 N	1.250	1.56	2.18
13	2.25 - 11.5 N	1.500	1.69	2.50
16	2.50 - 8.0 NPSM	2.000	2.00	3.00
19	3.0 - 8.0 NPSM	2.500	2.06	3.62
20	1.50 - 11.5 NPSM	1.500	1.25	2.50
21	2.0 - 11.5 NPSM	2.000	1.25	3.00

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T01:48Z
Check the source to verify that this is the current version before use.

NOTES:

1. The M24758/16 adapter couples miscellaneous fittings to M24758/2, M24758/3, or M24758/4 fittings.
2. The American National Thread series (N) has been superseded by the Unified Thread series (UN). The series N-thread sizes listed in table II are retained for use with those items which have series N-threads.
3. Dimensions are in inches.
4. Dimensions and configurations: See figure 1 and tables I and II.
5. Material, finish and markings: See MIL-C-24758 (SH).

Part or Identifying Number (PIN) Example:

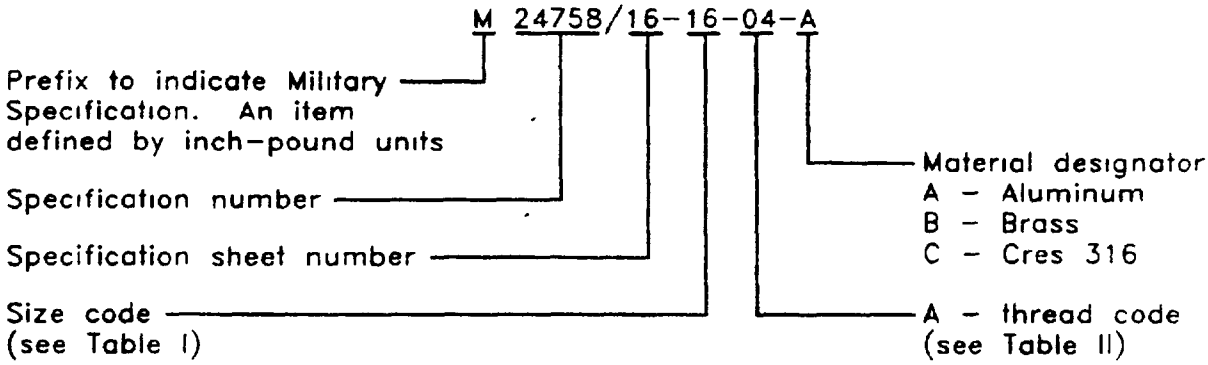

Preparing Activity:
Navy - SH
(Project 5975-N651-16)

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T01:48Z
Check the source to verify that this is the current version before use.