

MILITARY SPECIFICATION SHEET

TRANSFORMER, POWER, ISOLATION, TF5T03ZZ

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The complete requirements for procuring the transformer described herein shall consist of this document and the latest issue of Specification MIL-T-27.

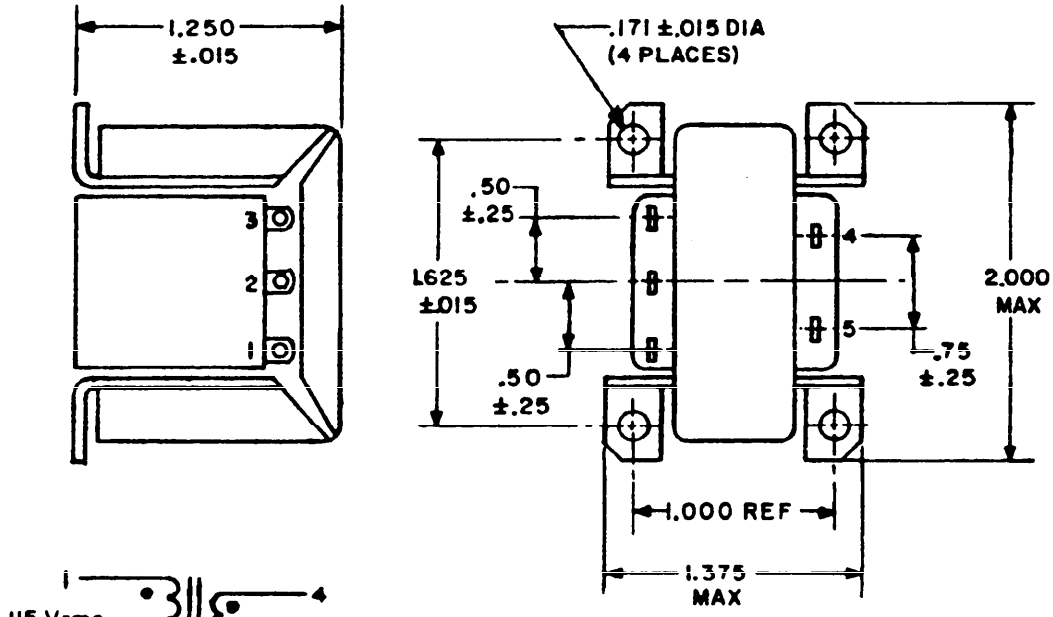

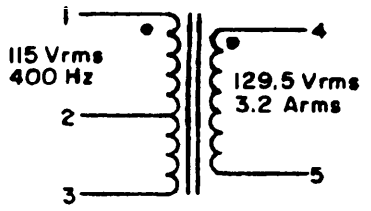

W V (PK): 130 V
ALTITUDE: 70 k FT MAX

CIRCUIT DIAGRAM
AND MARKING

INCHES	MM
.015	.38
.171	4.34
.25	6.4
.50	12.7
.75	19.0
1.000	25.40
1.250	31.75
1.375	34.92
1.625	41.28
2.000	50.80

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only and are based upon 1.00 inch = 25.4 mm.
3. Marking shall be on the side of the case.

FIGURE 1. Dimensions and configuration.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T03:58Z
Check the source to verify that this is the current version before use.

REQUIREMENTS: (When numbers in parentheses, i.e., (1-2) are used, they indicate the winding and the extreme terminals of the winding.)

Electrical ratings:
Primary voltage (1-3): 115 volts rms , 400 hertz.
Volt-ampere rating: 350 volt-amperes.
Secondary voltage (4-5): 129.5 volts rms.
Secondary current (4-5): 3.2 amperes rms.
Working voltage (peak): 130 volts.

Design and construction:
Dimensions and configuration: See figure 1.
Duty cycle: Continuous.
Case: Encapsulated.
Material: Epoxy.
Terminals: Solder terminal, tin plated copper.
Height: Not to extend beyond case.
Weight: 6 ounces, maximum.
Altitude: 70,000 feet, maximum.
Operating temperature range: -55°C to +170°C.

Terminal strength: MIL-STD-202, method 211, test condition A, 5.0 pounds.

Dielectric withstanding voltage:
At sea level: 1,500 volts rms.
At reduced barometric pressure: 300 volts rms.

Electrical characteristics:
No load: With 115 volts rms ct, 400 hertz across (1-3):
Current in (1-3): 3.0 amperes.
Power in (1-3): 360 watts, maximum.
Voltage across (4-5): 129.5 volts ±10 percent.
Rated load: With 115 volts rms ct, 400 hertz across (1-3):
Voltage across (4-5): 129.5 volts ±10 percent, maximum.
DC resistance:
(1-2): 0.03 ohm, maximum.
(2-3): 15 ohms, maximum.
(4-5): 146 ohms, maximum.
Polarity: Additive with 3 and 4 connected.

Temperature rise: 40°C with 112 volts rms, 400 hertz across (1-3) at an ambient temperature of 130°C.

Marking location: See figure 1.

Part number: M27/256.

Custodians:
Army - ER
Navy - EC
Air Force - 85

Review activities:
Army - MI
Navy - SH, OS
Air Force - 11, 17, 99
DLA - ES

User activities:
Army - AR, ME, WC
Navy - AS, MC
Air Force - 19

Preparing activity:
Army - ER

Agent:
DLA - ES

(Project 5950-0555-47)

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T03:58Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

OMB Approval
No. 22-R255

INSTRUCTIONS: The purpose of this form is to solicit beneficial comments which will help achieve procurement of suitable products at reasonable cost and minimum delay, or will otherwise enhance use of the document. DoD contractors, government activities, or manufacturers/ vendors who are prospective suppliers of the product are invited to submit comments to the government. Fold on lines on reverse side, staple in corner, and send to preparing activity. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements. Attach any pertinent data which may be of use in improving this document. If there are additional papers, attach to form and place both in an envelope addressed to preparing activity.

DOCUMENT IDENTIFIER AND TITLE MIL-T-27256 TRANSFORMER, POWER, ISOLATION
TF5T03ZZ

NAME OF ORGANIZATION AND ADDRESS	CONTRACT NUMBER
	MATERIAL PROCURED UNDER A ☐ DIRECT GOVERNMENT CONTRACT ☐ SUBCONTRACT

1. HAS ANY PART OF THE DOCUMENT CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE?
   A. GIVE PARAGRAPH NUMBER AND WORDING.

   B. RECOMMENDATIONS FOR CORRECTING THE DEFICIENCIES

2. COMMENTS ON ANY DOCUMENT REQUIREMENT CONSIDERED TOO RIGID

3. IS THE DOCUMENT RESTRICTIVE?
   ☐ YES ☐ NO *(If "Yes", in what way?)*

4. REMARKS

SUBMITTED BY *(Printed or typed name and address - Optional)*	TELEPHONE NO.
	DATE

DD FORM 1 JAN 72 1426 REPLACES EDITION OF 1 JAN 66 WHICH MAY BE USED

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T03:58Z
Check the source to verify that this is the current version before use.