

THE REQUIREMENTS FOR ACQUIRING THE PRODUCT(S) DESCRIBED HEREIN SHALL CONSIST OF THIS SPECIFICATION SHEET AND THE ISSUE OF THE FOLLOWING SPECIFICATION LISTED IN THAT ISSUE OF THE DODISS SPECIFIED IN THE SOLICITATION: MIL-R-8791

THIS SPECIFICATION IS APPROVED FOR USE BY ALL DEPARTMENTS AND AGENCIES OF THE DEPARTMENT OF DEFENSE.

Form Approved
OMB No. 0704-0188

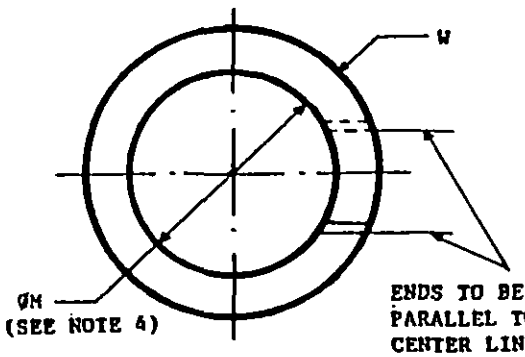

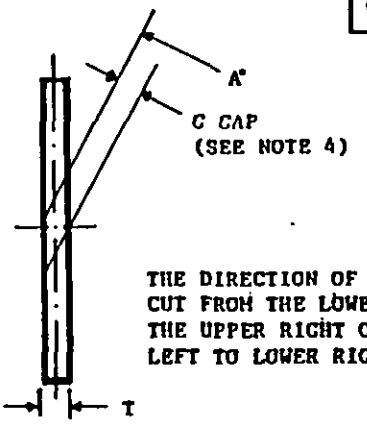

THE DIRECTION OF THE SCARF CUT FROM THE LOWER LEFT TO THE UPPER RIGHT OR FROM UPPER LEFT TO LOWER RIGHT IS OPTIONAL.

DASH NO.	ØM	±.001	T	W	G	A°	
004	.109		.052	.054	.005	39 +0-4	
			.045	.052	.000		
005	.124					33 +0-3	(L)
006	.140					30 +0-3	(L)
007	.171					26 +0-3	(L)
008	.202					22 +0-3	
009	.234						
010	.265						
011	.327						
012	.390						
013	.455						
014	.518						
015	.580						
016	.643						
017	.705						
018	.768						
019	.830						
020	.898						
021	.960						
022	1.023						
023	1.085						
024	1.148						
025	1.210						
026	1.273						
027	1.335						
028	1.398						
110	.390			.087	.006		
111	.452			.085	.000		
112	.515						
113	.577						
114	.640						
115	.702						
116	.765						
117	.832						
118	.895						
119	.957						
120	1.020						
121	1.082						
122	1.145						
123	1.207						
124	1.270						
125	1.332						
126	1.397						

DASH NO.	ØM	±.001	T	W	G	A°	
127	1.459		.052	.087	.006	22 +0-3	(L)
128	1.522		.045	.085	.000		
129	1.584						
130	1.647						
131	1.709						
132	1.772						
133	1.834						
134	1.897						
135	1.959						
136	2.022						
137	2.084						
138	2.147						
139	2.209						
140	2.258						
141	2.320						
142	2.383						
143	2.445						
144	2.508						
145	2.570						
146	2.633						
147	2.695						
148	2.758						
149	2.820						
210	.766			.120			
211	.828			.118			
212	.891						
213	.953						
214	1.016						
215	1.078						
216	1.141						
217	1.203						
218	1.266						
219	1.334						
220	1.397						
221	1.459						
222	1.522						
223	1.647				.007		
224	1.772				.000		
225	1.897						
226	2.022						
227	2.147						
228	2.272						
229	2.397						
230	2.522						

(L) denotes changes.

MS28774 IS INACTIVE FOR NEW DESIGN AFTER 25 MAR 1989 USE MIL-R-8791/1

PREPARING ACTIVITY: 82
CUSTODIANS: ARMY - MR NAVY-AS
AIR FORCE - 99 DLA -
REVIEW: SH, IS
USER:
PROJECT NUMBER: 5330-0847

MILITARY SPECIFICATION SHEET

TITLE
RETAINER, PACKING BACKUP, SINGLE TURN, TETRAFLUOROETHYLENE

SPECIFICATION SHEET NUMBER
MS28774L, 19 NOV 90

SUPERSEDING
MS28774K, 25MAR 89

AMSC-N/A FSC-5330

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T16:59Z
Check the source to verify that this is the current version before use.

DD Form 672, MAY 88 Previous editions are obsolete.
*U.S. GOVERNMENT PRINTING OFFICE:1988-240-979:80028

THE REQUIREMENTS FOR ACQUIRING THE PRODUCT(S) DESCRIBED HEREIN SHALL CONSIST OF THIS SPECIFICATION SHEET AND THE ISSUE OF THE FOLLOWING SPECIFICATION LISTED IN THAT ISSUE OF THE DODISS SPECIFIED IN THE SOLICITATION: MIL-R-8791

THIS SPECIFICATION IS APPROVED FOR USE BY ALL DEPARTMENTS AND AGENCIES OF THE DEPARTMENT OF DEFENSE.

Form Approved
OMB No. 0704-0188

DASH NO.	ØM		T	W	G	A°
231	2.631	±.001	.052	.120	.007	22 +0-3
232	2.756		.045	.118	.008	
233	2.881					
234	3.006					
235	3.131					
236	3.256					
237	3.381					
238	3.506					
239	3.631					
240	3.756					
241	3.881					
242	4.006					
243	4.131					
244	4.256					
245	4.381					
246	4.506					
247	4.631					
325	1.513		.075	.184		
326	1.638		.065	.182		
327	1.763					
328	1.888					
329	2.013					
330	2.138					
331	2.268					
332	2.393					
333	2.518					
334	2.643					
335	2.768					
336	2.893					
337	3.018					
338	3.143					
339	3.273					
340	3.398					
341	3.523					
342	3.648					
343	3.773					
344	3.898					
345	4.028					
346	4.153					
347	4.278					
348	4.403					
349	4.528					

DASH NO.	ØM		T	W	G	A°
425	4.551	±.001	.110	.237	.008	22+0-3
426	4.676		.100	.235	.009	
427	4.801					
428	4.926					
429	5.051					
430	5.176					
431	5.301					
432	5.426					
433	5.551					
434	5.676					
435	5.801					
436	5.926					
437	6.051					
438	6.274					
439	6.524					
440	6.774					
441	7.024					
442	7.274					
443	7.524					
444	7.774					
445	8.024					
446	8.524					
447	9.024					
448	9.524					
449	10.024					
450	10.524				.010	
451	11.024				.009	
452	11.524					
453	12.024					
454	12.524					
455	13.024					
456	13.524					
457	14.024					
458	14.524					
459	15.024					
460	15.524					

NOTES

1. SURFACES MUST BE SMOOTH AND FREE FROM IRREGULARITIES. EDGES MUST BE CLEAN AND SHARP.
2. DIMENSION "A" IN DEGREES, ALL OTHERS IN INCHES.
3. FOR USE IN PACKING GROOVES CONFORMING TO MIL-G-5514.
4. IN MEASURING DIMENSIONS ØM OVER A MANDREL THE SCARF CUT SHALL NOT EXCEED DIMENSION "G" AND NO OVERLAP PERMITTED BEYOND THE FULL SCARF.
5. FOR DASH SIZES 140-149, 231-247, 438-460, IT IS RECOMMENDED THAT THE RESPECTIVE DASH SIZES UNDER MS27595 (NOT CUT) BE USED WHEN POSSIBLE.
6. REVISION "L" CORRECTS ERROR IN A° DIMENSION FOR DASH NUMBERS 127 THROUGH 149 AND CHANGES A° DIMENSION ON DASH NUMBERS 005, 006, AND 007.

PREPARING ACTIVITY: 82
CUSTODIANS: ARMY - MR NAVY - AS
AIR FORCE - 99 DLA -
REVIEW: SH, IS
USER:
PROJECT NUMBER: 5330-0847

MILITARY SPECIFICATION SHEET
TITLE
RETAINER, PACKING BACKUP, SINGLE TURN, TETRAFLUOROETHYLENE

SPECIFICATION SHEET NUMBER
MS28774L, 19 NOV 90
SUPERSEDING
MS28774K, 25 MAR 89
AMSC - N/A FSC - 5330

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T16:59Z
Check the source to verify that this is the current version before use.