MILITARY SPECIFICATION

CISTERN

1. SCOPE

1.1 This specification covers one type of cistern, suitable for use with type A-1 barometers.

2. APPLICABLE DOCUMENTS

2.1 The following document, of the issue in effect on date of invitation for bids or request for proposal, forms a part of this specification to the extent specified herein:

STANDARD

Military

MIL-STD-105 Sampling Procedures and Tables for Inspection by Attributes.

(Copies of standards required by suppliers in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

3. REQUIREMENTS

3.1 Material. The cistern shall be fabricated from precision-bore borosilicate glass tubing. The glass shall have a coefficient of expansion of 33.5×10^{-7} cm/cm/°C.


3.2 Style, design, and dimensions. The cistern shall be in strict accordance with figure 1. The cistern shall have an overall length of 2-1/2 ± 1/16 inches, an outside diameter of 3-7/8 inches, and an inside diameter of 3.265 ± 0.002 inches. The ends shall be at right angles to the bore(± 1 °), and parallel within 1/64 inch.


FSC 6640

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T08:27Z
Check the source to verify that this is the current version before use.

-NOTE-

ENDS MUST BE AT RIGHT ANGLES TO BORE ± 1° AND PARALLEL WITHIN 1/64. FINISH GRIND WITH #600 GRIT CARBORUNDUM. ENDS MUST BE FLAT WITHIN .0005 FULL INDICATOR READING

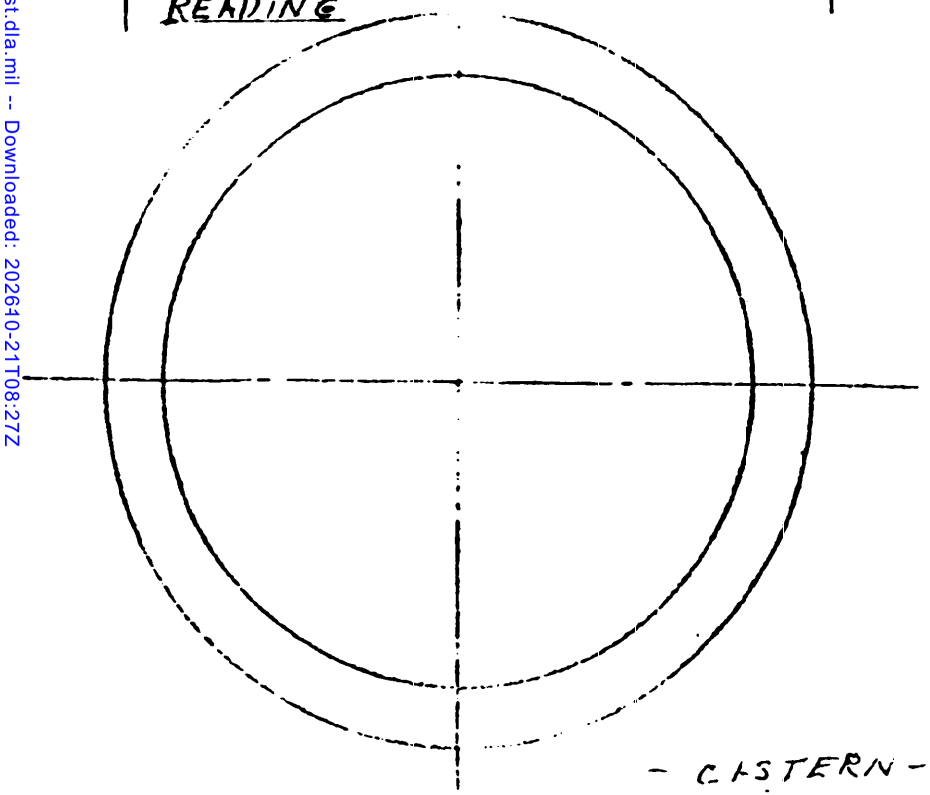

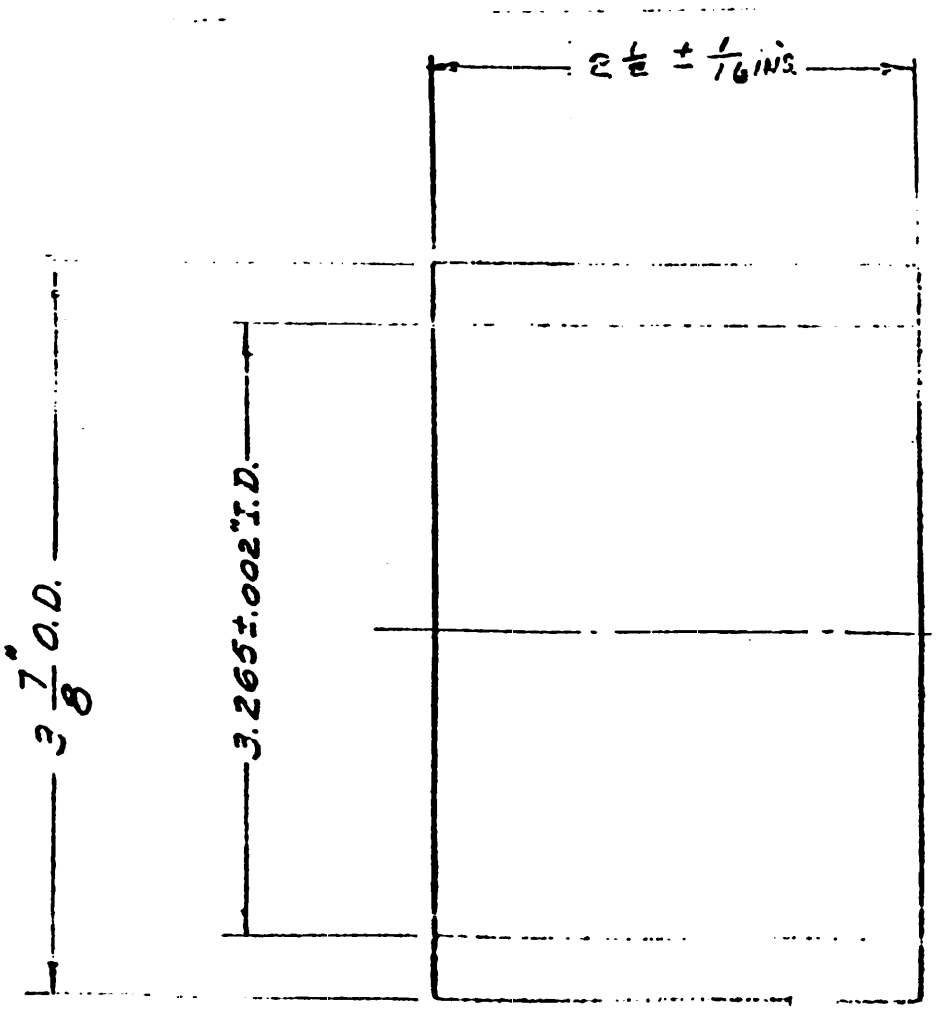

- CASTERN -

FIGURE 1

Tol. fractions ± .005"

Source: https://assist.dla.mil -- Downloaded: 20260-21T08:27Z
Check the source to verify that this is the current version before use.

3.2.1 Gaskets. Two gaskets shall be furnished with each cistern. The gaskets shall be so designed and of such material that there is a perfect seal between the cistern and the barometer base and the cistern lid (top and bottom).

3.3 Finish. The cistern shall be finish-ground with 600 grit carborundum. The ends shall be flat within 0.0005 full indicator reading.

3.4 Workmanship. Workmanship shall be first quality throughout. The cistern shall be free from defects which detract from its appearance or may impair its serviceability.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. Unless otherwise specified in the contract or purchase order, the supplier is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified, the supplier may utilize his own facilities or any commercial laboratory acceptable to the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure supplies and services conform to prescribed requirements.

4.1.1 Inspection. Inspection, as used in this specification, is defined as both examination (such as visual, auditory, etc., investigation without the use of special laboratory appliances or procedures) and testing (determination by technical means of physical and chemical properties) of the item.

4.1.2 Certificates of quality. When available, certificates of quality, supplied by the manufacturer of the component or material, listing the specified test method and test results obtained, may be furnished in lieu of actual performance of such testing by the contractor.

4.2 Sampling. Sampling shall be conducted in accordance with MIL-STD-105.

4.3 Examination. The cistern shall be examined to determine compliance with all requirements contained in this specification.

4.4 Tests. Tests shall be conducted to determine compliance with specification requirements.

5. PREPARATION FOR DELIVERY

5.1 Packaging and packing. Level C. The commodity shall be packaged and packed in substantial commercial containers of the type, size, and kind commonly

Source: https://assist.dla.mil -- Downloaded: 202610-21T08:27Z
Check the source to verify that this is the current version before use.

used for the purpose, so constructed as to insure acceptance and safe delivery by common or other carriers, at the lowest rate, to point of delivery called for in the contract or purchase order.

5.2 Marking.

5.2.1 Interior packages. Each package shall be marked to identify contents.

5.2.2 Exterior containers. Exterior containers shall be marked with stock number, name of material, quantity, name of consignee, name of consignor, and contract or purchase order number.

6. NOTES

6.1 Ordering data. Procurement documents should specify the number and date of this specification.

6.2 This specification does not include all types, classes, grades, sizes, etc., of the commodity indicated by the title of this specification, or which are commercially available, but is intended to cover the types, etc., which are normally procured to meet Military requirements.

Custodians:
Army - MD
Navy - MS
Air Force - 03

Preparing activity:
Defense Supply Agency - DM

Review activities:
Army - MD
Navy - MS
Air Force - 03

Review information is current as of the date of this document. For future coordination of changes to this document, draft circulation should be based on the information in the current DODISS.

Category: C

Source: https://assist.dla.mil -- Downloaded: 202640-21T08:27Z
Check the source to verify that this is the current version before use.

SPECIFICATION ANALYSIS SHEET

Form Approved
Budget Bureau No. 119-R004

INSTRUCTIONS

This sheet is to be filled out by personnel either Government or contractor, involved in the use of the specification in procurement of products for ultimate use by the Department of Defense. This sheet is provided for obtaining information on the use of this specification which will insure that suitable products can be procured with a minimum amount of delay and at the least cost. Comments and the return of this form will be appreciated. Fold on lines on reverse side, staple in corner, and send to preparing activity *(as indicated on reverse hereof)*.

SPECIFICATION

MILITARY SPECIFICATION CISTERN MIL-C-36350(DM), dated 10 December 1964

ORGANIZATION *(Of submitter)*	CITY AND STATE

CONTRACT NO.	QUANTITY OF ITEMS PROCURED	DOLLAR AMOUNT
		$

MATERIAL PROCURED UNDER A

☐ DIRECT GOVERNMENT CONTRACT ☐ SUBCONTRACT

1. HAS ANY PART OF THE SPECIFICATION CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE?

A. GIVE PARAGRAPH NUMBER AND WORDING.

B. RECOMMENDATIONS FOR CORRECTING THE DEFICIENCIES.

2. COMMENTS ON ANY SPECIFICATION REQUIREMENT CONSIDERED TOO RIGID

3. IS THE SPECIFICATION RESTRICTIVE?

☐ YES ☐ NO IF "YES", IN WHAT WAY?

4. REMARKS *(Attach any pertinent data which may be of use in improving this specification. If there are additional papers, attach to form and place both in an envelope addressed to preparing activity)*

SUBMITTED BY *(Printed or typed name and activity)*	DATE

DD FORM 1 APR 63 1426 REPLACES NAVSHIPS FORM 4863, WHICH IS OBSOLETE C-0870

Source: https://assist.dla.mil -- Downloaded: 202610-21T08:27Z
Check the source to verify that this is the current version before use.

CAUTION

NOTICE TO BIDDERS/OFFERORS

DO NOT CONDITION OR BASE YOUR BID/OFFER ON ANY CURRENT PROCUREMENT ON THE INFORMATION SUBMITTED ON THIS FORM SINCE ANY CHANGES OR DELETIONS IN THE SPECIFICATIONS MAY RENDER YOUR BID/OFFER NON-RESPONSIVE IN WHICH CASE IT CANNOT BE CONSIDERED FOR AWARD.

FOLD

DEFENSE SUPPLY AGENCY
DEFENSE MEDICAL SUPPLY CENTER
THIRD AVENUE AND 29TH STREET
BROOKLYN, N.Y. 11232

OFFICIAL BUSINESS

POSTAGE FEES PAID
DEFENSE SUPPLY AGENCY

Defense Supply Agency
Defense Medical Supply Center
ATTN: Directorate of Technical Operations (Code T-M6)
3rd Avenue and 29th Street
Brooklyn, N.Y. 11232

FOLD

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T08:27Z
Check the source to verify that this is the current version before use.