
MILITARY SPECIFICATION SHEET

CONTACTS, ELECTRICAL CONNECTOR, SOCKET, CRIMP REMOVABLE, (FOR MIL-C-81511 SERIES 2 CONNECTORS)

INACTIVE FOR NEW DESIGN

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The complete requirements for acquiring the contacts described herein shall consist of this specification sheet and the latest issue of MIL-C-39029.

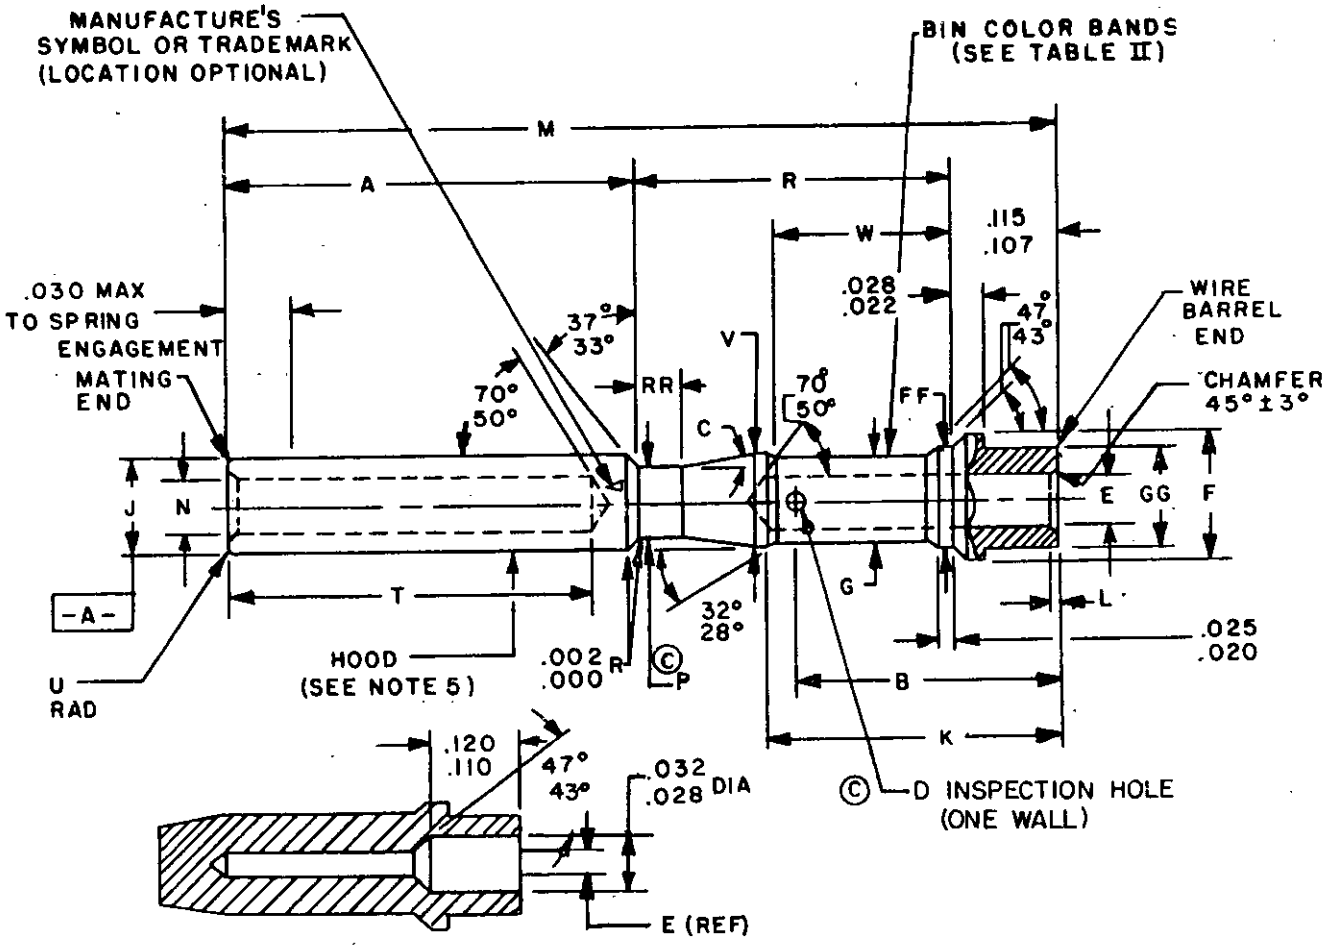

OPTIONAL WIRE BARREL FOR - 302

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only.
3. Metric equivalents are in parentheses for overall length and diameter only.
4. Dimensions shown apply after plating.
5. Hood must but against contact body.

© FIGURE 1. Connector contact.

© denotes changes

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T18:37Z
Check the source to verify that this is the current version before use.
DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Dimensions.

BIN code	A	B	C (DEG)	D DIA	E DIA	F DIA	FF DIA	G DIA	GG DIA	J DIA	K	L
302		.201	8	.022	.020 .018	.064 (1.63)		.0545	.050	.051	.235	
304		.190	7	.018	.037 .035	.062 (1.57)	N/A	.052	.048	.049	.215	.006
306	.356 .344	.252 .241			.050 .048	.103 (2.62) .100 (2.54)		.078 .075	.078 .076	.078 .076	.276 .256	.003
308		.257	11 .10	.032 .026	.068 .066	.133 (3.38) .130 (3.30)	.113 .110	.105 .101	.103 .101	.113 .110	.286 .266	
310		.246			.102 .098	.190 (4.83) .187 (4.75)	.161 .158	.152 .148	.158 .155	.161 .158	.296 .276	.010 .005

BIN code	M (REF)	N MIN DIA ONLY	P DIA	R	RR	T	U RAD	V DIA	W	APPROX. WEIGHT (LBS)
302	.713 (18.11)	.028	.039	.254		.220	.006	N/A	N/A	.00041
304			.036	.249		.170	.004			.00035
306		.0415	.065 .062		.040 .035	.320	.009 .007	.0805 .078	.120 .114	.00062
308	.718 (18.24)	.064	.099 .096	.259 .254		.270	.012 .009	N/A	N/A	.00122
310		.0955	.145 .142			.270 .250	.017 .013			.00240

© FIGURE 1. Connector contact - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T18:37Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Dimensions, design characteristics, and configuration: See figure 1 and table I.

Tools: See table II.

Vibration: Method 2005 of MIL-STD-1344, test condition IV.

Shock (specified pulse): Method 2004 of MIL-STD-1344, test condition A.

© Mating contact: MIL-C-39029/47 and MIL-C-39029/18.

NOTE: For MIL-C-81511 connectors, series 1 is intermateable with series 3 and series 2 is intermateable with series 4. The respective contacts for these connectors are required to be intermateable but are not interchangable.

© QPL evaluating activity: Naval Avionics Center, Code B-714, Indianapolis, Indiana 46218.

Military part number: See table III.

TABLE I. Design characteristics.

BIN code	Color bands			Mating end size	Wire barrel size	Type	Class
	1st	2nd	3rd				
302	Orange	Black	Red	23	28	A	B
304	Orange	Black	Yellow	23	22	A	B
306	Orange	Black	Blue	20	20	A	B
308	Orange	Black	Gray	16	16	A	B
310	Orange	Brown	Black	12	12	A	B

© TABLE II. Tools.

BIN code	Basic crimping tool	Positioner	Installing tool	Removal tool
302	M22520/2-01	M22520/2-03	M81969/2-01	M81969/3-01
304	M22520/2-01	M22520/2-03	M81969/2-01	M81969/3-01
306	M22520/1-01 M22520/7-01	M22520/1-08 Red M22520/7-09	M81969/2-02	M81969/3-02
308	M22520/1-01 M22520/7-01	M22520/1-08 Blue M22520/7-10	M81969/2-03	M81969/3-03
310	M22520/1-01	M22520/1-08 Yellow	M81969/2-04	M81969/3-04

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T18:37Z
Check the source to verify that this is the current version before use.

TABLE III. Military part number.

BIN code	Military part number	Supersedes
302	M39029/46-302	M39029/46-301 MS90460A23-28 MS90460B23-28
304	M39029/46-304	M39029/46-303 MS90460B23-22 MS90460B23-22
306	M39029/46-306	M39029/46-305 MS90460A20-20 MS90460B20-20
308	M39029/46-308	M39029/46-307 MS90460A16-16 MS90460B16-16
310	M39029/46-310	M39029/46-309 MS90460A12-12 MS90460B12-12

Custodians:
Army - CR
Navy - AS
Air Force - 85

Review activities:
Navy - EC, MC, SH, TD
Air Force - 99
DLA - ES

User activity:
Navy - OS

Agent:
DLA - ES

Preparing activity:
Navy - AS

(Project 5935-3462-2)

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T18:37Z
Check the source to verify that this is the current version before use.