
MILITARY SPECIFICATION SHEET

CONTACTS, ELECTRICAL CONNECTOR, PIN, CRIMP REMOVABLE, (FOR MIL-C-81511 SERIES 1 AND 2 CONNECTORS)

INACTIVE FOR NEW DESIGN

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The complete requirements for acquiring the contacts described herein shall consist of this specification sheet and the latest issue of MIL-C-39029.

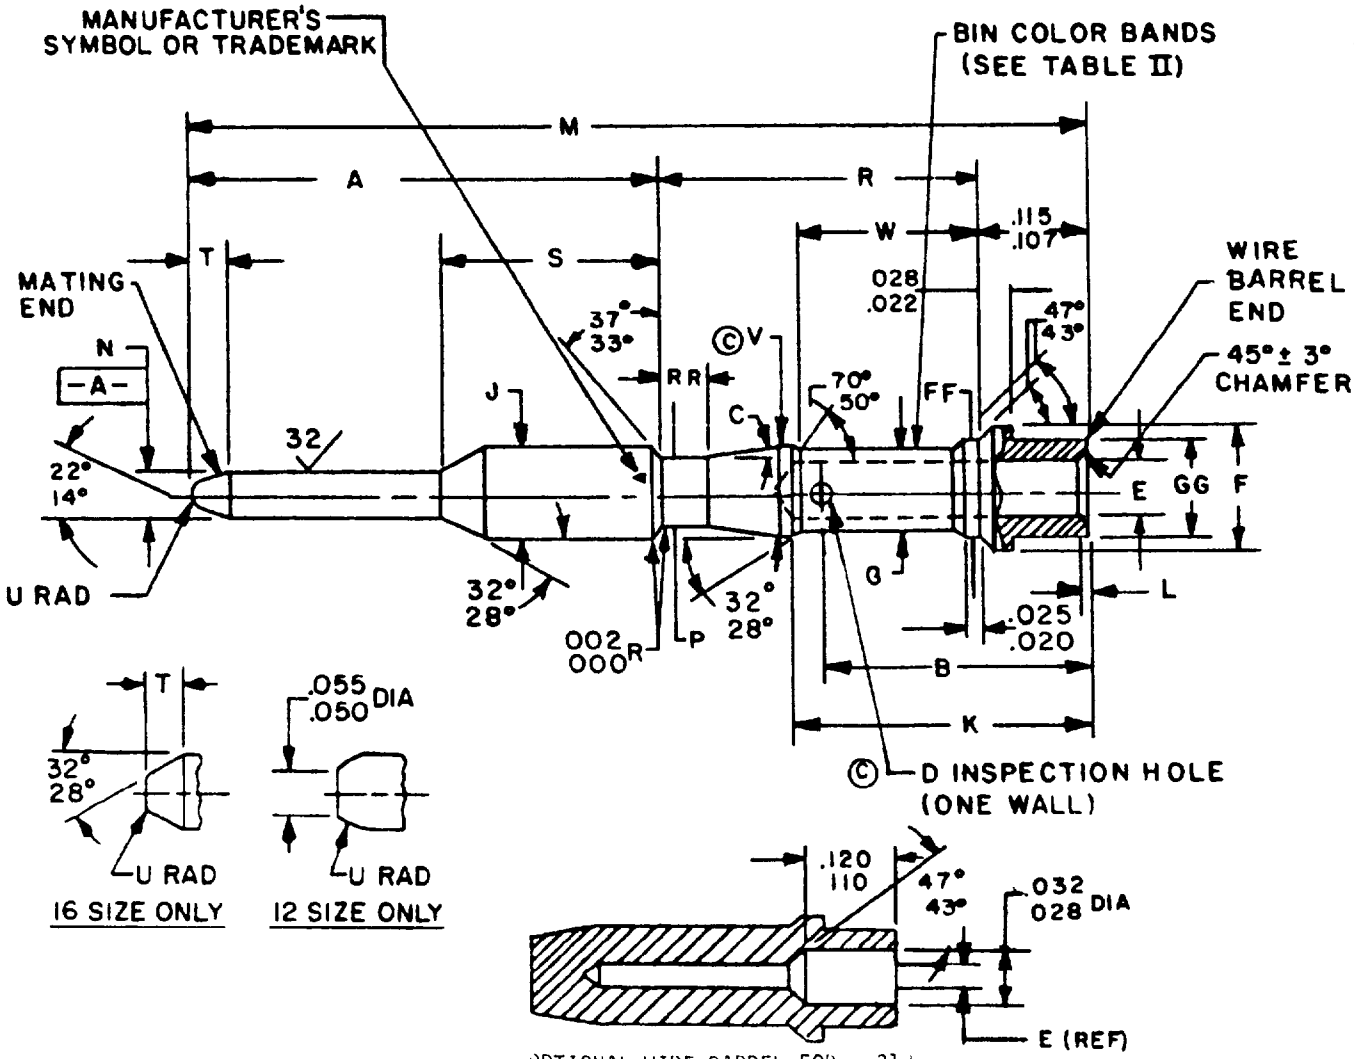

NOTES
1. Dimensions are in inches.
2. Metric equivalents are given for general information only
3. Metric equivalents are in parentheses for overall length and diameter only.
4. Dimensions shown apply after plating.

FIGURE 1. Connector contact

© denotes changes

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited
Source: https://assist.dla.mil - Downloaded: 2026-10-21T18:37Z
Check the source to verify that this is the current version before use.

Dimensions.

BIN code	A	B	C (DEG)	D DIA	E DIA	F DIA	FF DIA	G DIA	GG DIA	J DIA	K	L
312		.201	8	.022	.020 .018	.064 (1.63)		.0545	.050	.051	.235	
314		.190	7	.018	.037 .035	.062 (1.57)	N/A	.052	.048	.049	.215	.006
316	.391 .382	.252 .241			.050 .048	.103 (2.62) .100 (2.54)		.078 .075	.078 .076	.078 .076	.276 .256	.003
337		.257	11 10	.032 .026	.068 .066	.133 (3.38) .130 (3.30)	.113 .110	.105 .101	.103 .101	.113 .110	.286 .266	
339		.246			.102 .098	.190 (4.83) .187 (4.75)	.161 .158	.152 .148	.158 .155	.161 .158	.296 .276	.010 .005

BIN code	M (REF)	N DIA	P DIA	R	RR	S	T	U RAD	V DIA	W	APPROX. WEIGHT (LBS)
312	.749 (19.02)	.0275	.039	.254			.029	.009	N/A	N/A	.00037
314		.026	.036	.249			.024	.006			.00031
316	.745 (19.13)	.041 .039	.065 .062		.040 .035	.186 .179	.030	.016	.0805 .078	.120 .114	.00066
337		0635 0615	.099 .096	.259 .254			.025	.010	N/A	N/A	.00127
339		.095 .093	.145 .142				N/A	.041 .031			.00225

FIGURE 1. Connector contact - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T18:37Z
Check the source to verify that this is the current version before use.

REQUIREMENTS

Dimensions, design characteristics, and configuration: See figure 1 and table I.

Tools: See table II.

Vibration Method 2005 of MIL-STD-1344, test condition IV.

Shock (specified pulse): Method 2004 of MIL-STD-1344, test condition A.

Ⓒ Mating contact MIL-C-39029/45 and MIL-C-39029/33, MIL-C-39029/16 and MIL-C-39029/17.

NOTE For MIL-C-81511 connectors, series 1 is intermateable with series 3 and series 2 is intermateable with series 4. The respective contacts for these connectors are required to be intermateable but are not interchangable.

Ⓒ QPL evaluating activity: Naval Avionics Center, Code B-714, Indianapolis, Indiana 46219.

Military part number: See table III.

TABLE I. Design characteristics.

BIN code	Color bands			Mating end size	Wire barrel size	Type	Class
	1st	2nd	3rd				
312	Orange	Brown	Red	23	28	A	B
314	Orange	Brown	Yellow	23	22	A	B
316	Orange	Brown	Blue	20	20	A	B
337	Orange	Orange	Violet	16	16	A	B
339	Orange	Orange	White	12	12	A	B

Ⓒ TABLE II. Tools.

BIN code	Basic crimping tool	Positioner	Installing tool	Removal tool
312	M22520/2-01	M22520/2-03	M81969/2-01	M81959/3-05
314	M22520/2-01	M22520/2-03	M81969/2-01	M81969/3-05
316	M22520/1-01 M22520/7-01	M22520/1-08 Red M22520/7-09	M81969/2-02	M81959/3-06
337	M22520/1-01 M22520/7-01	M22520/1-08 Blue M22520/7-10	M81969/2-03	M81969/3-07
339	M22520/1-01	M22520/1-08 Yellow	M81969/2-04	M81959/3-08

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T18:37Z
Check the source to verify that this is the current version before use.

TABLE III. Military part number.

BIN code	Military part number	Supersedes
312	M39029/47-312	M39029/47-311 MS90461A23-28 MS90461B23-28
314	M39029/47-314	M39029/47-313 MS90461B23-22 MS90461B23-22
316	M39029/47-316	M39029/47-315 MS90461A20-20 MS90461B20-20
337	M39029/47-337	M39029/47-336 MS90461A16-16 MS90461B16-16
339	M39029/47-339	M39029/47-338 MS90461A12-12 MS90461B12-12

Custodians.
Army - CR
Navy - AS
Air Force - 85

Review activities
Navy - EC, MC, SH, TD
Air Force - 99
DLA - ES

User activity
Navy - OS

Agent
DLA - ES

Preparing activity.
Navy - AS

(Project 5935-3462-3)

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T18:37Z
Check the source to verify that this is the current version before use.