
This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product(s) described herein shall consist of this specification sheet and the issue of the following specification listed in that issue of the DoDISS specified in the solicitation: MIL-S-13623

Form Approved
OMB No. 0704-0188

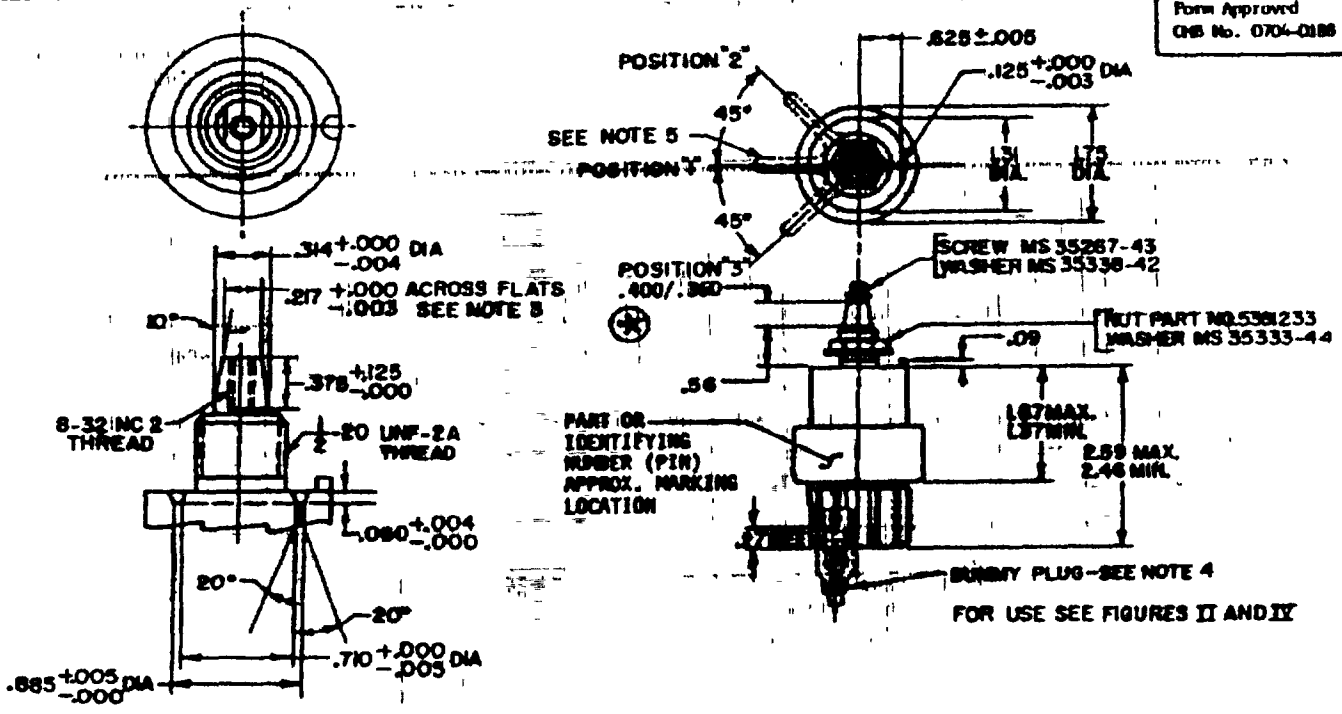

LEVER STEM DETAIL

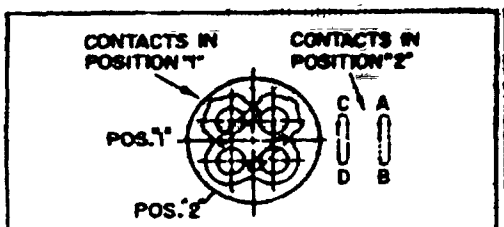


FIGURE I - MPST

WITH LEVER IN POSITION "1" SWITCH IS OFF, WITH LEVER IN POSITION "2" CONTACTS "A" & "B" ARE CLOSED AND "C" & "D" ARE CLOSED.

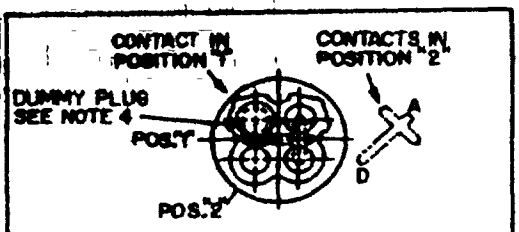


FIGURE II - SPMT

SELECTING SWITCH SHORTING CIRCUITS CONTACT "A" IS COMMON WITH LEVER IN POSITION "1" CONTACTS "A" & "B" ARE CLOSED, WITH LEVER IN POSITION "2" CONTACTS "A" & "D" ARE CLOSED.

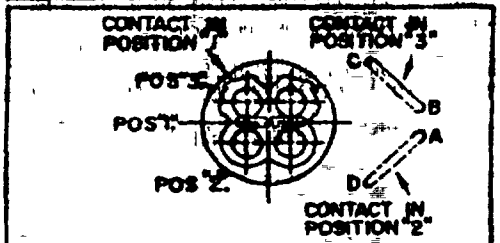


FIGURE III - 6PMT

WITH LEVER IN POSITION "1" SWITCH IS OFF, WITH LEVER IN POSITION "2" CONTACTS "A" & "D" ARE CLOSED, WITH LEVER IN POSITION "3" CONTACTS "B" & "C" ARE CLOSED.

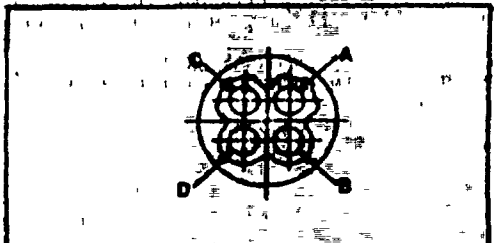


FIGURE IV - SPST

TYPE III SWITCH TO BE USED AS A SPST SWITCH BY USING CONTACTS "A" & "B" OR "C" & "D" DUMMY PLUG - SEE NOTE 4 - TO BE INSERTED IN UNUSED CONTACTS ON APPLICABLE VEHICLE ASSEMBLY

⊛ DENOTES CHANGES MADE IN CONJUNCTION WITH CONVERSION FROM MILITARY STANDARD TO SPECIFICATION SHEET FORMAT.

PREPARING ACTIVITY: ARMY-AT CUSTODIANS: ARMY-AT NAVY-AIR FORCE- REVIEW: ARMY-MI, EA; DLA-ES USER: ARMY-ME PROJECT NUMBER: 5930-1419	MILITARY SPECIFICATION SHEET TITLE: SWITCHES, ROTARY: 28 VOLT DC	SPECIFICATION SHEET NUMBER: MIL-S-13623/1 5 NOVEMBER 1990 SUPERSEDING: MS39060A(AT), 22 JUNE 1967 AMSC-N/A FSC-5930

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T00:56Z
Check the source to verify that this is the current version before use.

The requirements for acquiring the product(s) described herein shall consist of this specification sheet and the issue of the following specification listed in that issue of the DoDISS specified in the solicitation: MIL-S-13623

This specification is approved for use by all Departments and Agencies of the Department of Defense.

Form Approved
OMB No. 0704-0188

PART OR IDENTIFYING NUMBER (PIN)	SWITCH TYPE	FIGURE NO	LEVER POSITION			LEAD CIRCUITRY		
			1	2	3	POSITION 1	POSITION 2	POSITION 3
MIL-S-13623/1-1	II	II	ON	ON	NONE	A & B CLOSED	A & D CLOSED	NONE
MIL-S-13623/1-2	III	I	OFF	ON	NONE	OFF	A&B C&D CLOSED	NONE
MIL-S-13623/1-3	IV	III	OFF	ON	ON	OFF	A & D CLOSED	B & C CLOSED
MIL-S-13623/1-4	I	IV						

PART OR IDENTIFYING NUMBER (PIN)	SUPERSEDES	
	MS PART NO.	FORMER PART NO.
MIL-S-13623/1-1	MS39060-1	8380700
MIL-S-13623/1-2	MS39060-2	8380699
MIL-S-13623/1-3	MS39060-3	8380701
MIL-S-13623/1-4	MS39060-4	

NOTES:
1. SWITCH TYPES.
   TYPE I (SINGLE POLE, SINGLE THROW) CLASS 1.
   TYPE II (SINGLE POLE, MULTI-THROW) CLASS 1.
   TYPE III (MULTI-POLE, SINGLE THROW) CLASS 1.
   TYPE IV (MULTI-POLE, MULTI-THROW) CLASS 1.
2. CONTACT RATING (AT 28 VOLTS): 10 AMP RESISTIVE LOAD; 10 AMP INDUCTIVE LOAD; 5 AMP LAMP LOAD.
3. FLATS SHALL BE AS SHOWN WHEN THE SWITCH LEVER IS IN POSITION 1.
4. PLAIN CONNECTORS MATE WITH MS27144-1 AND MS27144-2. RIBBED CONNECTORS MATE WITH MS27144-3. DUMMY CONNECTORS (8338561 WITH 7982907) NOT SUPPLIED AS PART OF SWITCH.
5. LEVER SHALL NOT BE SUPPLIED AS PART OF SWITCH. LEVER USED WILL BE DETERMINED BY VEHICLE APPLICATION. FOR INFORMATION AND REFERENCE ONLY SEE DRAWINGS 5381088, 10896915 AND 10938483.
6. DIMENSIONS ARE IN INCHES. UNLESS OTHERWISE SPECIFIED, TOLERANCES ARE ± .02 ON DECIMALS; ± 2° ON ANGLES.
7. FOR DESIGN FEATURE PURPOSES, THIS SPECIFICATION SHEET TAKES PRECEDENCE OVER PROCUREMENT DOCUMENTS REFERENCED HEREIN.
8. REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON THE DATE OF INVITATION FOR BID.
9. THIS STANDARD IS NOT INTENDED TO LIMIT CONSTRUCTION TO FEATURES OTHER THAN AS SHOWN HEREON BY DIMENSIONS, NOTATIONS AND REFERENCED DOCUMENTS.
10. THE PART OR IDENTIFYING NUMBER CONSISTS OF THE SPECIFICATION SHEET NUMBER PLUS A DASH NUMBER. EXAMPLE: MIL-S-13623/1-2.
11. MARKING SHALL CONSIST OF THE PART OR IDENTIFYING NUMBER AND THE MANUFACTURER'S IDENTIFICATION IN ACCORDANCE WITH MIL-STD-130. IDENTIFICATION MARKING OF TERMINALS A,B,C AND D SHALL BE ADJACENT TO THE TERMINALS.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T00:56Z
Check the source to verify that this is the current version before use.