INCH POUND

A-A-1922A
18 JULY 1995
SUPERSEDING
A-A-1922
2 May 1983

# COMMERCIAL ITEM DESCRIPTION

## SHIELD, EXPANSION
## (CAULKING ANCHORS, SINGLE LEAD)


The General Services Administration has authorized the use of this Commercial Item Description for all Federal agencies

1 SCOPE. This Commercial Item Description (CID) covers the following types of single lead caulking anchors for use in attaching equipment and fixtures to masonry

Type 1 - Expansion Nut Anchors (TABLE I)
Type 2 - Expansion Bolt Anchors, single-end expansion sleeve (TABLE II)
Type 3 - Expansion Bolt Anchors, double-end expansion sleeve (TABLE II)

2. SALIENT CHARACTERISTICS

2 1 Caulking anchor configurations

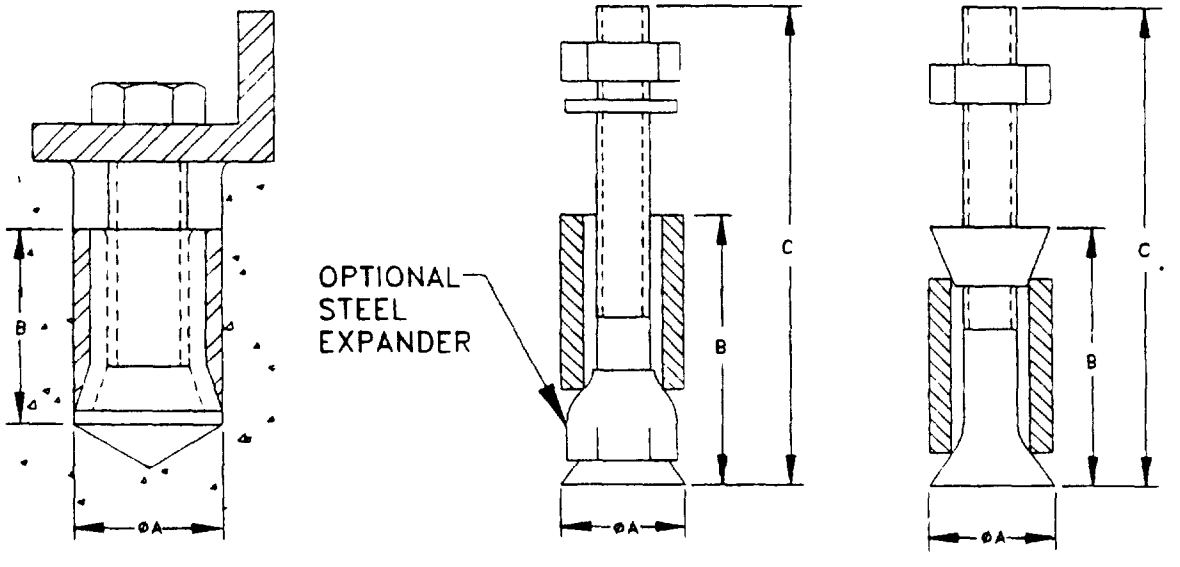


TYPE 1 TYPE 2 TYPE 3

Beneficial comments, recommendations, additions, deletions, clarifications, etc , and data which may improve this document should be sent to: Defense Industrial Supply Center, Attn: DISC-ECB, 700 Robbins Avenue, Philadelphia, PA 19111-5096



DISTRIBUTION STATEMENT A Approved for public release; distribution is unlimited

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:18Z
Check the source to verify that this is the current version before use.

TABLE I TYPE 1, DASH NUMBERS AND DIMENSIONS

| Type 1 Dash Numbers | Thread Size UNC-2B | Anchor Dimensions | | Average Ultimate Capacity [1,2] (Lbs ) |
|---|---|---|---|---|
| | | Outside Diameter A(Minimum) | Assembled Height B With an Expander (Minimum) | |
| 101 | .138-32 | 250 | 375 | 150 |
| 102 | 164-32 | 3125 | 500 | 250 |
| 103 | 190-24 | 375 | 625 | 300 |
| 104 | .216-24 | 4375 | 750 | 400 |
| 105 | 250-20 | 500 | 750 | 500 |
| 106 | 3125-18 | 625 | 1.000 | 850 |
| 107 | 375-16 | 750 | 1 250 | 1250 |
| 108 | 500-13 | 875 | 1 500 | 2300 |
| 109 | .625-11 | 1 000 | 1 750 | 3700 |
| 110 | .750-10 | 1 250 | 2 000 | 5500 |

1 Recommended safe working load is one-fourth of the average ultimate capacity
2 Test in accordance with ASTM E488

TABLE II. TYPES 2 AND 3, DASH NUMBERS AND DIMENSIONS

| Type 2 Dash Numbers | Type 3 Dash Numbers | Thread Size UNC-2A | Anchor Dimensions | | | Average Ultimate Capacity [1,2] (Lbs.)(Minimum) |
|---|---|---|---|---|---|---|
| | | | Outside Diameter A (Minimum) | Overall Length B (Minimum) | Bolt Length C (Minimum) | |
| 201 | 301 | 250-20 | 500 | 750 | 2 500 | 500 |
| 202 | 302 | 375-16 | .625 | 1 000 | 3 500 | 1250 |
| 203 | 303 | 500-13 | 875 | 1 500 | 4 000 | 2300 |

1 Recommended safe working load is one-fourth of the average ultimate capacity
2 Test in accordance with ASTM E488

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:18Z
Check the source to verify that this is the current version before use.

2 2 MATERIAL

2 2 1 Caulking anchor expansion sleeves shall be made of lead or lead alloy

2 2 2 Type 1 caulking anchor expanders shall be made of brass, malleable iron, steel or hard zinc alloy

2.2 3 Type 2 caulking anchor expanders and washers shall be made of steel

2.2 4 Type 3 caulking anchor expanders shall be made of lead or lead alloy

2 2 5 Type 2 and 3 caulking anchor bolts and nuts shall be made of steel

2 2 6 Type 2 and 3 caulking anchor nuts shall be in accordance with ANSI/ASME B18 2 2

2.2 7 Type 2 caulking anchor washers shall be in accordance with ANSI/ASME B18 2 2

3 QUALITY CONFORMANCE PROVISIONS

3.1 The suppliers shall be responsible for those in process controls and inspections necessary to supply a product consistently conforming to the requirements of this document

3.2 Upon request, the supplier will certify with documented test/inspection evidence, that the parts supplied meet the requirements of this document

4 NOTES

4 1 Unless otherwise specified, all dimensions are in inches


4.2 Bolts are not included with Type I caulking anchors unless specified in the purchasing contract.

4.3 Packaging shall be in accordance with ASTM D3951

4.4 Each package of 25 to 100 caulking anchors shall contain an installation tool

4.5 The part identification number (PIN) shall consist of the basic commercial item description number followed by a dash number from Table I or Table II.

Example. AA1922-101




MILITARY INTERESTS

Custodians
Army AR
Navy - YD
Air Force - 99

Preparing Activity
DLA - IS

(Project 5340-2224)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:18Z
Check the source to verify that this is the current version before use.

# STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

INSTRUCTIONS

1 The preparing activity must complete blocks 1, 2, 3 and 8. In block 1, both the document number and revision letter should be given.
2 The submitter of this form must complete blocks 4, 5, 6 and 7.
3 The preparing activity must provide a reply within 30 days from receipt of the form.
NOTE: This form may not be used to request copies of documents, or to request waivers, or clarification of requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements.

| I RECOMMEND A CHANGE: | 1 DOCUMENT NUMBER A-A-1922A | 2 DOCUMENT DATE (YYMMDD) 950718 |
|---|---|---|

3 DOCUMENT TITLE **SHIELD, EXPANSION (CAULKING ANCHORS, SINGLE LEAD)**

4 NATURE OF CHANGE (Identify paragraph number and include proposed rewrite, if possible. Attach sheets if needed.)

5 REASON FOR RECOMMENDATION

[redacted]

8 PREPARING ACTIVITY DLA-IS

| a NAME | b TELEPHONE (Include Area Code) |
|---|---|
| Emelia Attoman | (1) Commercial (215) 697-6827 |
| **ADDRESS (Include Zip Code)**<br>Defense Industrial Supply Center<br>700 Robbins Avenue<br>Bldg. 3 (Code DISC-EED)<br>Philadelphia, PA 19111-5096 | **IF YOU DO NOT RECEIVE A REPLY WITHIN 45 DAYS, CONTACT**<br>Defense Quality and Standardization Office<br>5203 Leesburg Pike, Suite 1403<br>Falls Church, VA 22041<br>TELEPHONE (703) 756-2340 AUTOVON 289-2340 |

DD Form 1426, OCT 89 Previous editions are obsolete. 198/298

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:18Z
Check the source to verify that this is the current version before use.