INCH-POUND

A-A-2511A
May 16, 2002
SUPERSEDING
A-A-2511
April 1, 1987

COMMERCIAL ITEM DESCRIPTION

BRUSHES, WIRE, ROTARY, CUP, CRIMPED WIRE

The General Services Administration has authorized the use of this Commercial Item Description by all federal agencies.

1. SCOPE. This Commercial Item Description covers brushes for use with pneumatic or electric tools in the light duty removal of rust, scale, paint, or burrs from all types of metal surfaces.


2. CLASSIFICATION. Unless otherwise specified brushes shall conform to the following types and classes.

2.1 Type I. Brass.
Class 1. Threaded arbor.
Class 2. Unthreaded hole.

2.2 Type II. Stainless steel.
Class 1. Threaded arbor.
Class 2. Unthreaded hole.

2.3 Type III. High-carbon tempered steel.
Class 1. Threaded arbor.
Class 2. Unthreaded hole.

Crimped wire, cup brush.

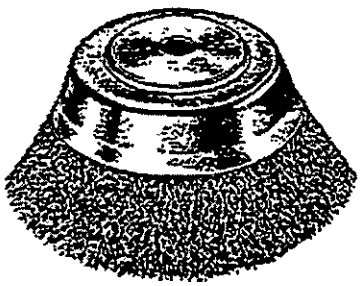

Beneficial comments, recommendations, additions, deletions, clarifications, etc. and any other data that may improve this document should be sent to: General Services Administration, Federal Supply Service, Hardware SuperStore, 6FEE, 1500 Bannister Rd., Bldg.# 6, Kansas City, Missouri 64131.

FSC 5130

Source: https://assist.dla.mil -- Downloaded: 202610-26T08:23Z
Check the source to verify that this is the current version before use.

3. SALIENT CHARACTERISTICS.

3.1 Design. The brushes shall be of the cup shaped design, and for use with pneumatic or electric portable grinders.

3.1.1 Body. The body shall be of steel overall and constructed in such a manner as to insure an even distribution of the wire throughout the brush to provide good balance for minimal vibration at max rated free speed R.P.M. Provisions shall be made for securely holding the fill wire in place and to prevent the wire from detaching due to flex during use or at rated free speed RPM. Where welded construction is used, the wire shall not be burned, broken, or affected in any way by the welding process.

3.1.2 Arbor. As specified the brush shall either possess a threaded arbor or an unthreaded through hole of specified size to fit a mandrel. The threaded arbor shall have a 5/8-11 NC female thread in accordance with the current version of Federal Standard H28. To minimize vibration the threaded arbor shall be mounted to the body in a manner that when brush is installed on a grinder the brush runs true. The unthreaded-hole type brush shall also have the hole centered in the brush to run true on a mandrel.

3.1.3 Wire. As specified, the crimped wire shall be of brass, stainless, or high carbon tempered steel. The crimped wire shall be comprised of at least four, single-amplitude, three; dimensional-crimps per inch of specified diameter and wire points (wire-density).

3.2 Identification marking. The tool shall be marked with the Maximum Safe Free Speed, (RPM or MSFS), the words "Wear Eye Protection", the manufacturer's name or identifying symbol and the state or country of manufacture, unless otherwise specified. All identification markings shall be etched, engraved, molded, or indented directly on the item's surface in such a manner that it remains clearly legible throughout the life of the item.

3.3 Workmanship. Details of workmanship shall be in accordance with the best commercial practices. Paints, coatings, plating, and finishes shall be smooth, adherent, continuous and not stained or discolored. External surfaces shall be free of tool and gouge marks, nicks, or other surface imperfections. The item shall be free from manufacturing workmanship defects (e.g. sharp or rough external edges, corners, or surfaces) and material workmanship defects (e.g. pits, rips, fins, burrs, tears, nodules, cracks, or blisters), which may adversely impact the item's serviceability, durability, safety, or appearance.

4. REGULATORY REQUIREMENTS.

4.1 Recovered materials. The supplier/manufacturer is encouraged to use recovered materials to the maximum extent practicable, in accordance with paragraph 23.403 of the Federal Acquisition Regulation (FAR).

4.2 Metric products. Products manufactured to metric dimensions will be considered on an equal basis with those manufactured using inch-pound units, provided they fall within the tolerances specified (using conversion tables contained in the latest revision of Federal Standard 376) and all other requirements of this document are met. If a product is manufactured to metric dimensions and those dimensions exceed the tolerances specified in the inch- pound units, a request should be made to the contracting officer to determine if the product is acceptable.

5. PRODUCT CONFORMANCE.

5.1 Safety. The brushes shall comply with American National Standards Institute (ANSI) standard B165.1-1991, Safety Requirements for the design, Care and Use of Power Driven Brushing Tools.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:23Z
Check the source to verify that this is the current version before use.

5.2 Product Conformance. The products provided shall meet the salient characteristics of this Commercial Item Description, conform to the supplier's own drawings, specifications, standards and quality assurance practices, and the same product and offered for sale in the commercial market. The government reserves the right to require proof of such conformance.

5.3 Responsibility for inspection. Unless otherwise specified, the supplier is responsible for the performance of all inspection requirements and may use any commercial facilities (including the supplier's own facilities) suitable for performance of the inspection requirements, unless disapproved by the Government. The Government reserves the right to perform any inspections deemed necessary to assure the item conforms to the specified requirements.

6. PACKAGING. Requirements of preservation, packing, packaging, and marking of packages shall be as specified in the contract or order.

7. NOTES. (This section contains information of a general or explanatory nature that is not mandatory.)

7.1 Addresses for obtaining copies of referenced documents:

Federal Acquisition Regulation (FAR): Government Printing Office, Superintendent of Documents, Washington, DC 20401-9371

GSA Specification Section (3FP-E), Suite 8100, 470 L'Enfant Plaza, SW, Washington, DC, 20407.

American National Standards Institute (ANSI), Washington, DC Headquarters, 1819 L Street, NW, 6th Fl., Washington, DC, 20036

7.2 National Stock Numbers (NSNs). The following NSNs list correspond to the types and classes specified in this CID. This list may not be indicative of all possible NSNs associated with this CID.

NSN	Type	Class	Brush Diameter (inches)	Wire diameter. (inches)	Wire fill type.	Trim length (inches)	Arbor hole size. (inches)	Wire point min.	Max RPM
5130-00-278-6634	III	1	4	0.0204	Crimped	.875-1.500	5/8-11	1850	6000
5130-00-293-2858	III	1	5	0.0204	Crimped	1-1.625	5/8-11	3500	5500
5130-00-203-4914	III	1	6	0.014	Crimped	1-1.750	5/8-11	4200	5000
5130-00-278-0821	III	1	6	0.035	Crimped	1-1.750	5/8-11	1700	5000
5130-00-705-5974	II	2	2	0.0118	Crimped	0.125-.375	3/8	2500	7000
5130-00-455-5418	III	1	2.75	0.009	Crimped	0.875	5/8-11	3800	6000
5130-00-278-1263	III	1	4	0.014	Crimped	1-1.500	5/8-11	4100	6000

7.3 Ordering data. The contract order should specify the following (in inches):

(A) Title, number, and date of Commercial Item Description.
(B) Type and class.
(C) Brush outside diameter.
(D) Wire diameter.
(E) Wire point minimum. (Wire density)
(F) Arbor hole size. (Threaded or unthreaded.)
(G) Wire trim-length.
(H) Max RPM. (Free-speed)
(I) Preservation, packing, and packaging of brushes required.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:23Z
Check the source to verify that this is the current version before use.

7.4 Key words. Crimped wire cup brushes.

MILITARY INTERESTS:

NONE: DoD has no registered interest in revisions and amendments to this Commercial Description until further notice.

Preparing Activity:

GSA - FSS

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:23Z
Check the source to verify that this is the current version before use.