INCH-POUND

A-A-2517A
May 16, 2002
SUPERSEDING
A-A-2517
April 1, 1987

COMMERCIAL ITEM DESCRIPTION

BRUSHES, WIRE, ROTARY, WHEEL, TWISTED TUFT

The General Services Administration has authorized the use of this Commercial Item Description by all federal agencies.


1. SCOPE. This Commercial Item Description covers brushes for use with pneumatic or electric power tools in the light duty removal of rust, scale, paint, or burrs from all types of metal surfaces.

2. CLASSIFICATION. Unless otherwise specified brushes shall conform to the following types.

2.1 Type I. Brass.

2.2 Type II. Stainless steel.

2.3 Type III. High-carbon tempered steel.

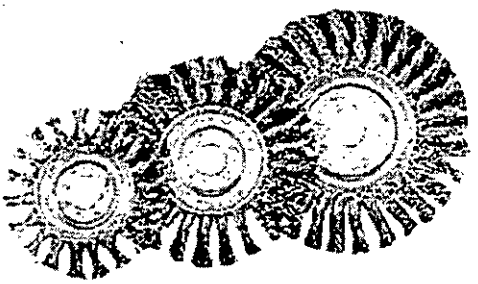

Twisted tuft wire wheel.

3. SALIENT CHARACTERISTICS.

3.1 Design. Wheel shaped design for use with portable or stationary power tools. Brushes shall have a narrow face width to be used individually or in multiple configurations on a common arbor. The brush shall possess an unthreaded arbor hole of specified size.

Beneficial comments, recommendations, additions, deletions, clarifications, etc. and any other data that may improve this document should be sent to: General Services Administration, Federal Supply Service, Hardware SuperStore, 6FEE, 1500 Bannister Rd., Bldg.# 6, Kansas City, Missouri 64131.

FSC 5130

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:23Z
Check the source to verify that this is the current version before use.

3.1.1 Body. The body shall be of steel overall and constructed in such a manner as to insure an even distribution of the wire throughout the brush to provide a balanced unit for minimal vibration at max rated free speed R.P.M. To also minimize vibration the arbor-hole shall be centered to insure the brush runs true. Provisions shall be made for securely holding the fill wire in place and to prevent the wire from detaching due to flex during use or at rated free speed RPM. Where welded construction is used, the wire shall not be burned, broken, or affected in any way by the welding process.

3.1.2 Wire. As specified, the crimped wire shall be of brass, stainless steel, or high carbon tempered steel of specified diameter and wire-points (density). Tufts shall consist of U-shaped fill wire passed through or around the retainer and twisted tightly. Brushes less than 10 inches in diameter, the wire shall have a left hand helix with at least one full turn and brushes 10 to 12 inches in diameter, the wire shall have at least 1-1/2 turns to prevent untwisting during use.

3.2 Identification marking. The tool shall be marked with the Maximum Safe Free Speed, (RPM or MSFS), the words "Wear Eye Protection", the manufacturer's name or identifying symbol and the state or country of manufacture, unless otherwise specified. All identification markings shall be etched, engraved, molded, or indented directly on the item's surface in such a manner that it remains clearly legible throughout the life of the item.

3.3 Workmanship. Details of workmanship shall be in accordance with the best commercial practices. The brushes shall be well constructed with a balanced distribution of wire fill. Paints, coatings, plating, and finishes shall be smooth, adherent, continuous and not stained or discolored. External surfaces shall be free of tool and gouge marks, nicks, or other surface imperfections. The item shall be free from manufacturing workmanship defects (e.g. sharp or rough external edges, corners, or surfaces) and material workmanship defects (e.g. pits, rips, fins, burrs, tears, nodules, cracks, or blisters), which may adversely impact the item's serviceability, durability, safety, or appearance.

4. REGULATORY REQUIREMENTS.

4.1 Recovered materials. The supplier/manufacturer is encouraged to use recovered materials to the maximum extent practicable, in accordance with paragraph 23.403 of the Federal Acquisition Regulation (FAR).

4.2 Metric products. Products manufactured to metric dimensions will be considered on an equal basis with those manufactured using inch-pound units, provided they fall within the tolerances specified (using conversion tables contained in the latest revision of Federal Standard 376) and all other requirements of this document are met. If a product is manufactured to metric dimensions and those dimensions exceed the tolerances specified in the inch- pound units, a request should be made to the contracting officer to determine if the product is acceptable.

5. PRODUCT CONFORMANCE.

5.1 Safety. The brushes shall comply with American National Standards Institute (ANSI) standard B165.1-1991, Safety Requirements for the design, Care and Use of Power Driven Brushing Tools.

5.2 Product Conformance. The products provided shall meet the salient characteristics of this Commercial Item Description, conform to the supplier's own drawings, specifications, standards and quality assurance practices, and the same product and offered for sale in the commercial market. The government reserves the right to require proof of such conformance.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:23Z
Check the source to verify that this is the current version before use.

5.3 Responsibility for inspection. Unless otherwise specified, the supplier is responsible for the performance of all inspection requirements and may use any commercial facilities (including the supplier's own facilities) suitable for performance of the inspection requirements, unless disapproved by the Government. The Government reserves the right to perform any inspections deemed necessary to assure the item conforms to the specified requirements.

6. PACKAGING. Requirements of preservation, packing, packaging, and marking of packages shall be as specified in the contract or order.

7. NOTES. (This section contains information of a general or explanatory nature that is not mandatory.)

7.1 Addresses for obtaining copies of referenced documents:

Federal Acquisition Regulation (FAR): Government Printing Office, Superintendent of Documents, Washington, DC 20401-9371

GSA Specification Section (3FP-E), Suite 8100, 470 L'Enfant Plaza, SW, Washington, DC, 20407.

American National Standards Institute (ANSI), Washington, DC Headquarters, 1819 L Street, NW, 6th Fl., Washington, DC, 20036

7.2 National Stock Numbers (NSNs). The following NSN list corresponds to the types specified in this CID. This list may not be indicative of all possible NSNs associated with this CID.

Rotary wheel wire brush.							
National Stock Numbers	Type	Outside brush diameter (inch)	Wire diameter.(inch)	Arbor hole (inch)	Wire trim length (inch)	Number of wire points.	Max safe free speed. (RPM)
5130-01-177-5609	II	3.00	.014	3/8	11/16	2,600	20,000
5130-00-405-9434	III	3.00	.0204	1/2	11/16	1,200	20,000
5130-01-054-6779	II	3.00	.0118	1/2	11/16	3,400	20,000
5130-01-028-5571	III	4.00	.0104	1/2	7/8	4,800	8,000
5130-00-569-1402	III	4.00	.0118	1/2	7/8	4,800	8,000
5130-01-023-4492	III	4.00	.014	3/8	7/8	2,800	18,000
5130-01-016-9020	III	4.00	.016	3/8	7/8	2,500	12,000
5130-00-277-9486	III	4.00	.016	1/2	7/8	2,500	8,000
5130-00-449-3799	III	6.00	.0118	1/2	1-3/8	7,200	6,000
5130-00-596-0673	III	6.00	.0118	5/8	1-3/8	7,200	6,000
5130-00-277-9487	III	6.00	.016	5/8	1-3/8	4,600	6,000
5130-00-293-0781	III	6.00	.023	5/8	1-3/8	2,000	6,000
5130-00-293-1983	III	6.00	.03	1/2	1-3/8	1,500	6,000
5130-01-022-4935	II	8.00	.016	5/8	1-11/16	6,500	4,500
5130-00-277-9488	III	8.00	.016	5/8	1-3/4	6,500	4,500
5130-00-293-2713	III	10.00	.0118	1-1/4	1-3/4	17,000	4,250
5130-01-054-6777	II	12.00	.016	1-1/4	2-3/4	10,500	3,600

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:23Z
Check the source to verify that this is the current version before use.

7.3 Ordering data. The contract order should specify the following (in inches):

(A) Title, number, and date of Commercial Item Description.
(B) Type and class.
(C) Brush outside diameter.
(D) Wire diameter.
(E) Arbor hole size.
(F) Wire trim-length.
(G) Wire point minimum. (Wire density)
(H) Max RPM. (Free-speed)
(I) Preservation, packing, and packaging of brushes, required.

7.4 Key words. Brushes, Wire, Rotary, Wheel, Twisted Tuft.

MILITARY INTERESTS:

NONE: DoD has no registered interest in revisions and amendments to this Commercial Description until further notice.

Preparing Activity:

GSA - FSS

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:23Z
Check the source to verify that this is the current version before use.