[INCH-POUND]
A-A-2879
August 29, 1995

COMMERCIAL ITEM DESCRIPTION

BAR, PINCH (STRAIGHT)

The General Services Administration has authorized the use of this Commercial Item Description as a replacement for the Type IX straight pinch bar specified in Federal Specification GGG-B-00101 for all federal agencies.

1. SCOPE. This description covers a straight pinch bar.

2. CLASSIFICATION. Not applicable.

3. SALIENT CHARACTERISTICS.

3.1 Material. The material used in the manufacture of the pinch bar shall be hot-rolled or cold-finished carbon or alloy steel, shall have good wear-resistant and shock-resistant qualities, and shall be capable of meeting the specified requirements.

3.2 Design and dimensions. The pinch bar shall meet the specified design and dimensional requirements.

3.3 Hardness. The cutting edge of the pinch bar shall have a Rockwell C hardness of 42 to 52 or a Brinell hardness of 390 to 512. The struck face shall have a maximum Rockwell C hardness of 45. Hardness shall be tested in accordance with ASTM E10 for Brinell or ASTM E18 for Rockwell. Hardness readings shall be taken from a distance of not less than 1/4 inch from the cutting edge and within 1/2 inch from the head of the striking end.

3.4 Finish. The finish on the pinch bar shall have a maximum surface roughness of 125 micro-inches. The finish shall be tested in accordance with ANSI B46.1. The pinch bar shall have a rust preventative coating.


3.5 Structure strength. The pinch bar shall not fracture or show any evidence of permanent set when one inch of the pointed end is secured or supported in a holder (e.g. vise) and a test load of 35 pounds is applied 2 $\pm$ 1/4 inches from the end of the handle in a direction perpendicular to the body.

3.6 Illustration. Except for the technical requirements (e.g., design and dimensions), the illustration herein is descriptive and is not intended to preclude the purchase of items otherwise conforming to the requirements of this description.

Beneficial comments, recommendations, additions, deletions, clarifications, etc., and any other data which may improve this document should be sent to: General Services Administration, Tools and Appliances Commodity Center, Washington, DC 20406.

FSC 5120

Source: https://assist.dla.mil -- Downloaded: 202640-26T08:26Z
Check the source to verify that this is the currentversion before use.

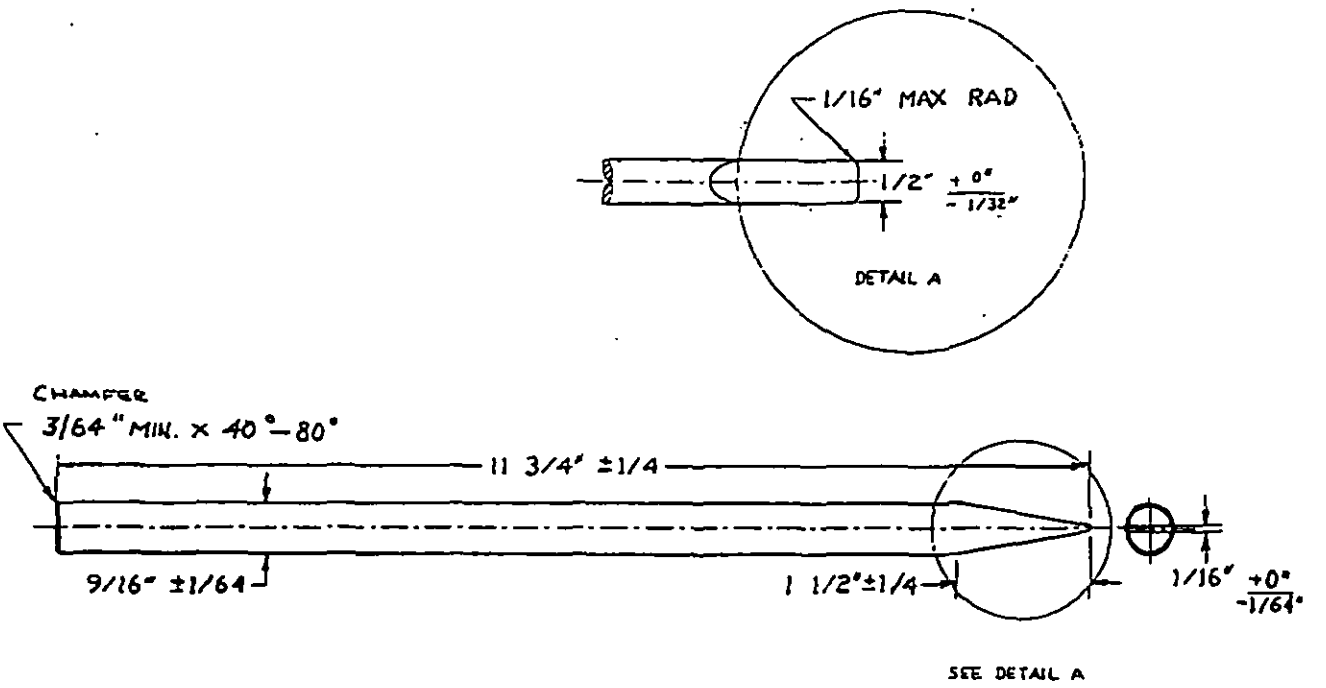

3.7 Identification Marking. The pinch bar shall be marked with the manufacturer's name or identifying symbol, and the state or country of manufacture, unless otherwise specified. All markings shall be engraved, etched, molded, or indented directly on the item's surface in such a manner that it remains clearly legible throughout the life of the item.

3.8 Safety warning. The pinch bar shall be stamped, labeled or otherwise marked with the following: WARNING - WEAR SAFETY GOGGLES.

3.9 Workmanship. Details of workmanship shall be in accordance with the best commercial practice. Paints, coatings, platings, and finishes shall be smooth, adherent, continuous, and not stained or discolored. External surfaces shall be free of tool and gouge marks, nicks, or other surface imperfections. The item shall be free of manufacturing workmanship defects (e.g., sharp or rough external edges, corners, or surfaces) and material workmanship defects (e.g., pits, rips, fins, burrs, tears, nodules, cracks, blisters) which may adversely impact the item's serviceability, durability, safety, or appearance.

4. REGULATORY REQUIREMENTS

4.1 Recovery materials. The offeror/contractor is encouraged to use recovered materials to the maximum extent practicable, in accordance with paragraph 23.403 of Federal Acquisition Regulation (FAR).

Source: https://assist.dla.mil -- Downloaded: 202640-26T08:26Z
Check the source to verify that this is the current version before use.

4.2 Metric products. Products manufactured to metric dimensions will be considered on an equal basis with those manufactured using inch-pound units, provided they fall within the tolerances specified (using conversion tables contained in the latest revision of Federal Standard 376) and all other requirements of this document are met. If a product is manufactured to metric dimensions and those dimensions exceed the tolerances specified in the inch-pound units, a request should be made to the Contracting Officer to determine if the product is acceptable.

5. QUALITY ASSURANCE PROVISIONS.

5.1 Contractor's certification. The contractor shall provide certification and maintain substantiating evidence that the items being offered for acceptance meet the requirements of this Commercial Item Description and conform to the manufacturer's drawings, specifications, standards, and quality assurance practices. The Government reserves the right to require proof of such conformance prior to first delivery and thereafter as provided for under the provisions of the contract.

5.2 Inspection responsibility. Unless otherwise specified, the contractor is responsible for the performance of all inspection requirements and may use any commercial facilities (including the contractor's own facilities) suitable for performance of the inspection requirements, unless disapproved by the Government. The Government reserves the right to perform any inspections deemed necessary to assure the item conforms to the specified requirements.

5.3 Bid sample(s). When a bid sample requirement is specified in the solicitation, the bid sample(s) shall be inspected for all salient characteristics. A failure of any bid sample to meet the salient characteristics shall be cause for rejection.

5.4 First article sample(s). When a first article requirement is specified in the contract, the first article sample(s) shall be inspected for all salient characteristics. A failure of any first article sample to meet the salient characteristics shall be cause for rejection.

6. PACKAGING.

6.1 Preservation, packing, and marking shall be as specified in the contract or order.

7. NOTES. (This section contains information of a general or explanatory nature that is not mandatory.)

7.1 Addresses for obtaining copies of referenced documents.

Federal Specifications: Federal Supply Service Bureau, Specification Section, Suite 8100, 470 L'Enfant Plaza, SW, Washington, DC 20407.

Federal Acquisition Regulations (FAR): Government Printing Office, Superintendent of Documents, Washington, DC 20402-9371.

ASTM: American Society for Testing Materials, 1916 Race St., Philadelphia, PA 19103.

ANSI: American National Standards Institute, 11 West 42nd St., New York, NY 10036.

Source: https://assist.dla.mil -- Downloaded: 202640-26T08:26Z
Check the source to verify that this is the currentversion before use.

ANSI/ASQC: American Society for Quality Control, P. O. Box 3005, 611 East Wisconsin Ave., Milwaukee, WI 43201-4606.

7.2 Ordering data. Purchasers should select the preferred options permitted herein and should include the following information in procurement documents:

(a) Title, number and date of this Commercial Item Description.

(b) When applicable, the appropriate NSN.

(c) When applicable, the specific type, styles, classes, sizes, etc., as specified in the Commercial Item Description.

(d) If bid samples are required and the number of samples.

(e) If first article samples are required and the number of samples.

(f) If lot sampling inspection is required and the applicable lot sampling requirements.

For example:

Sampling for inspection and testing. Sampling for inspection (both examinations and testing) shall be in accordance with ANSI/ASQC Z1.4.

Examinations. Each sample pinch bar shall be examined for all salient characteristics. The Inspection Level shall be Level I with an Acceptable Quality Level (AQL) of 4.0 expressed in terms of defects per hundred units.

Testing. Each sample pinch bar shall be tested for all salient characteristics. The Inspection Level shall be S-3 with an Acceptable Quality Level (AQL) of 1.5 expressed in terms of defects per hundred units.

(g) What preservation, packaging, and marking are required.

7.3 National Stock Number (NSNs). The following NSN is associated with this CID. This list may not be indicative of all possible NSNs associated with this CID.

5120-00-526-6044

MILITARY INTERESTS:

Custodians

Army - GL
Air Force - 99

Review Activity:

Air Force - 84

Preparing Activity

GSA - FSS

DoD Project 5120-0027

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:26Z
Check the source to verify that this is the current version before use.