
MILITARY SPECIFICATION SHEET

CRYSTAL UNIT, QUARTZ, CR-106/U

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The complete requirements for acquiring the crystal unit described herein shall consist of this specification and the latest issue of MIL-C-3098.

Pertinent characteristics: 10.5 to 11.5 MHz; fundamental; noncontrolled; antiresonance.

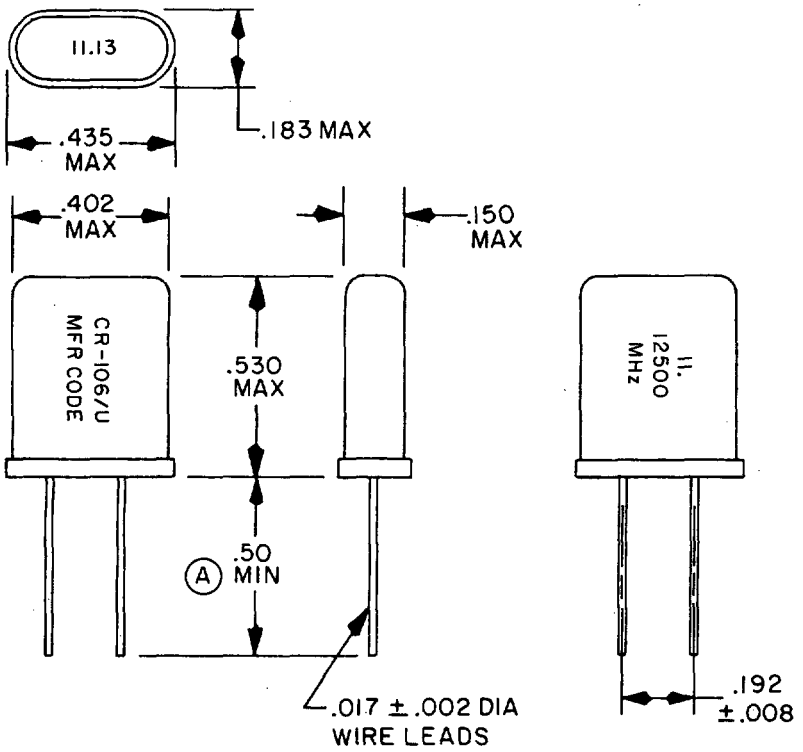

INCHES	MM
.002	.05
.008	.20
.017	.43
.150	3.81
.183	4.65
.192	4.88
.402	10.21
.435	11.05
.50	12.7
.530	13.46

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only and are based upon 1 inch = 25.4 mm.
3. The type designator, frequency, and manufacturer's code shall be not less than .038 (.97 mm) in height and not less than .027 (.69 mm) in width.

FIGURE 1. Crystal unit - CR-106/U.

Ⓐ denotes changes

FSC 5955

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T16:43Z
Check the source to verify that this is the current version before use.

Ⓐ TABLE I. Requirements.

Requirement	Specified value or condition
Holder	HC-18/U or HC-43/U (MIL-H-10056/9)
Dimensions	See figure 1
Frequency range	10.5 to 11.5 MHz, inclusive
Frequency tolerance	±50 ppm
Capacitance, load	32.0 ±0.5 pF
Mode of oscillation	Fundamental
Operating temperature range	-55°C to +105°C, inclusive
Temperature run-operating range	Method A
Government reference standard test set	TS-330/TSM
Rated drive level	5.0 ±1.0 mW
Calibration values:	
Equivalent resistance	13 ohms
Crystal current	20 mA
Capacitance, shunt	7 pF, maximum
Equivalent resistance	25 ohms, maximum
Shock:	
Frequency change permitted	±5 ppm
Equivalent resistance change permitted	±10 percent
Vibration: 1/	
Frequency change permitted	±5 ppm
Equivalent resistance change permitted	±10 percent
Aging:	
Frequency change permitted	±5 ppm

1/ Method 201 of MIL-STD-202

Custodians:
Army - ER
Navy - EC
Air Force - 85

Review activities:
Air Force - 11, 85
DLA - ES

User activities:
Air Force - 17, 19

Agent:
DLA - ES

Preparing activity:
Army - ER

(Project 5955-0623-16)

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T16:43Z
Check the source to verify that this is the current version before use.