MILITARY SPECIFICATION SHEET

CAP, ELECTRICALLY INSULATING, POLYOLEFIN, MELTABLE INNER WALL, HEAT SHRINKABLE

The complete requirements for procuring the insulating caps described herein shall consist of this document and the issue in effect of MIL-K-81786(AS).

(1) OUTER JACKET:

Heat-shrinkable, flexible, flame-retarded, irradiated polyolefin.

(2) INNER WALL:

Meltable, modified polyolefin. Closed portion shall not open upon reheating.

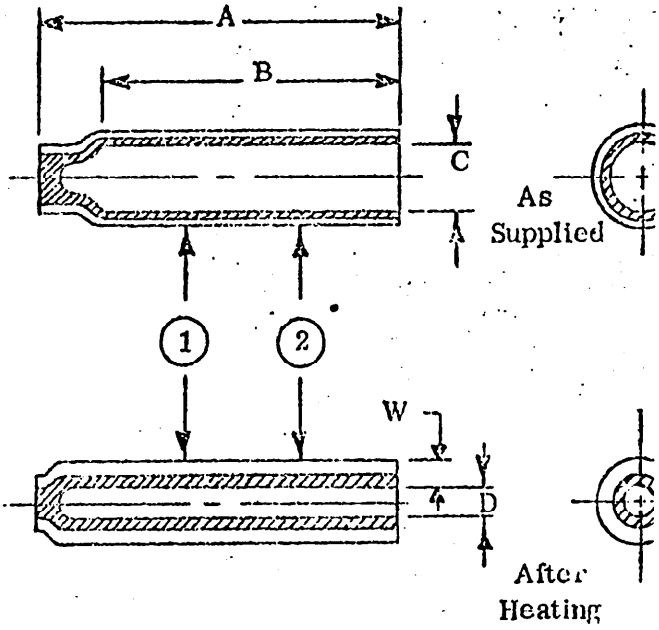


Figure 1

REQUIREMENTS: The insulating caps shall conform to the requirements of AMS 3634

FSC-4940

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T06:09Z
Check the source to verify that this is the current version before use.

Sizes - See table I
Type - tubular, closed end.
Color - Black

TABLE I

Part No.	Dimensions (inches)				
	As Supplied			After Shrinking	
	A Nominal	B Nominal	C Min	D Max	W Nominal
M81786 /10-1	1.00	.81	.18	.06	.05
M 81786 /10-2	1.12	.93	.25	.08	.06
M 81786 /10-3	1.25	1.00	.37	.09	.06
M 81786 /10-4	1.50	1.10	.50	.09	.07

☆ U. S. GOVERNMENT PRINTING OFFICE: 1972-714-167/8041

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T06:09Z
Check the source to verify that this is the current version before use.