
FSC 5310

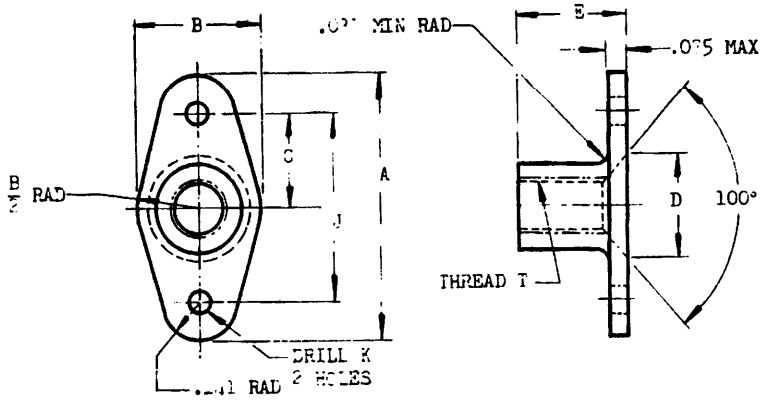

SIZE	A	B MAX	(a) C NOM	D DIA MAX	D DIA MIN	(b) E MAX	J ±.002	K +.005 -.000 DIA
NO. 8	.969	.453	.3—	.4[illegible]0	.360	.359	.688	.098
NO. 10	.969	.453	.3[illegible]	.4[illegible]6	.406	.406	.688	.098
1/4	1.281	.656	.500	.5[illegible]	.5[illegible]	.45[illegible]	1.000	.098
5/16	1.281	.766	.500	.701	.6[illegible]	.53[illegible]	1.000	.130

④

DASH NUMBERS ~~STEEL~~	DASH NUMBERS ALUMINUM ALLOY	THREAD T
~~P832~~	DF832	NO. 8-32 NC-2B
~~P1032~~	DF1032	NO. 10-32 NF-3B
~~P428~~	DF428	1/4 -28UNF-3B
~~P524~~	DF524	5/16-24UNF-3B

(a) THE CENTER OF THE TAPPED HOLE SHALL NOT DEVIATE IN ANY DIRECTION FROM THE CENTER OF THE PLATE NUT AS DETERMINED BY THE RIVET HOLES BY MORE THAN .005.

(b) MINIMUM E NOT SPECIFIED. LIMITED ONLY BY STRENGTH REQUIREMENT OF SPECIFICATION.

ADD A AFTER DASH NO. FOR NUTS HAVING NON-METALLIC INSERTS.

ADD B AFTER DASH NO. FOR NUTS FABRICATED ENTIRELY FROM METAL.

EXAMPLES OF PART NOS: AN373F428 = 1/4-28 STEEL NUT, EITHER ALL METAL OR WITH NON-METALLIC INSERT.
AN373DF428 = 1/4-28 ALUMINUM ALLOY NUT, EITHER ALL METAL OR WITH NON-METALLIC INSERT.
AN373F428A = 1/4-28 STEEL NUT WITH NON-METALLIC INSERT.
AN373DF428B = 1/4-28 ALUMINUM ALLOY ALL METAL NUT.

DIMENSIONS IN INCHES. UNLESS OTHERWISE SPECIFIED, TOLERANCES: DECIMALS ±.015, ANGLES ±1/2°.

FOR INSTALLATION INSTRUCTIONS SEE MS33588.

③ INACTIVE FOR NEW DESIGN AFTER 7 APRIL 1967.
USE MS21049.

③FOR INTERCHANGEABILITY RELATIONSHIP: SEE MS21049

④ CANCEL STEEL NUTS ONLY

PROCUREMENT SPECIFICATION	AIR FORCE-NAVY AERONAUTICAL STANDARD	AN373
AN-N-5	NUT - SELF LOCKING, PLATE, [illegible], 250°F	

APPROVED 14 Apr 49 REVISED ① 4 Oct 50 ② 17 Feb 59 ③ 7 Apr 67 ④ 21 MAR 72

NOTICE.—When Government drawings, specifications, or other data are used for any purpose other than in connection with a definitely related Government procurement operation, the United States Government thereby incurs no responsibility, nor any obligation whatsoever; and the fact that the Government may have formulated, furnished, or in any way supplied the said drawings, specifications, or other data is not to be regarded by implication or otherwise as in any manner licensing the holder or any other person or corporation, or conveying any rights or permission to manufacture, use, or sell any patented invention that may in any way be related thereto.

NOTE.—This drawing was approved by joint action of the Air Force and Navy Department as the Air Force-Navy standard for this product. This drawing supersedes all antecedent standard drawings for the same product and shall become effective for the procurement of aeronautical supplies, or for use in new design, not later than six months after the latest date of approval shown.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T14:15Z
Check the source to verify that this is the current version before use.