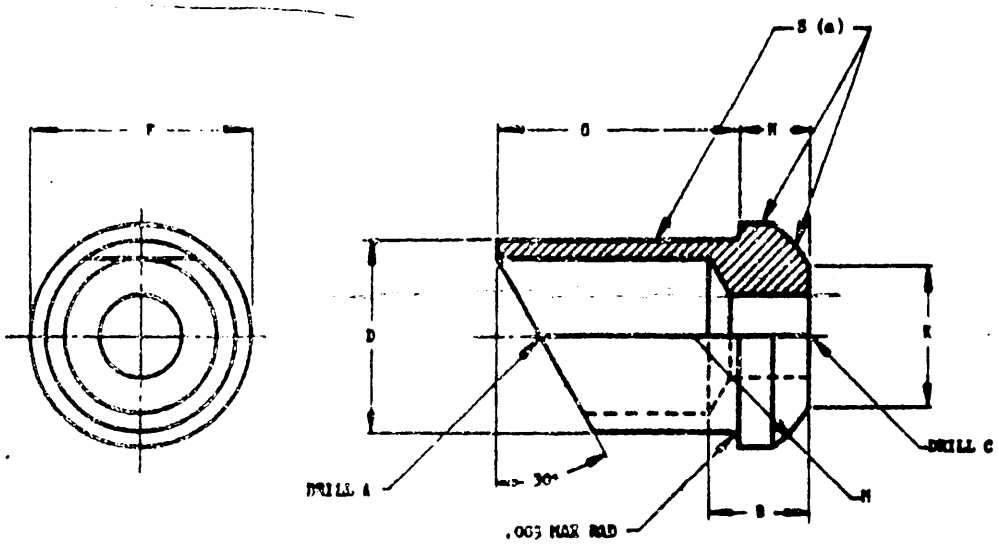


	DASH NO. BRASS	DASH NO. CORROSION RESISTANT STEEL	DASH NO. NICKEL COPPER ALLOY	TUBE OD	A DIA	B	C DIA	D +.000 -.004 DIA	F +.000 -.004 DIA	G	N	K DIA	R SPHER RAD	WEIGHT MAX (5) BRASS	WEIGHT MAX (5) CORROSION RESISTANT STEEL	WEIGHT MAX (5) NICKEL COPPER ALLOY
	2	G2	N2	.125	.1285	.150	.076	.165	.265	.375	.125	.125	.141			
(c)	3			.188	.191		.140	.250	.320	.438		.172	.172			
	4			.250	.257	.188	.157	.312	.375	.500		.203	.203			
	5			.312	.323	.219	.219	.375	.437	.594	.156	.266	.266			
(d)	6			.375	.386		.281	.469	.547	.719		.328	.328			
	8			.500	.516	.250	.406	.594	.672	.906	.188	.453	.422			
	10			.625	.641	.281	.531	.719	.844	1.031	.219	.594	.548			
(b)	12			.750	.766	.312	.625	.859	1.000	1.188	.250	.688	.689			
	16			1.000	1.016	.500	.875	1.125	1.375	1.438	.375	.938	.811			

(a) SURFACES "S" MUST RUN TRUE WITH EACH OTHER WITHIN .002 FULL INDICATOR READING.

(b) INACTIVE FOR DESIGN AFTER 23 NOV 1942.

(c) INACTIVE FOR DESIGN AFTER 9 MAY 1947 EXCEPT FOR OXYGEN SYSTEMS AND ENGINE PRIMER LINES.

(d) DASH NOS. 5, 6, 8, 10 ARE NOT TO BE USED ON ENGINE PRIMER LINES.

(5) MATERIAL: BRASS; BARS, SHAPES OR FORGINGS.
CORROSION RESISTANT STEEL; BARS, SHAPES OR FORGINGS.
NICKEL COPPER ALLOY; BARS, SHAPES OR FORGINGS.
SEE PROCUREMENT SPECIFICATION.

FINISH: SEE PROCUREMENT SPECIFICATION.

ADD P BEFORE DASH NO. FOR CADMIUM PLATED BRASS ONES AND FOR CADMIUM PLATED NICKEL-COPPER ALLOY ONES.

EXAMPLES OF PART NOS.: AN800-2 = CONE-UNION, BRASS, FOR .125 (2/16) TUBING OD.
AN800P2 = CONE-UNION, BRASS, CADMIUM PLATED, FOR .125 (2/16) TUBING OD.
AN800G2 = CONE-UNION, CORROSION RESISTANT STEEL, FOR .125 (2/16) TUBING OD.
AN800N2 = CONE-UNION, NICKEL-COPPER ALLOY, FOR .125 (2/16) TUBING OD.
AN800PN2 = CONE-UNION, NICKEL-COPPER ALLOY, CADMIUM PLATED, FOR .125 (2/16) TUBING OD.

(5) BREAK ALL SHARP EDGES AND REMOVE ALL MACHINE BURRS AND SLIVERS WHICH MIGHT BECOME DISLODGED UNDER USAGE.

(5) DIMENSIONS IN INCHES. UNLESS OTHERWISE SPECIFIED, TOLERANCES: DECIMALS ±.030, ANGLES ±1/2°.

APPROVED 23 Nov 42 REVISED (1) 16 Dec 42 (2) 26 Aug 44 (3) 9 May 47 (4) 3 Oct 47 (5) 31 Jan 51

PROCUREMENT SPECIFICATION	AIR FORCE-NAVY AERONAUTICAL STANDARD	AN800
MIL-P-6001	CONE - UNION	

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T14:16Z
Check the source to verify that this is the current version before use.