FED. SUP CLASS
5340

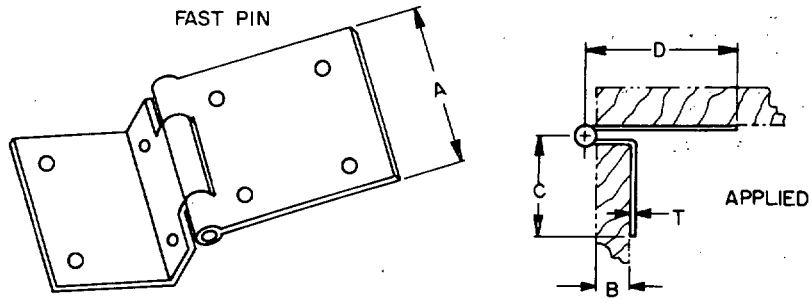


TABLE I. DASH NUMBERS AND DIMENSIONS

A	NOMINAL SIZE	±.06	1.50	1.50	1.50	1.50
B	OFFSET	±.03	.50	.62	.75	.87
C	LENGTH	±.06	1.50	1.37	1.25	1.12
D	LENGTH	±.06	2.19	2.19	2.19	2.19
T	THICKNESS	±.005	.075	.075	.075	.075
	NUMBER OF SCREW HOLES	MIN	7	7	8	8
1/	SIZE OF SCREWS	(REF)	#7 X 1/2	#7 X 5/8	#7 X 5/8	#7 X 3/4
	TYPE		DASH NUMBER	DASH NUMBER	DASH NUMBER	DASH NUMBER
	CREST		2	4	6	8
A	NOMINAL SIZE	±.06	2.00	2.00	2.00	2.00
B	OFFSET	±.03	.50	.62	.75	.87
C	LENGTH	±.06	2.00	1.87	1.75	1.62
D	LENGTH	±.06	2.69	2.69	2.69	2.69
T	THICKNESS	±.005	.007	.007	.077	.077
	NUMBER OF SCREW HOLES	MIN	7	7	8	8
1/	SIZE OF SCREWS	(REF)	#8 X 1/2	#8 X 5/8	#8 X 5/8	#8 X 3/4
	TYPE		DASH NUMBER	DASH NUMBER	DASH NUMBER	DASH NUMBER
	CREST		12	14	16	18

1/ SEE NOTE 1

Ⓑ ENTIRE STANDARD REVISED

APPROVED 24 FEB 61 REVISED Ⓑ 21 DEC 87

USER ACTIVITIES:
ARMY — AV, ME
NAVY — MC

REVIEWER ACTIVITIES:
ARMY — EA, GL
NAVY — SH
AIR FORCE — 82
DLA — IS

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.
This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document when applicable.

AMSC N/A

P.A.	INTERNATIONAL INTEREST	TITLE	MILITARY STANDARD
ARMY — AR Other Cust NAVY — YD AIR FORCE-99		HINGE, STRAP (OFFSET)	MS27973
PROCUREMENT SPECIFICATION: ANSI A156.1	SUPERSEDES: SHHX1, MQ130A		PAGE 1 OF 2

DD FORM 1 MAY 73 672-1 (COORDINATED) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE 5340-1726

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T16:54Z
Check the source to verify that this is the current version before use.

FED. SUP CLASS
5340

REQUIREMENTS:

1. MATERIAL:
   BODY: STEEL, IN ACCORDANCE WITH ASTM A506, LOW CARBON, COLD ROLLED.
   PIN: BRASS, IN ACCORDANCE WITH QQ-B-626, COMPOSITION 11, HARD OR CORROSION-RESISTANT STEEL, IN ACCORDANCE WITH ASTM A666.

2. PROTECTION COATING: CADMIUM PLATED IN ACCORDANCE WITH QQ-P-416, TYPE II, CLASS 2 OR ZINC PLATED IN ACCORDANCE WITH ASTM B633, TYPE II, CLASS Fe/Zn 13 OR MIL-C-81562, TYPE II, CLASS 2.

3 PART NUMBER: THE PART NUMBER SHALL CONSIST OF THE BASIC MS NUMBER FOLLOWED BY A DASH NUMBER TAKEN FROM TABLE I.

EXAMPLE: MS27973-2
- -2 — DASH NUMBER
- MS27973 — BASIC MS NUMBER

MS27973-2 INDICATES: HINGE, BUTT, CHEST (OFFSET); NOMINAL SIZE, 1.50; OFFSET, .50; LENGTH, 1.50; LENGTH, 2.19; THICKNESS, .075.

NOTES:

1. SCREWS: HINGES ARE FURNISHED WITH WOOD SCREWS. THE SIZES SPECIFIED ARE THOSE NORMALLY FURNISHED BY THE SUPPLIER.

2. ALL DIMENSIONS ARE IN INCHES UNLESS OTHERWISE SPECIFIED.

3. IN THE EVENT OF A CONFLICT BETWEEN THE TEXT OF THIS STANDARD AND THE REFERNECES CITED HEREIN, THE TEXT OF THIS STANDARD SHALL TAKE PRECEDENCE.

4. REFERENCED GOVERNMENT (OR NON-GOVERNMENT) DOCUMENTS OF THE ISSUE LISTED IN THAT ISSUE OF THE DEPARTMENT OF DEFENSE INDEX OF SPECIFICATIONS AND STANDARDS (DODISS) SPECIFIED IN THE SOLICITATION FORM A PART OF THIS STANDARD TO THE EXTENT SPECIFIED HEREIN.

USER ACTIVITIES:
ARMY — AV, ME
NAVY — MC

REVIEWER ACTIVITIES:
ARMY — EA, GL
NAVY — SH
AIR FORCE — 82
DLA — IS

APPROVED 24 FEB 61 REVISED (B) FOR CHANGES SEE PAGES 1 AND 2

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document when applicable.

P.A.	INTERNATIONAL INTEREST	TITLE	MILITARY STANDARD
ARMY — AR Other Cust NAVY — YD AIR FORCE-99		HINGE, STRAP (OFFSET)	MS27973
PROCUREMENT SPECIFICATION ANSI — A156.1	SUPERSEDES: SHHXI, MQI30A		PAGE 2 OF 2

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T16:54Z
Check the source to verify that this is the current version before use.