

FED. SUP CLASS
2330

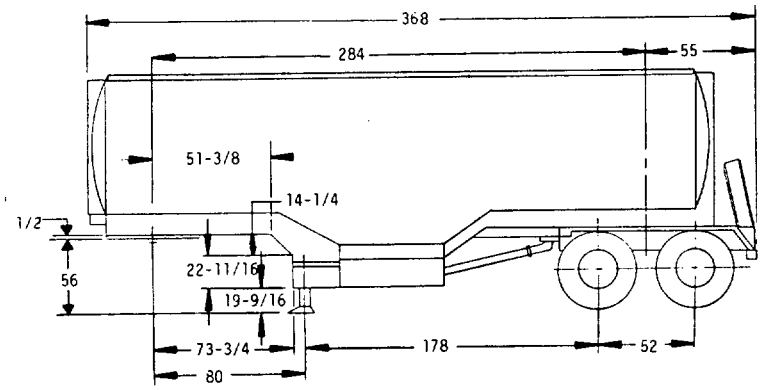

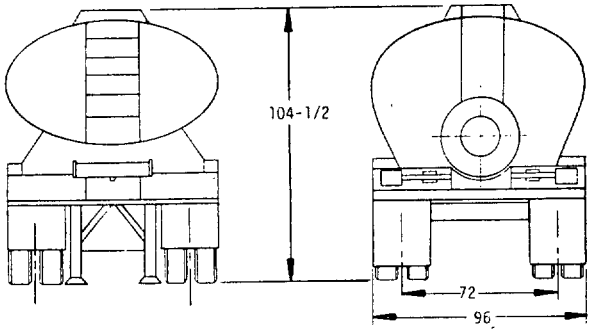

USER ACTIVITIES:

REVIEWER ACTIVITIES:

This military standard is approved for use by the US Army Tank-Automotive Command, Department of the Army, and is available for use by all Departments and Agencies of the Department of Defense.

DISTRIBUTION STATEMENT A. Approved for public release; distrubution is unlimited.

APPROVED 3 MAY 85 REVISED

MS PART NO.	ENGINEERING DWG NO
MS 52154-1	8750002

P. A ARMY-AT Other Cust	INTERNATIONAL INTEREST	TITLE
		SEMITRAILER, TANK: 5000 GAL, BULK HAUL, SELF LOAD/UNLOAD, M967

MILITARY STANDARD

MS52154(AT)

PROCUREMENT SPECIFICATION	SUPERSEDES:
MIL-S-62180	

SHEET 1 OF 2

DD FORM 1 MAY 73 672-1 LIMITED COORDINATION

PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T18:21Z
Check the source to verify that this is the current version before use.

FED. SUP CLASS
2330

VEHICLE CHARACTERISTICS

PRIME MOVER: TRUCK, TRACTOR, 5 TON, 6 X 6 M818 SERIES

CURBWEIGHT:
W/O PAYLOAD 14,040 LBS

PAYLOAD:
(FUEL @ 6.79 LBS/GAL)
LOADED (3800) 25,800 LBS

GROSSWEIGHT:
W/PAYLOAD
LOADED (3800 GAL) 39,840 LBS

GROSSWEIGHT OF TRACTOR (M818), SEMITRAILER, W/O PAYLOAD 34,380
GROSSWEIGHT OF TRACTOR (M818), SEMITRAILER, W/PAYLOAD (5000 GAL) 69,780

WEIGHT DISTRIBUTION (SEMITRAILER W/M818)

	W/O PAYLOAD
FRONT AXLE, TRACTOR M818	10,460
REAR BOGIE, TRACTOR M818	14,200
KINGPIN, SEMITRAILER	4,320
REAR BOGIE, SEMITRAILER	9,720
	(W/5000 GAL PAYLOAD)
FRONT AXLE, TRACTOR M818	10,440
REAR BOGIE, TRACTOR M818	30,120
KINGPIN, SEMITRAILER	20,180
REAR BOGIE, SEMITRAILER	29,220

CENTER OF GRAVITY:	VERTICAL	HORIZONTAL FROM KINGPIN
EMPTY	41	210-1/2
LOADED	65	186-1/4

DEPARTURE ANGLE: 60°

FORDING DEPTH: 24 IN

MILITARY VEHICLE CLASSIFICATION:

	EMPTY	LOADED	HIGHWAY
M818&M967	13	25	29
M967	6	18	21

ENGINE:
TYPE (ONAN) 4 CYL, 4 CYCLE, DIESEL, AIR COOLED
HORSEPOWER 27.5
BORE 3.25
STROKE 3.625

DESCRIPTION:
THE M967 IS A 5000 GALLON BULK HAUL, SELF LOAD/UNLOAD SEMITRAILER EQUIPPED PRIMARILY FOR BULK DELIVERY OF FUEL. THE M967 HAS A 4 CYLINDER DIESEL ENGINE AND 4-INCH CENTRIFUGAL PUMP.

THE TRAILER HAS A STAINLESS STEEL, SINGLE COMPARTMENT TANK OF 5000 GALLON CAPACITY, PLUS 3% CAPACITY FOR PRODUCT EXPANSION. THE CHASSIS IS OF WELDED STEEL CONSTRUCTION AND EQUIPPED WITH FULL TANDEM AXLES AND MANUALLY OPERATED LANDING GEAR.

THE M967 IS EQUIPPED WITH PRESSURE AND VACUUM VENTS, HOSE TROUGHS, SEALED MAN HOLE, CALIBRATED GAUGE, BULK FUEL HOSES, PORTABLE GROUNDING ROD, STATIC GROUND REEL, AND SPARE TIRE. A LADDER IS PROVIDED AT THE FRONT OF THE SEMITRAILER FOR ACCESS TO THE TOP MANHOLE. A VAPOR RECOVERY SYSTEM, REQUIRED IN CERTAIN AREAS, CAN BE INSTALLED ON THE M967.

SHIPPING DATA:

CUBIC FEET	2200
SQUARE FEET	250
LENGTH	368 IN
WIDTH	96 IN
HEIGHT	104-1/2 IN
HEIGHT (REDUCIBLE BY DEFLATING TIRE)	102 IN

TIRES:

SIZE	11.00 X 20 -12 PLY
TREAD	NDCC
QUANTITY	8 + 1 SPARE
PRESSURE	75 TO 95 PSI

ELECTRICAL SYSTEM: ENGINE

TYPE	12 V DIRECT CURRENT
ALTERNATOR	65 AMPS, BELT DRIVE
BATTERY (2)	12 V, CONNECTED IN PARALLEL

ELECTRICAL SYSTEM: - VEHICLE
VOLTAGE 24 VOLT

AXLE TYPE: FULL FLOATING TANDEM
18,000 LB CAPACITY

BRAKES: SERVICE QTY; 4 ACTUATION; AIR/WEDGE (2 PER AXLE END) 75-95 PSI

LANDING LEG: ADJUSTABLE, CRANK OPERATED

NOTES:
1. DIMENSIONS ARE IN INCHES AND ARE SHOWN FOR ENGINEERING REFERENCE ONLY.
2. REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATIONS.
3. THIS VEHICLE SHALL BE IN ACCORDANCE WITH REFERENCED ENGINEERING DRAWINGS, COPIES OF WHICH MAY BE OBTAINED FROM: US ARMY TANK-AUTOMOTIVE COMMAND, WARREN MICH. 48090.

APPROVED 3 MAY 85 REVISED

MS PART NO.	ENGINEERING DWG NO
MS 52154-1	8750002

P.A. ARMY-AT
Other Cust

TITLE
SEMITRAILER, TANK: 5000 GAL. BULK HAUL, SELF LOAD/UNLOAD, M967.

MILITARY STANDARD
MS52154(AT)

PROCUREMENT SPECIFICATION
MIL-S-62180

SUPERSEDES:

SHEET 2 OF 2

DD FORM 1 SEP 57 672-1 (LIMITED COORDINATION)

PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE.

This military standard is approved for use by the US Army Tank-Automotive Command, Department of the Army, and is available for use by all Departments and Agencies of the Department of Defense.
DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T18:21Z
Check the source to verify that this is the current version before use.