
FED. SUP CLASS
4820

NOTICE. When Government drawings, specifications, or other data are used for any purpose other than in connection with a definitely related Government procurement operation, the United States Government thereby incurs no responsibility, nor any obligation whatsoever; and the fact that the Government may have formulated, furnished, or in any way supplied the said drawings, specifications, or other data is not to be regarded by implication or otherwise as in any manner licensing the holder or any other person or corporation, or conveying any rights or permission to manufacture, use, or sell any patented invention that may in any way be related thereto.

FED. SUP CLASS. 4820

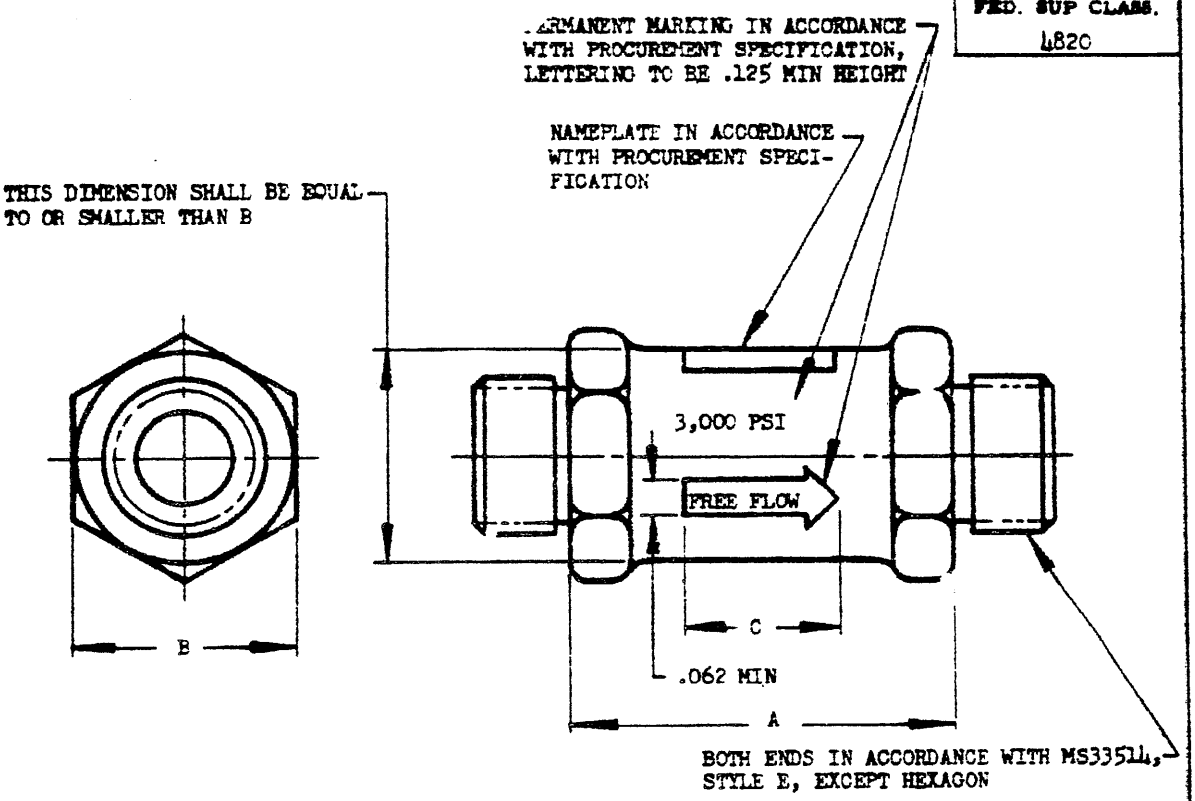

MS PART NO.	FIIN	TUBE OD	RATED FLOW GPM	A ±.031	B (a) +.003 -.006	C MIN
MS28890-4		1/4	1.2	1.531	.688	.875
MS28890-5		5/16	2.3	1.750	.813	1.000
MS28890-6		3/8	3.5			
MS28890-8		1/2	6.0	2.219	1.063	
MS28890-10		5/8	10.5	2.406	1.125	
MS28890-12		3/4	16.0	2.750	1.438	
MS28890-16		1	29.0	3.312	1.688	

DIMENSIONS IN INCHES.

(B) (a) AT OPTION OF MANUFACTURER, DIMENSION B MAY BE MADE TO CONFORM TO DIMENSION E OF STANDARD MS33514.

THIS STANDARD TAKES PRECEDENCE OVER DOCUMENTS REFERENCED HEREIN.
REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATIONS FOR BID.
THIS DOCUMENT HAS BEEN PROMULGATED BY THE DEPARTMENT OF DEFENSE AS THE MILITARY STANDARD TO LIMIT THE SELECTION OF THE ITEM, PRODUCT, OR DESIGN COVERED HEREIN IN ENGINEERING, DESIGN, AND PROCUREMENT. THIS STANDARD SHALL BECOME EFFECTIVE NOT LATER THAN 90 DAYS AFTER THE LATEST DATE OF APPROVAL SHOWN.

APPROVED 18 Oct 55 REVISED (A) 15 Jun 56 (B) 5 Oct 56

CUSTODIANS	OTHER INT.
Navy - BuAer Air Force	A - N - AF -

MILITARY STANDARD

VALVE, HYDRAULIC CHECK, 3,000 PSI. F ARELESS, TYPE I
(B) SYSTEMS

MS28890 (ASG)

Procurement Specification
MIL-V-5524

SUPERSEDES:

SHEET 1 OF 1

Source: https://assist.dla.mil -- Downloaded: 20260-23T17:00Z
Check the source to verify that this is the current version before use.