
FED. SUP CLASS
4730

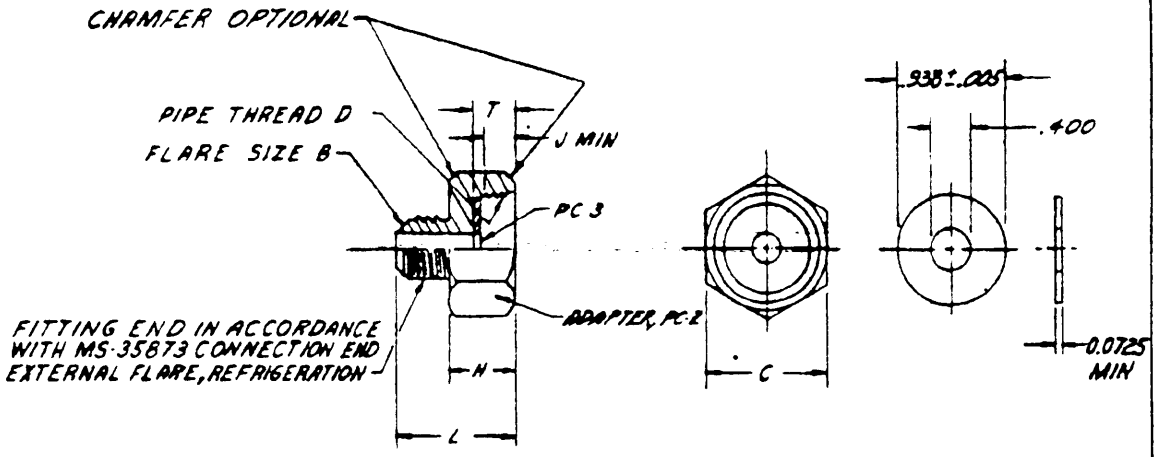

ADAPTER ASSEMBLY, REFRIGERANT CYLINDER, PC 1 GASKET, PC 3

TABLE I - DIMENSIONS

ADAPTER PC 2							
FLARE SIZE B	PIPE THREAD D	STRAIGHT PIPE THREAD PITCH DIA	HEX C ±.004	LENGTH H	THREAD DEPTH J MIN	DEPTH T	LENGTH L ±.030
1/4	3/4-14 NPSM	.9958 - .9889	1.250	.620	.380	.440	1.250
3/8	3/4-14 NPSM	.9958 - .9889	1.250	.620	.380	.440	1.250

(C) TABLE II DASH NUMBERS

PIECE NO	PART	DASH NO.
1	ADAPTER, 1/4 FLARE SIZE, WITH GASKET	-1
2	ADAPTER, 1/4 FLARE SIZE	-2
3	GASKET	-3
1	ADAPTER, 3/8 FLARE SIZE, WITH GASKET	-4
2	ADAPTER, 3/8 FLARE SIZE	-5

NOTES

1. MATERIAL:

   ADAPTER SHALL BE MADE OF SAE CA360 BRASS (HALF HARD), OR OF CA345 OR CA350 BRASS BAR OR EXTRUDED SHAPES, OR FROM SAE377 BRASS FORGINGS. GASKET TO BE MADE OF COPPER (SOFT ANNEALED), OR FIBER CONFORMING TO COMMERCIAL GRADE OF ASTM-D-710.

2. DIMENSIONS IN INCHES.
3. THE SIZE OF TUBE FLARE END SHALL CORRESPOND TO THE OUTSIDE DIAMETER OF THE TUBE.
4. THE SIZE OF PIPE THREAD ENDS SHALL BE THE CORRESPONDING STANDARD NOMINAL PIPE SIZE.
5. TOLERANCES ON DIMENSIONS NOT OTHERWISE LIMITED SHALL BE PLUS OR MINUS 0.010 INCH.
6. MINIMUM ACROSS CORNER DIMENSIONS OF HEXAGONS SHALL BE 1.092 TIMES THE NOMINAL WIDTH ACROSS FLATS OF THE HEXAGON.
7. PIPE THREADS SHALL CONFORM TO AMERICAN STANDARD STRAIGHT PIPE THREADS FOR MECHANICAL JOINTS, (NPSM) OF ANSI B2.1.
8. REFERENCED DOCUMENTS SHALL BE THE ISSUE IN EFFECT ON DATE OF INVITATION FOR BIDS OR REQUEST FOR PROPOSAL.
9. FOR DESIGN FEATURE PURPOSES, THIS STANDARD TAKES PRECEDENCE OVER PROCUREMENT DOCUMENTS REFERENCED HEREIN.
10. (C) PART NUMBER: THE MS PART NUMBER CONSISTS OF THE MS NUMBER, PLUS THE DASH NUMBER. EXAMPLE: MS 35870-1.

APPROVED 9 JAN 1958 REVISED (A) 5 JULY 1961 (B) 6 MAY 1970 (C) 3 SEPT 1975

REVIEW
ARMY - MR
NAVY - YD
USAF - 82
DSA - CS

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document.

P.A. ARMY - GL Other Cust NAVY - YD USAF - 82	TITLE ADAPTER, REFRIGERANT CYLINDER, EXTERNAL FLARE X STRAIGHT PIPE, REFRIGERATION	MILITARY STANDARD MS 35870
PROCUREMENT SPECIFICATION NONE	SUPERSEDES	SHEET 1 OF 1

DD FORM 672-1 (Commanded) MS-71

PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T17:30Z
Check the source to verify that this is the current version before use.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T17:30Z
Check the source to verify that this is the current version before use.

VALIDATION

MS 35870C
NOTICE 1
31 October 1986

MILITARY STANDARD

ADAPTER, REFRIGERANT CYLINDER, EXTERNAL MOCOUPLE FLARE X STRAIGHT PIPE, REFRIGERATION

Military specification MS 35870C dated 8 September 1975 has been reviewed and determined to be current.

Custodian

Army - GL
Navy - YD
Air Force - 99

Review Activities

Army - ME
DLA - CS

Preparing Activity:
Army - GL

FSC 4730

DISTRIBUTION STATEMENT A: Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T17:30Z
Check the source to verify that this is the current version before use.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T17:30Z
Check the source to verify that this is the current version before use.