


FED. SUP CLASS
6640



STYLE 1
(Plain)



STYLE 3
(Rim)

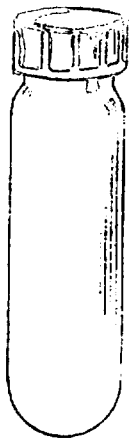

STYLE 3
(Screw Cap)

PART NUMBER	STYLE	CAPACITY ml	DIMENSIONS (mm) DIA	LENGTH	MATERIAL
MS36496-1	1	3.5	10.9	77.0	PP
MS36496-2	2	3.5	10.9	77.0	ETFE
MS36496-3	1	3.5	10.9	77.0	PC
MS36496-4	1	6.5	12.5	101.0	PP
MS36496-5	2	6.5	12.5	101.0	ETFE
MS36496-6	1	6.5	12.5	101.0	PC
MS36496-7	2	7.0	15.8	60.0	PP
MS36496-8	2	7.0	15.8	60.0	PC
MS36496-9	3	10.0	15.8	79.5	PC
MS36496-10	3	10.0	15.8	79.5	PP
MS36496-11	1	12.0	15.8	101.0	PP
MS36496-12	2	12.0	15.8	101.0	ETFE
MS36496-13	1	12.0	15.8	101.0	PC
MS36496-14	1	15.0	15.8	116.0	PP
MS36496-15	2	15.0	15.8	116.0	ETFE
MS36496-16	1	15.0	15.8	116.0	PC
MS36496-17	1	18.0	18.5	116.0	PP
MS36496-18	1	18.0	18.5	116.0	PC
MS36496-19	3	30.0	25.5	92.0	PC
MS36496-20	3	30.0	25.5	92.0	PP

USER ACTIVITIES:

REVIEWER ACTIVITIES:
ARMY - MD
NAVY - OS
AIR FORCE - 03

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document.

APPROVED 12 [illegible] 1982 REVISED

P.A. EA	INTERNATIONAL INTEREST	TITLE	MILITARY STANDARD
Other Cust MS 99		TUBE, CENTRIFUGE, ROUND Plastic	MS36496
Procurement Specifications None	SUPERSEDES:		SHEET 1 OF 2

DD FORM 1 MAY 73 672 (COORDINATED) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

Project number 6640-0796
STANDARD DATE

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T17:42Z
Check the source to verify that this is the current version before use.

PART NUMBER	STYLE	CAPACITY ml	DIMENSIONS (mm) DIA	LENGTH	MATERIAL
MS36496-21	2	50.0	28.5	103.0	PP
MS36496-22	1	50.0	28.5	103.0	PP
MS36496-23	2	50.0	28.5	103.0	ETFE
MS36496-24	1	50.0	28.5	103.0	PC
MS36496-25	2	50.0	28.5	103.0	PC
MS36496-26	3	50.0	28.5	104.0	PC
MS36496-27	3	50.0	28.5	104.0	PP
MS36496-28	3	85.0	38.1	101.0	PC
MS36496-29	2	100.0	31.5	166.0	PP
MS36496-30	2	100.0	31.5	166.0	PC
MS36496-31	3	250.0	62.7	136.0	PC

MATERIAL: The tubes shall be made from material as indicated in the table. The material identification symbols are as follows:

PP - Polypropylene (transparent)
ETFE - Ethylene-Tetrafluoroethylene (transparent)
PC - Polycarbonate (translucent)

Friction-fit and screw caps shall be nolded of polypropylene.

DESIGN: Tubes shall be cylindrical shape with round bottoms. The friction-fit cap shall fit style 1 and 2 tubes and the screw cap shall fit the threads on style 3 tubes.

NOTES:
1. Items differing from this military standard by minor variations in design or dimensions are considered standard under this document, provided such variations do not affect performance and are not in conflict with the material requirements as specified herein.

2. Referenced document shall be of the issue in effect on date of the invitations for bid.

USER ACTIVITIES:
REVIEWER ACTIVITIES:
This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document.

APPROVED 12 FEB 1982 REVISED

P.A.	INTERNATIONAL INTEREST	TITLE	MILITARY STANDARD
Other Cust		TUBE, CENTRIFUGE, ROUND Plastic	MS36496
Procurement Specifications	SUPERSEDES:		SHEET 2 OF 2

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T17:42Z
Check the source to verify that this is the current version before use.