FSC GROUP CLASS 5315

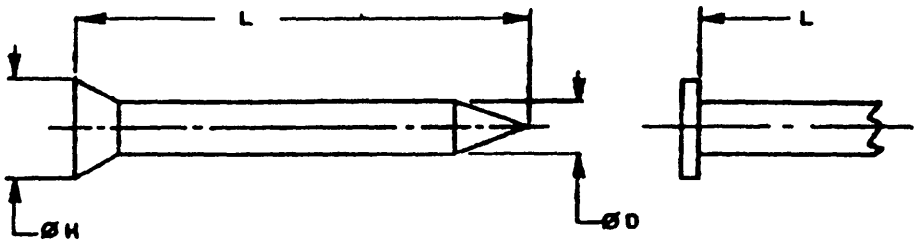


TABLE I. NAIL NUMBERS AND DIMENSIONS.

NAIL NUMBER		L LENGTH	ØD ±.004	ØH HEAD ±.008
FLAT	CHK			
1	1A	5/8 ±1/32	.000	.154
2	2A	3/4 ±1/32	.000	.154
3	3A	7/8 ±1/32	.000	.154
4	4A	1 ±1/32	.000	.154
5	5A	1 1/8 ±1/16	.000	.154
6	6A	1 1/4 ±1/16	.000	.154

REQUIREMENTS:

1. MATERIAL. NAIL, TYPE II, STYLE 34 SHALL BE MANUFACTURED FROM STEEL WIRE IN ACCORDANCE WITH PROCUREMENT SPECIFICATION.
2. CONSTRUCTION. NAIL SHALL HAVE FLAT OR COUNTERSUNK HEAD, DIAMOND POINT, ROUND SMOOTH SHANK AND SMOOTH FINISH (SEE NOTE 6).
3. SHANK DIMENSIONS. TOLERANCES ON SHANK DIAMETERS SHALL BE ±.004 INCH. TOLERANCES SHALL APPLY BEFORE APPLICATION OF PROTECTIVE COATING OR FINISHES.
4. LENGTH. TOLERANCES ON LENGTHS SHALL BE ±1/32 INCH FOR LENGTHS UP TO AND INCLUDING 1 INCH; ±1/16 INCH FOR LENGTHS OVER 1 INCH UP TO AND INCLUDING 2 1/2 INCHES; ±3/32 FOR LENGTHS OVER 2 1/2 INCHES UP TO AND INCLUDING 7 INCHES AND ±1/8 INCH FOR LENGTHS OVER 7 INCHES.
5. HEAD DIAMETERS. THE DIFFERENCE IN DIAMETER ACROSS THE LONG AXIS SHALL NOT EXCEED THAT ACROSS THE SHORT AXIS BY MORE THAN 10 PERCENT. A FILLET SHALL BE PROVIDED UNDER THE HEAD; AN ANGLE OR KNURL WILL BE ACCEPTABLE. HEADS SHALL BE WELL CENTERED.

REVIEW ACTIVITIES: CIVIL AGENCIES COORDINATING ACTIVITIES (SAME ACTIVITIES)
ARMY-GE,SL,ME GSA-FSS ARMY-AV,MI
NAVY-MC,SA NAVY-AS,SH

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.
This military standard is approved for use by all Departments and Agencies of the Department of Defense.
Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be used in improving this document should be addressed to:

P. A. ARMY-AR Other Cust: NAVY-YD AIR FORCE-99	INTERNATIONAL INTEREST	TITLE: NAIL, RUBBER HEEL	MILITARY STANDARD MS 51543
PROCUREMENT SPECIFICATION FF-N-105	SUPERSEDES:		PAGE 1 OF 2

AMSC N/A DD FORM 672-1 (COORDINATED) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE. 5315-0400

APPROVED 28 OCT 86 REVISED

Source: https://assist.dla.mil -- Downloaded: 202610-23T18:06Z
Check the source to verify that this is the current version before use.

6. PART NUMBER. THE PART NUMBER SHALL CONSIST OF THE BASIC MS NUMBER, PLUS A DASH NUMBER FROM TABLE I.

EXAMPLE: MS51543-3

DASH NUMBER

BASIC MS PART NUMBER

MS51543-3 DESIGNATES - NAIL, RUBBER HEEL, .088 SHANK DIAMETER, .154 HEAD DIAMETER, 7/8 LONG, FLAT HEAD

NOTES:

1. ALL DIMENSIONS ARE IN INCHES.
2. [illegible] FINISH IS A TERM APPLIED TO NAILS WITH NATURAL DARK FINISH RESULTING FROM CLEANING OF NAILS WHICH HAVE NOT RECEIVED THEREAFTER ADDITIVE SURFACE SUCH AS LUBRICANT, PLATING, COATING, PLASTIC, ENAMELS AND PAINTING.
3. IN THE EVENT OF A CONFLICT BETWEEN THE TEXT OF THIS STANDARD AND THE REFERENCES CITED HEREIN, THE TEXT OF THIS STANDARD SHALL TAKE PRECEDENCE.
4. REFERENCED GOVERNMENT (OR NON-GOVERNMENT) DOCUMENTS OF THE ISSUE LISTED IN THAT ISSUE OF THE DEPARTMENT OF DEFENSE INDEX OF SPECIFICATIONS AND STANDARDS (DODISS) SPECIFIED IN THE SOLICITATION, FORM A PART OF THIS STANDARD TO THE EXTENT SPECIFIED HEREIN.

REVISED 28 OCT 86 MTSD

PREPARING ACTIVITIES (CIVIL AGENCIES COORDINATING ACTIVITIES THEIR ADDRESSES)
ARMY-CE,BLAKE GSA-FSS
NAVY-MC,SA
ARMY-AV,MI
NAVY-AS,SH

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be addressed to: [illegible] by using the self-addressed Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.

V. A.	INTERNATIONAL INTEREST	TITLE	MILITARY STANDARD
Orders Code ARMY-AR NAVY-YD AIR FORCE-99		NAIL, RUBBER HEEL	MS51543
PROCUREMENT SPECIFICATION FF-N-105	SUPERSEDES		PAGE 2 OF 2

DD FORM 672-1 (COORDINATED) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE 5310-0400

Source: https://assist.dla.mil -- Downloaded: 202610-23T18:06Z
Check the source to verify that this is the current version before use.