MILITARY SPECIFICATION

# CONNECTOR, RECEPTACLE, ELECTRICAL, SERIES PULSE, TYPE UG-264/U

This specification has been approved by the Department of Defense and is mandatory for use by the Departments of the Army, the Navy, and the Air Force.

## 1. SCOPE

1.1 This specification covers the detail requirements for type UG-264/U, series pulse, electrical receptacle connector.

## 2. APPLICABLE DOCUMENTS

2.1 The following documents, of the issue in effect on date of invitation for bids, form a part of this specification to the extent specified herein.

SPECIFICATION

Military

MIL-C-3607 - Connectors, Coaxial, Radio-frequency, Series Pulse, General Specification for.

DRAWINGS

Bureau of Ships

REB10021 - Gasket.
REB10465 - Body.
REB10498 - Contact.
REB10499 - Contact.
REB10508 - Insulator Assembly.

(Copies of specifications and drawings required by contractors in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

## 3. REQUIREMENTS

3.1 Requirements. Requirements shall be in accordance with Specification MIL-C-3607, and as specified herein.

3.2 Design and construction. The electrical receptacle connector shall be of the design, construction, and physical dimension specified on figure 1.

## 4. QUALITY ASSURANCE PROVISIONS

4.1 Sampling and inspection. Sampling and inspection shall be in accordance with Specification MIL-C-3607, and as specified herein.

4.2 Leakage. The leakage test is not applicable.

4.3 Dielectric withstanding voltage. The test voltage for the dielectric-withstanding-voltage-test shall be 9,000 volts, root mean square.

## 5. PREPARATION FOR DELIVERY

5.1 Preparation for delivery shall be in accordance with Specification MIL-C-3607.

## 6. NOTES

6.1 Notes. In addition to the notes specified herein, the notes specified in Specification MIL-C-3607 are applicable to this specification.

6.2 Intended use. Electrical receptacle connector UG-264/U is designed for use with radio-frequency pulse cables.

6.3 This specification covers the design of type UG-264/U electrical receptacle connector which was previously covered by Bureau of Ships Drawing REB49206.


Notice. When Government drawings, specifications, or other data are used for any purpose other than in connection with a definitely related Government procurement operation, the United States Government thereby incurs no responsibility nor any obligation whatsoever; and the fact that the Government may have formulated, furnished, or in any way supplied the said drawings, specifications, or other data is not to be regarded by implication or otherwise as in any manner licensing the holder or any other person or corporation or conveying any rights or permission to manufacture, use, or sell any patented invention that may in any way be related thereto.

Custodians:
Army - Signal Corps
Navy - Bureau of Ships
Air Force - AFSC

Preparing activity:
Navy - Bureau of Ships
(Project 5935-0152)

FSC 5935

Source: https://assist.dla.mil -- Downloaded: 20261O-16T18:38Z
Check the source to verify that this is the current version before use.

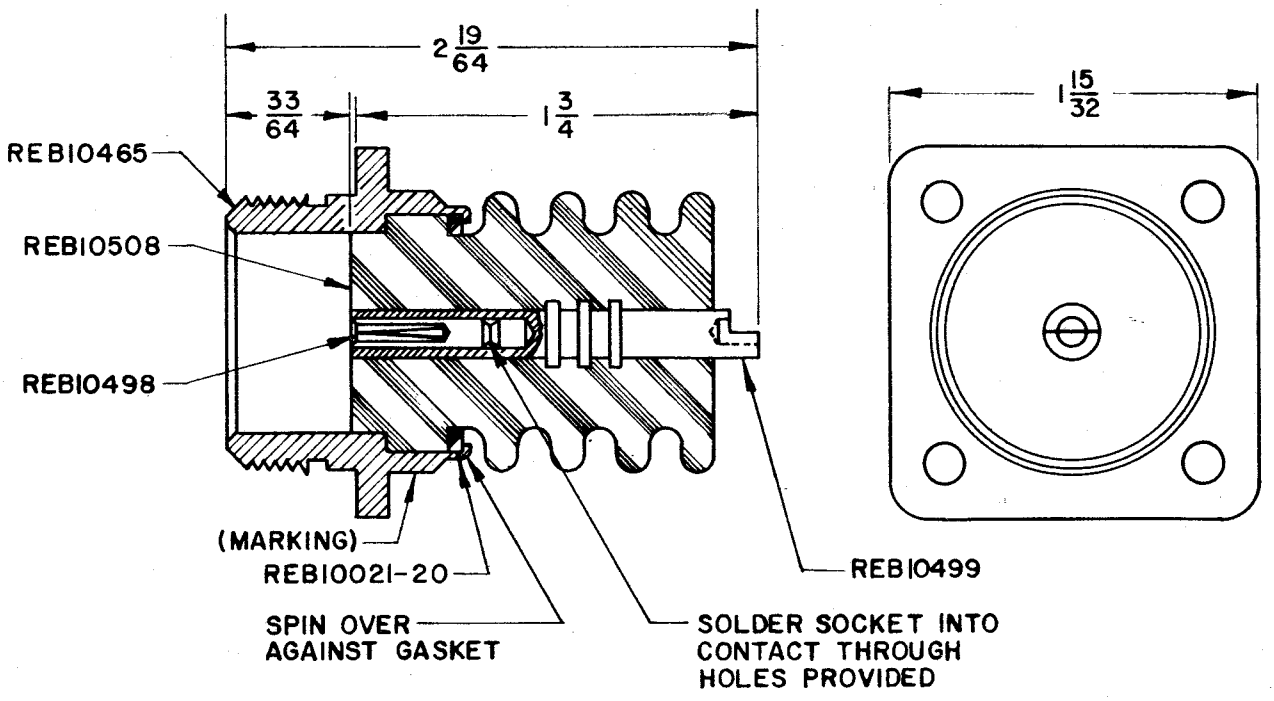


ASSEMBLY

1. All dimensions in inches.
2. Tolerances are ±1/64 on fractions.
3. All metal parts shall have a silver plating of 0.0002 inch thick.

Figure 1. Type UG-264/U electrical receptacle connector.



Source: https://assist.dla.mil -- Downloaded: 2026-10-16T18:38Z
Check the source to verify that this is the current version before use.