MIL-C-3607/5B
16 March 1966
SUPERSEDING
MIL-C-3607/5A
1 June 1965
(See 6.4)

MILITARY SPECIFICATION

CONNECTOR; RECEPTACLE, ELECTRICAL, PRESSURIZED, SERIES PULSE, TYPE UG-62A/U

This specification is mandatory for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 This specification covers the detail requirements for type UG-62A/U, series pulse, pressurized, electrical receptacle connector.

2. APPLICABLE DOCUMENTS

2.1 The following documents, of the issue in effect on date of invitation for bids or request for proposal, form a part of this specification to the extent specified herein.

SPECIFICATION

MILITARY

MIL-C-3607 - Connectors, Coaxial, Radiofrequency, Series Pulse, General Specification for.

DRAWINGS

BUREAU OF SHIPS

REA10053 - Flange.
REA10469 - Cap.
REA10487 - Contact.
REB10021 - Gasket.
REB10042 - Ring.
~~REB10400 - Body.~~
REB10506 - Insulator.

(Copies of specifications, standards, drawings, and publications required by suppliers in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

3. REQUIREMENTS

3.1 Requirements. Requirements shall be in accordance with MIL-C-3607, and as specified herein.

3.2 Design and construction. The electrical receptacle connector shall be of the design, construction, and physical dimensions specified in figure 1.

4. QUALITY ASSURANCE PROVISIONS


4.1 Sampling and inspection. Sampling and inspection shall be in accordance with MIL-C-3607, and as specified herein.

4.1.1 Group B inspection. Group B inspection shall be in accordance with MIL-C-3607. Mating dimensions shall be as specified in figure 2.

* 4.2 Inspection in preparation for delivery. Inspection of preparation for delivery requirements shall be in accordance with section 5 of MIL-C-3607.


FSC 5935

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T18:37Z
Check the source to verify that this is the current version before use.

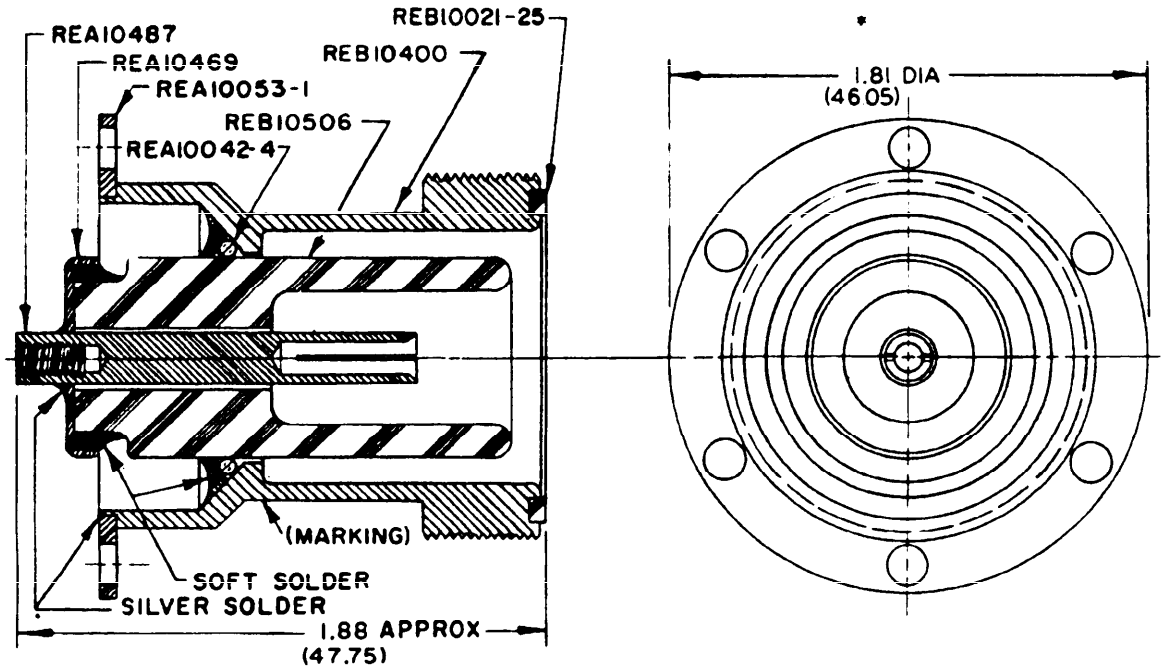

NOTES:
1. Dimensions are in inches.
2. Millimeters are in parentheses.
3. Metric equivalents (to the nearest .01 mm) are given for general information only and are based upon 1 inch = 25.4 mm.
4. Tolerance is ±.02 on decimals.
5. All metal parts shall be nickel plated.

FIGURE 1. Type UG-62A/U electrical receptacle connector.

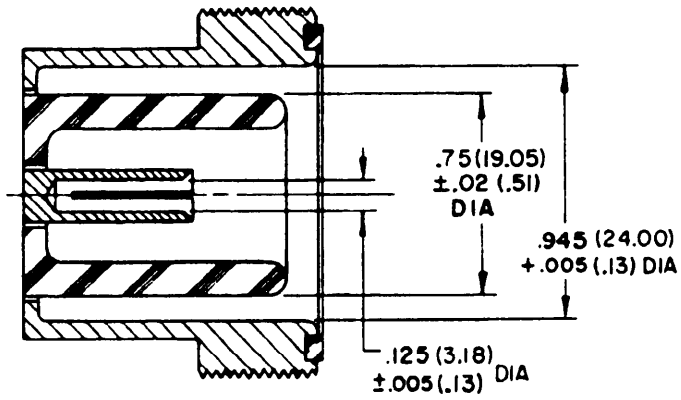

NOTES:
1. Dimensions are in inches.
2. Millimeters are in parentheses.
3. Metric equivalents (to the nearest .01 mm) are given for general information only and are based upon 1 inch = 25.4 mm.

FIGURE 2. Dimensional requirements for group B inspection.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T18:37Z
Check the source to verify that this is the current version before use.

*4.3 Dielectric withstanding voltage. The test voltage for the dielectric-withstanding-voltage-test shall be 9,000 volts root mean square when connector is immersed in oil as a precaution against air-gap voltage breakdown.

5. PREPARATION FOR DELIVERY

5.1 Preparation for delivery shall be in accordance with MIL-C-3607.

6. NOTES

6.1 Notes. In addition to the notes specified herein, the notes specified in MIL-C-3607 are applicable to this specification.

6.2 Intended use. The electrical receptacle connector type UG-62A/U is designed for use with radiofrequency-pulse cables.

*6.3 Cross-reference data. This specification covers the design of type UG-62A/U electrical receptacle connector which previously was covered by Bureau of Ships Drawing REB49187.

*6.4 Changes from previous issue. The margins of this specification are marked with an asterisk to indicate where changes (additions, modifications, corrections, deletions) from the previous issue were made. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notions. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notions and relationship to the last previous issue.

Custodians:
Army - EL
Navy - SH
Air Force - 11

Review activities:
Army - EL, MI, MU
Navy - SH
Air Force - 11

User activities:
Army - MO
Navy - WP, MC, CG
Air Force -

Preparing activity:
Navy - SH

(Project 5935-1442)

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T18:37Z
Check the source to verify that this is the current version before use.