MILITARY SPECIFICATION SHEET

# HOSE, RUBBER: HYDRAULIC PRESSURE-TYPE: TYPE 100R10

## FOUR-SPIRAL-WRAP REINFORCEMENT HOSE

Inactive for new design after 31 July 1987
For new design use MIL-H-52471/7.

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the hose described herein shall consist of this specification and the latest issue of MIL-H-52471.

REQUIREMENTS:

1. The hose shall be in accordance with tables I and II, figure 1, and as specified herein.

2. Inside and outside diameters are measured at least 2 inches from the end.

3. This hose must be listed on QPL-52471.

AMSC N/A FSC 4720

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.



Source: https://assist.dla.mil -- Downloaded: 2026-10-22T21:20Z
Check the source to verify that this is the current version before use.

TABLE I. Dimensions, type 100R10 hose.

| Nominal hose size I.D. | Dash number | A Inner tube | | | | | |
|---|---|---|---|---|---|---|---|
| | | Inside diameter | | I.D. tolerance | | | |
| | | inch | mm | inch | | mm | |
| 1/4 | -4 | 0.250 | 6.4 | +0.023 | -0.008 | +0.6 | -0.2 |
| 3/8 | -6 | 0.375 | 9.5 | +0.023 | -0.008 | +0.6 | -0.2 |
| 1/2 | -8 | 0.500 | 12.7 | +0.039 | -0.008 | +1.0 | -0.2 |
| 3/4 | -12 | 0.750 | 19.0 | +0.047 | -0.000 | +1.2 | -0.0 |
| 1 | -16 | 1.000 | 25.4 | +0.063 | -0.000 | +1.6 | -0.0 |
| 1-1/4 | -20 | 1.250 | 31.8 | +0.063 | -0.000 | +1.6 | -0.0 |
| 1-1/2 | -24 | 1.500 | 38.1 | +0.063 | -0.000 | +1.6 | -0.0 |
| 2 | -32 | 2.000 | 50.8 | +0.070 | -0.000 | +1.8 | -0.0 |



Source: https://assist.dla.mil -- Downloaded: 2026/10-22T21:20Z
Check the source to verify that this is the current version before use.

TABLE I. Dimensions, type 100R10 hose. - Continued

| Nominal hose size I.D | Dash number | B Cover | | | | B Cover alternate | |
|---|---|---|---|---|---|---|---|
| | | Maximum Outside diameter | | Minimum Outside diameter | | Maximum Outside diameter | |
| | | inch | mm | inch | mm | inch | mm |
| 1/4 | -4 | 0.844 | 21.4 | 0.781 | 19.8 | - | - |
| 3/8 | -6 | 0.969 | 24.6 | 0.906 | 23.0 | - | - |
| 1/2 | -8 | 1.125 | 28.6 | 1.062 | 27.0 | - | - |
| 3/4 | -12 | 1.469 | 37.3 | 1.406 | 35.7 | 1.450 | 36.8 |
| 1 | -16 | 1.797 | 45.6 | 1.703 | 43.3 | 1.790 | 45.5 |
| 1-1/4 | -20 | 2.062 | 52.4 | 1.938 | 49.2 | 2.062 | 52.3 |
| 1-1/2 | -24 | 2.312 | 58.7 | 2.188 | 55.6 | 2.310 | 58.7 |
| 2 | -32 | 2.844 | 72.2 | 2.719 | 69.1 | 2.840 | 72.1 |



Source: https://assist.dla.mil -- Downloaded: 2026-10-22T21:20Z
Check the source to verify that this is the current version before use.

TABLE I. Dimensions, type 100R10 hose. - Continued

| Nominal hose size I.D | Dash number | C Wire reinforcement Maximum outside diameter | | T Alternate cover thickness range | | | | Maximum working pressure | |
|---|---|---|---|---|---|---|---|---|---|
| | | | | Maximum | | Minimum | | | |
| | | inch | mm | inch | mm | inch | mm | psi | MPa |
| 1/4 | -4 | 0.687 | 17.4 | - | - | - | - | 8750 | 60.3 |
| 3/8 | -6 | 0.812 | 20.6 | - | - | - | - | 7500 | 51.7 |
| 1/2 | -8 | 0.969 | 24.6 | - | - | - | - | 6250 | 43.1 |
| 3/4 | -12 | 1.281 | 32.5 | 0.078 | 2.0 | 0.039 | 1.0 | 5000 | 34.5 |
| 1 | -16 | 1.594 | 40.5 | 0.094 | 2.4 | 0.047 | 1.2 | 4000 | 27.6 |
| 1-1/4 | -20 | 1.859 | 47.2 | 0.109 | 2.8 | 0.054 | 1.4 | 3000 | 20.7 |
| 1-1/2 | -24 | 2.109 | 53.6 | 0.109 | 2.8 | 0.054 | 1.4 | 2500 | 17.2 |
| 2 | -32 | 2.640 | 67.1 | 0.109 | 2.8 | 0.054 | 1.4 | 2500 | 17.2 |





Source: https://assist.dla.mil -- Downloaded: 2026/10-22T21:20Z
Check the source to verify that this is the current version before use.

TABLE II. Concentricity.

| Nominal hose I.D. | Concentricity (FIM) between | | | |
|---|---|---|---|---|
| | Tube I.D. (A) and cover O.D. (B) | | Tube I.D. (A) and reinforcement O.D. (C) | |
| inch | inch | mm | inch | mm |
| 1/4 | 0.030 | 0.8 | 0.021 | 0.5 |
| 3/8, 1/2, 3/4 | 0.040 | 1.0 | 0.028 | 0.7 |
| 1, 1-1/4, 1-1/2, 2 | 0.050 | 1.3 | 0.035 | 0.9 |

CATALOGING DATA: The military specification part number is a definitive part number which corresponds to the size of hoses covered by this specification sheet. The specification sheet number and the size dash number are combined to form a definitive military specification part number.

EXAMPLE: Military specification part number M52471/6 -4

Military specification sheet number
Size dash number (see table I)

Custodian:
Army - ME
Air Force - 99

Review activities:
Army - GL
Air Force - 82
DLA - CS


User activity:
Army - AR

Preparing activity:
Army - ME

Project 4720-0678



Source: https://assist.dla.mil -- Downloaded: 2026-10-22T21:20Z
Check the source to verify that this is the current version before use.

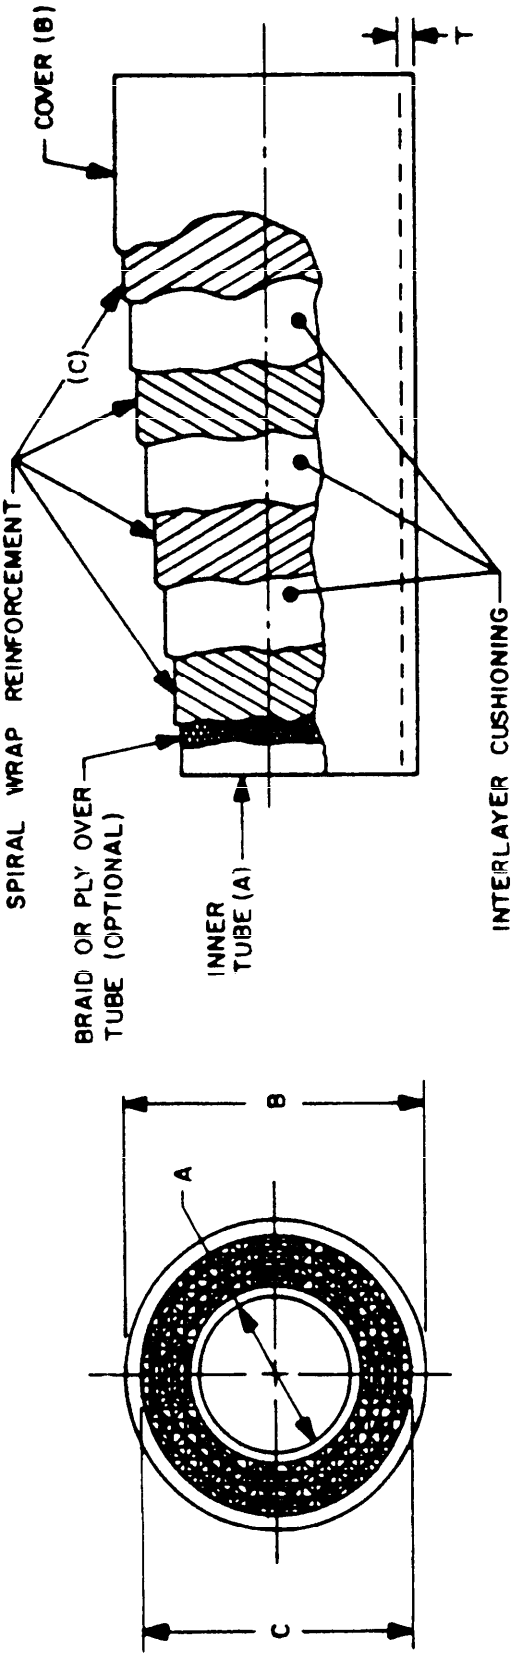


X-3393

FIGURE 1. Hose: Type 100R10, 4 spiral wrap reinforcement.



Source: https://assist.dla.mil -- Downloaded: 2026-10-22T21:20Z
Check the source to verify that this is the current version before use.