A-A-55485/1
September 30, 1993
SUPERSEDING
MIL-M-38527/1B
February 16, 1990

COMMERCIAL ITEM DESCRIPTION

MOUNTING PADS, ELECTRICAL-ELECTRONIC COMPONENT, .100 DIAMETER PIN CENTER

The General Services Administration has authorized the use of this commercial item description (CID) in preference to MIL-M-38527/1B.

Abstract This CID covers mounting pads with pin through-holes located on a .100 diameter circle.

Part or Identifying Number (PIN) The PIN shall be A-55485/01- (plus a dash number from figure 1 and a material letter as shown below). Complete PIN example: A-55485/01-030D

Salient characteristics

Material Material shall be diallyl phthalate (D) or nylon (N)

Configurations and dimensions Configurations and dimensions shall be as specified on figure 1

Regulatory requirements This section is not applicable to this CID

Quality assurance provisions. Quality assurance provisions shall be as specified in A-A-55485

Packaging. Packaging shall be as specified in A-A-55485

Suggested sources of supply Suggested sources of supply are shown in table I

Supersession data Supersession data shall be as specified in table II

Notes The following information may be useful in acquiring the items described, but is not directive in nature.


Ordering data. Ordering data shall be as specified in A-A-55485

Comments Comments and requests for changes to this CID should be directed to Defense Electronics Supply Center, ATTN. DESC-EMM, 1507 Wilmington Pike, Dayton, OH 45444-5270, telephone (513) 296-5255, FAX (513) 296-8868.

AMSC N/A FSC 5999


DISTRIBUTION STATEMENT A Approved for public release, distribution is unlimited

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:48Z
Check the source to verify that this is the current version before use.

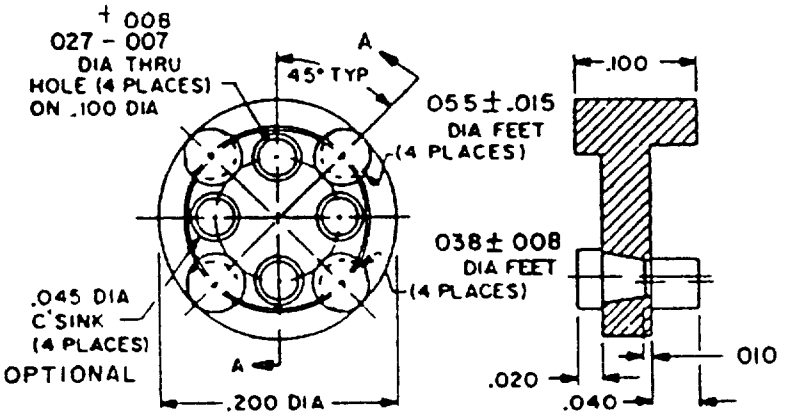


Inches	mm
.007	0.18
.008	0.20
010	0 25
015	0 38
.020	0 51
027	0 69
038	0 97
040	1 02
045	1 14
055	1 40
100	2 54
200	5 08


A-55485/01-030

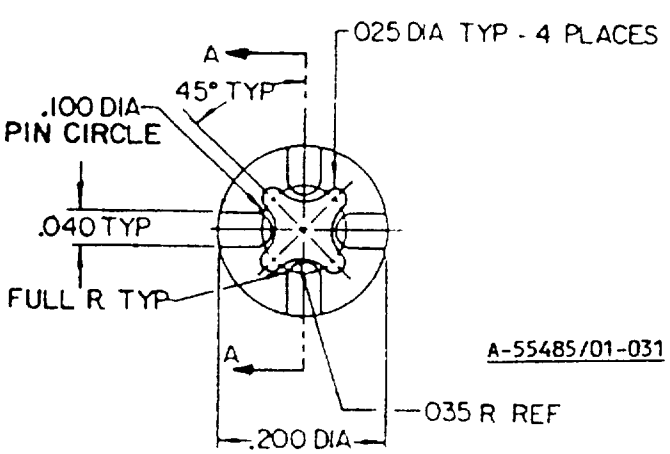


A-55485/01-031



Inches	mm
015	0 38
025	0.64
035	0 89
040	1 02
045	1.14
062	1 57
100	2.54
200	5 08

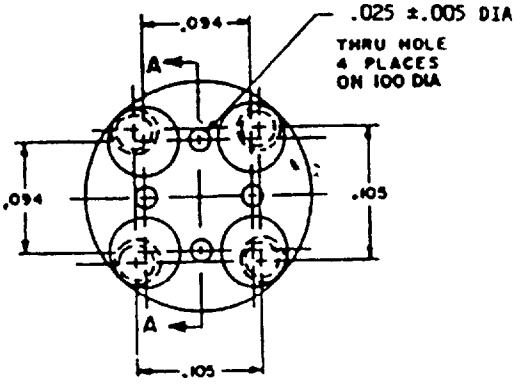


A-55485/01-032

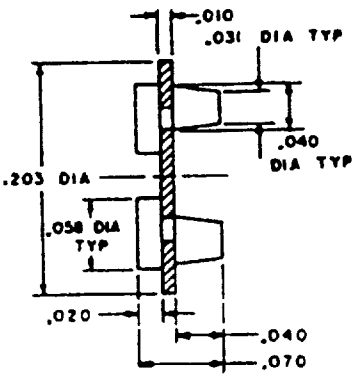

Inches	mm
.005	0.13
.010	0.25
.020	0.51
.025	0.64
.031	0.79
.040	1.02
.058	1.47
.070	1.78
.094	2.39
.100	2.54
105	2.67
.203	5 16


Figure 1 Configurations and dimensions

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:48Z
Check the source to verify that this is the current version before use.

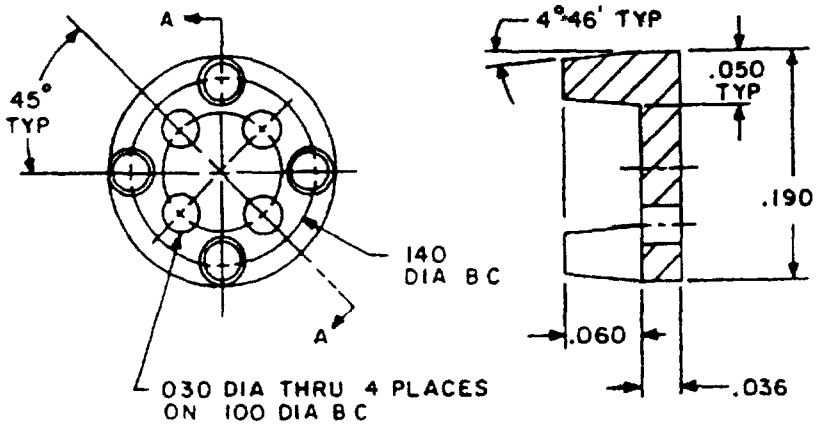


A-55485/01-033

Inches	mm
.030	0.76
.036	0.91
.050	1.27
.060	1.52
.100	2 54
.140	3 56
190	4 83

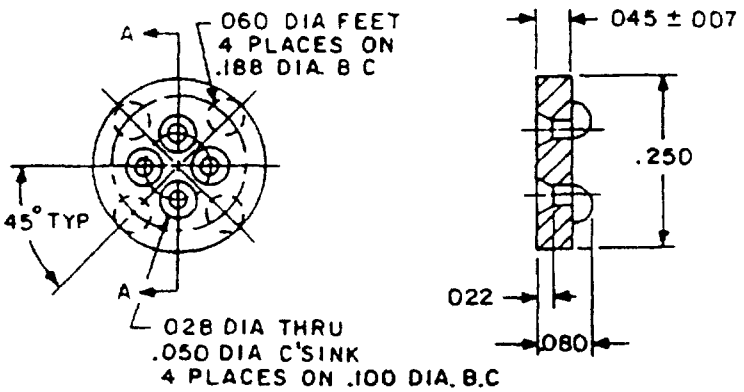

A-55485/01-034

Inches	mm
007	0 13
022	0 56
.028	0 71
.045	1 14
.050	1 27
.060	1 52
.080	2 03
.100	2 54
.188	4 78
250	6 35

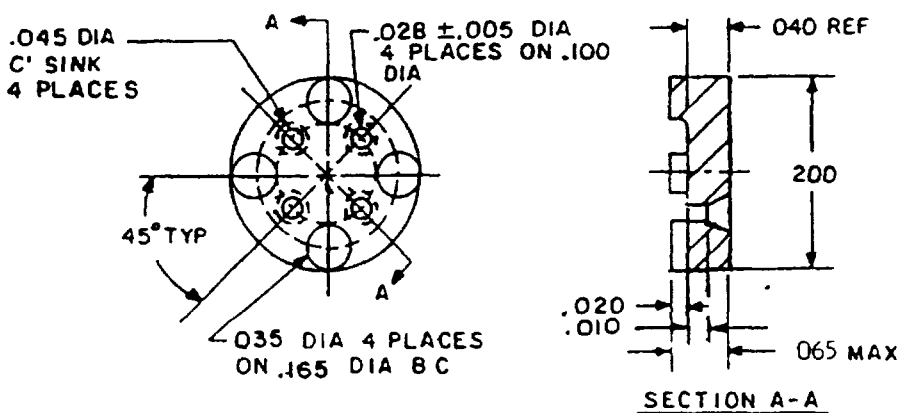


A-55485/01-035

Inches	mm
.005	0.13
.010	0.25
.020	0 51
028	0.71
035	0 89
040	1.02
045	1.14
.065	1.65
.100	2 54
165	4 19
200	5 08


Figure 1 Configurations and dimensions - Continued

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:48Z
Check the source to verify that this is the current version before use.

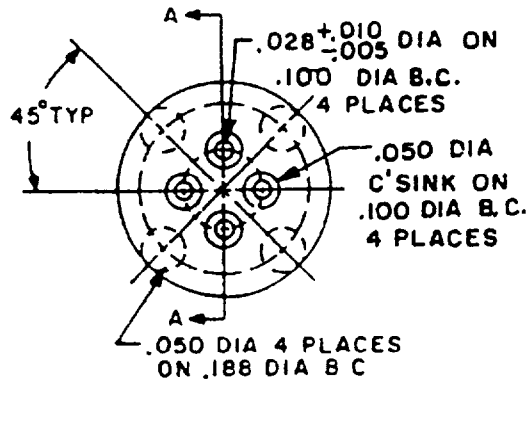


Inches	mm
.005	0.13
.010	0.25
.017	0.43
.028	0.71
.036	0.91
.038	0.97
.050	1.27
100	2.54
188	4.78
240	6.10

A-55485/01-036

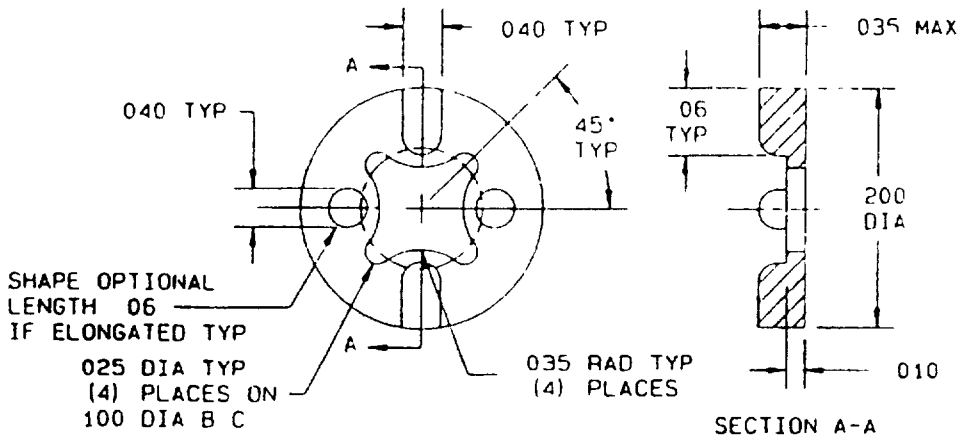

Inches	mm
.010	0.25
.015	0.38
.020	0.51
.025	0.64
.035	0.89
.040	1.02
.06	1.5
.100	2.54
.200	5.08

A-55485/01-037

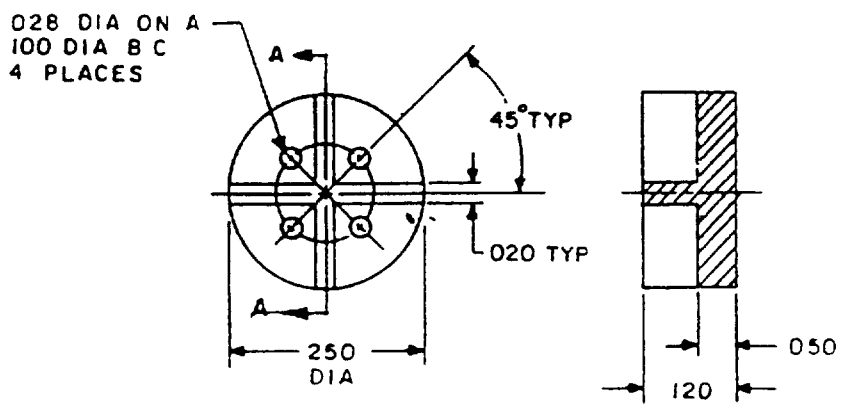


Inches	mm
.020	0 51
.028	0 71
.050	1.27
.100	2 54
.120	3 05
.250	6 35

A-55485/01-038

Figure 1 Configurations and dimensions - Continued


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:48Z
Check the source to verify that this is the current version before use.

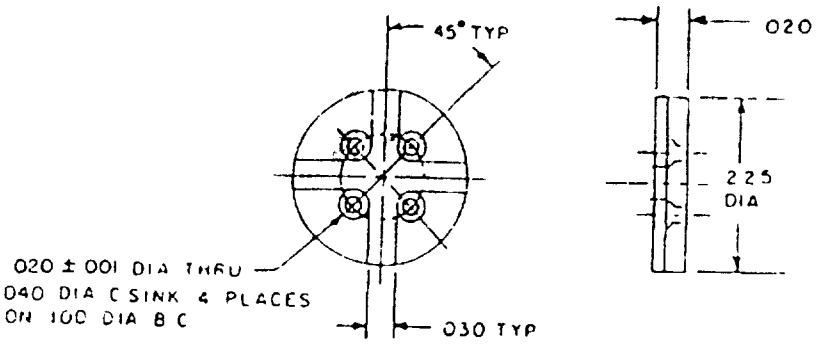

A-55485/01-039


Inches	mm
001	0 03
003	0 08
010	0 25
020	0 51
030	0 76
040	1 02
100	2 54
225	5 72

A-A-55485/1

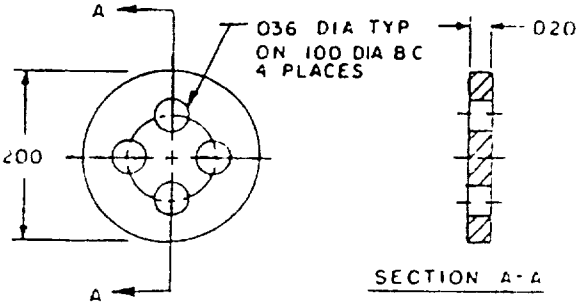


A-55485/01-040

Inches	mm
020	0 51
036	0 91
100	2 54
200	5 08

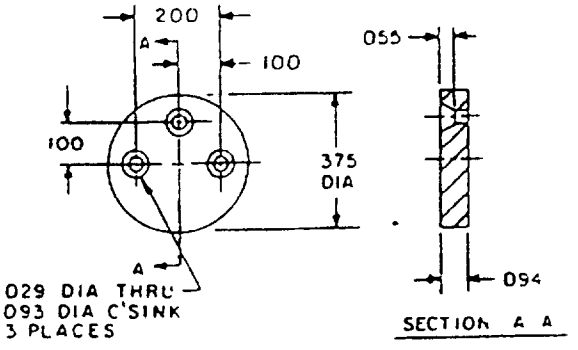

A-55485/01-041

Inches	mm
029	0 74
055	1 40
093	2 36
094	2 39
100	2 54
200	5 08
375	9 53

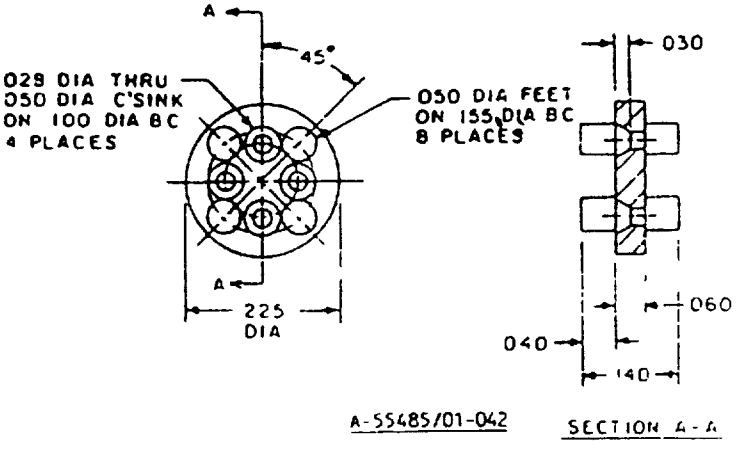


A-55485/01-042 SECTION A-A

Inches	mm
028	0 71
030	0 76
040	1 02
050	1 27
060	1 52
100	2 54
140	3 56
155	3 94
225	5 72


Figure 1. Configurations and dimensions - Continued

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:48Z
Check the source to verify that this is the current version before use.

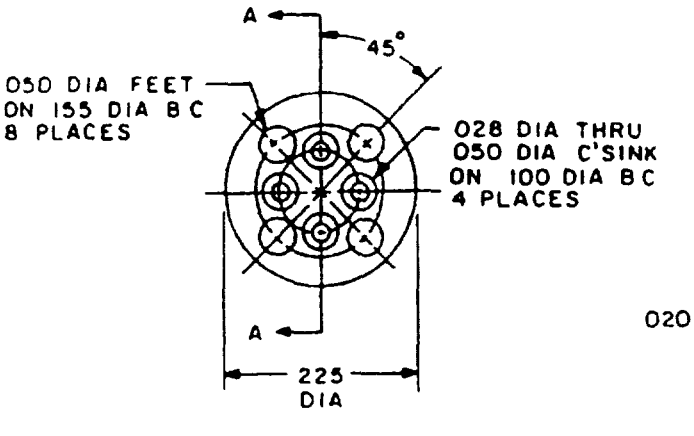


Inches	mm
.015	0.38
.020	0.51
.028	0.71
.050	1.27
.100	2 54
120	3.05
155	3.94
.180	4.57
.225	5 72

A-55485/01-043

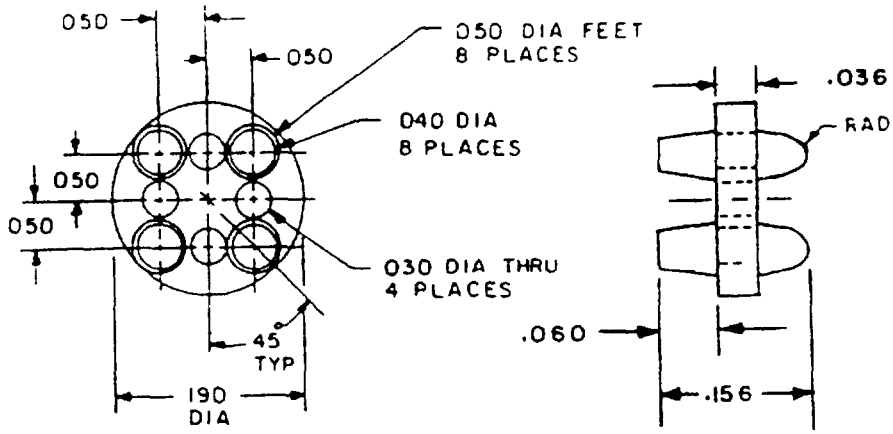

Inches	mm
.030	0.76
.036	0.91
.040	1.02
.050	1 27
.060	1 52
.156	3 96
190	4.83

A-55485/01-044

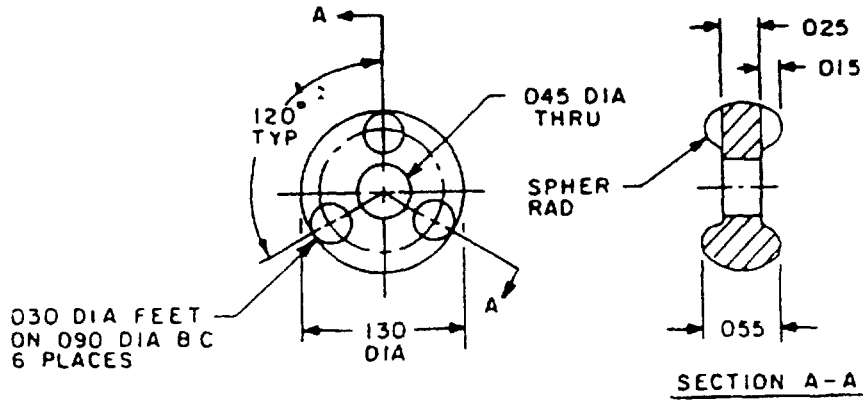


Inches	mm
.015	0.38
.025	0.64
030	0 76
.045	1.14
.055	1.40
.090	2.29
130	3.30

A-55485/01-045

Figure 1 Configurations and dimensions - Continued.


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:48Z
Check the source to verify that this is the current version before use.

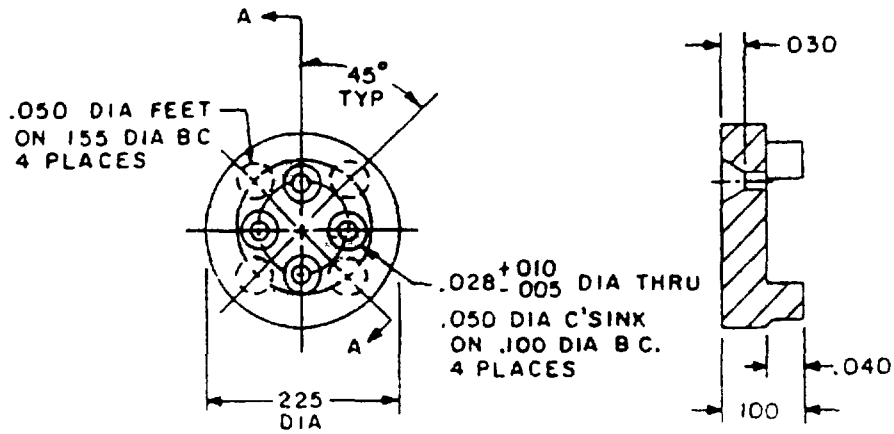

A-55485/01-046

SECTION A-A

Inches	mm
005	0.13
.010	0.25
.028	0.71
.030	0.76
.040	1.02
.050	1.27
.100	2.54
.155	3.94
.225	5.72

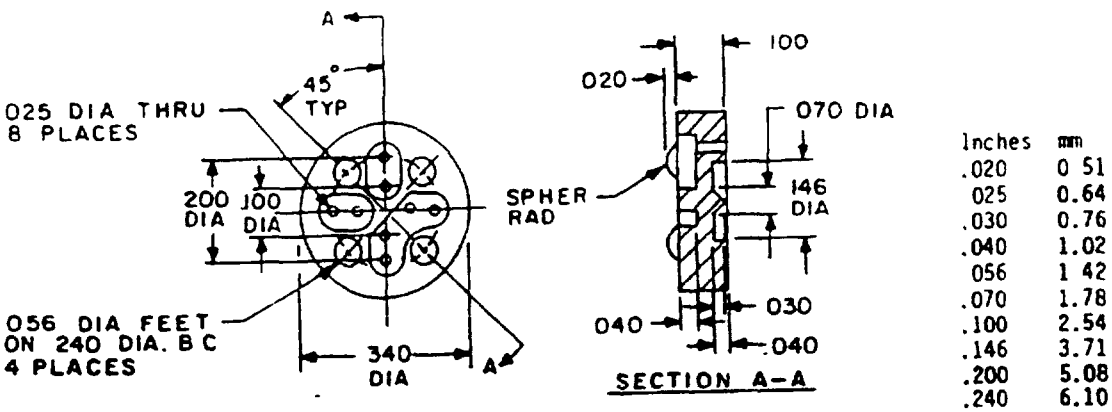


A-55485/01-047

SECTION A-A

Inches	mm
.020	0 51
025	0.64
.030	0.76
.040	1.02
056	1 42
.070	1.78
.100	2.54
.146	3.71
.200	5.08
.240	6.10
340	8.64

Figure 1 Configurations and dimensions - Continued


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:48Z
Check the source to verify that this is the current version before use.

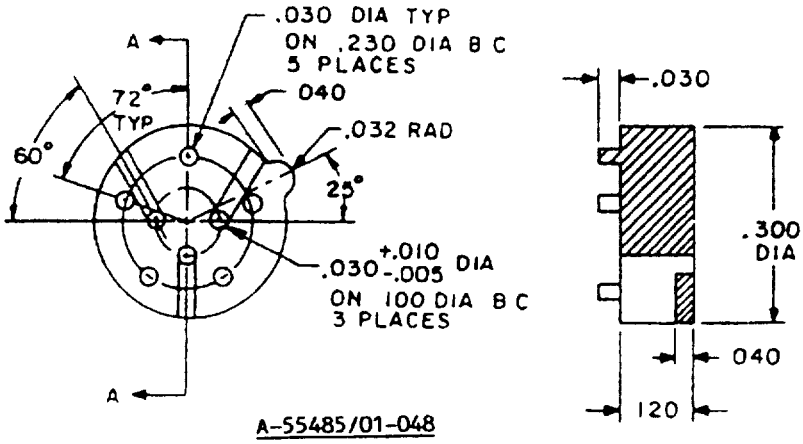

A-55485/01-048

SECTION A-A

Inches	mm
.005	0.13
010	0.25
.030	0.76
.032	0.81
040	1.02
100	2.54
120	3 05
230	5 84
300	7 62

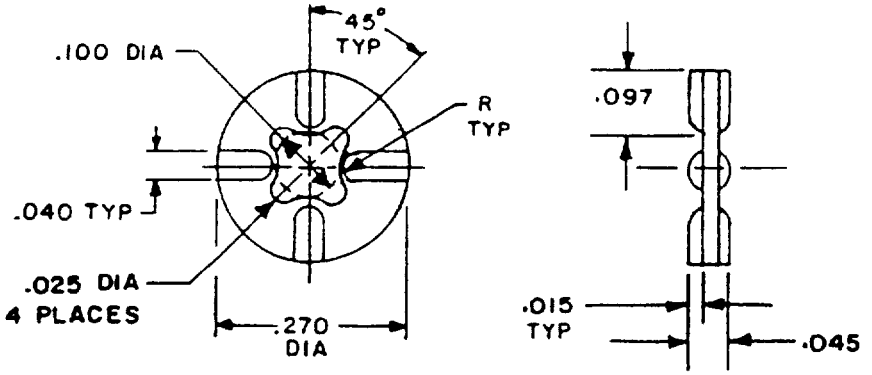

A-55485/01-049

Inches	mm
015	0.38
.025	0.64
040	1.02
.045	1 14
097	1.70
.100	2.54
.270	6.86

NOTES.
1. Dimensions are in inches
2. Metric equivalents are given for general information only
3. Tolerance on height of pad shall be ± 015 (0.38 mm)
4. Unless otherwise specified, tolerances are ±.010 (0.25 mm) for decimals and ±1° on angles A 010 (0 25 mm) radius is permissible on corners and edges A 1° draft is permitted on sides

Figure 1 Configurations and dimensions - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:48Z
Check the source to verify that this is the current version before use.

TABLE I. Suggested sources of supply. 1/

CID PIN (see figure 1) A-55485/01-	Vendor commercial PIN 2/							
	CAGE code 07047	CAGE code 08289	CAGE code 13103	CAGE code 21071	CAGE code 24227	CAGE code 32559	CAGE code 53174	CAGE code 54355
030N	10167N		7717-18N	10058-1	1018	115-100	AP-002/N	965-525N
030D	10167D		7717-18D	10058-2			AP-002/D	965-525D
031N	10172N		7717-152N	10239-1	1011	109-045	AP-036/B/N	965-541N
031D	10172D		7717-152D	10239-2			AP-036/B/D	965-541D
032N	10239N		7717-108N	10052-1			AP-136/N	965-547N
032D	10239D		7717-108D	10052-2			AP-136/D	965-547D
033N	10216N		7717-188N	10070-1	1029	119-096	AP-286/N	965-545N
033D	10216D			10070-2			AP-286/D	965-545D
034N	10042N		7717-89N	10108-1	1020	117-080	AP-028/N	965-527N
034D	10042D		7717-89D	10108-2			AP-028/D	965-527D
035N	10206N			10160-1		116-060	AP-284/N	965-526N
035D				10160-2			AP-284/D	965-526D
036N	10045N			10234-1	1027	118-055	AP-065/D	965-528N
036D	10045D			10234-2			AP-065/D	965-528D
037N	10168N			10238-1	1000	110-030	AP-036/A/N	965-546N
037D	10168D			10238-2			AP-036/A/D	965-546D
038N	10304N	503-041-N	7717-7N	10746-1			AP-008/N	965-564N
038D	10304D	503-041-D	7717-7D	10746-2			AP-008/D	965-564D
039N	10234N							
039D								
040N			7717-16N	10114-1	1017	104-020	AP-014/N	965-524N
040D	10325D		7717-16D	10114-2			AP-014/D	965-524D
041N	10038N			10020-1	3035	521-094	AP-165/N	965-548N
041D	10038D			10020-2			AP-165/D	965-548D
042N								
042D	10117D							
043N				10254-1			AP-144/N	965-567N
043D	10243D			10254-2			AP-144/D	965-567D
044N	10053N			10018-1	1030	120-156	AP-213/N	965-838N
044D				10018-2			AP-213/D	965-838D
045N				10550-1			AP-151/N	965-531N
045D	10226D			10550-2			AP-151/D	965-531D
046N				10246-1			AP-455/N	965-597N
046D				10246-2			AP-455/D	965-597D
047N				10038-1			AP-162/N	965-517N
047D	10067D			10038-2			AP-162/D	965-517D
048N			7717-115N				AP-206/N	965-622N
048D	10036D						AP-206/D	
049N	10190N			10236-1	1001	106-045	AP-237/N	965-625N
049D	10190D			10236-2			AP-237/D	965-625D

1/ This table is not a qualified products list or an approved source list. The vendors listed have submitted Certificates of Compliance (see A-A-55485) to DESC-EMM, however, parts may be ordered from any manufacturer who agrees to supply products that meet all the requirements of this CID

2/ Vendor commercial PIN's are given for reference only Do not use these numbers for ordering purposes

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:48Z
Check the source to verify that this is the current version before use.

TABLE I Suggested sources of supply - Continued 1/

Vendor CAGE number	Vendor name and address
07047	Milton Ross Company 262 Valley Road Warrington, PA 18976-2533 (215) 491-0600
08289	Delbert Blinn Company, Incorporated 1678 East Mission Boulevard Pomona, CA 91766-2007 (909) 623-1257
13103	Thermalloy, Incorporated 2021 West Valley View Lane Dallas, TX 75381-0839 (214) 243-4321
21071	Globe Plastics, Incorporated 13477 Twelfth Street Chino, CA 91710-9998 (909) 464-1520
24227	Teknational Industries, Incorporated 480 Clinton Avenue South Rochester, NY 14620-1103 (716) 232-1291
32559	Bivar, Incorporated 4 Thomas Irvine, CA 92718-2512 (714) 951-8808
53174	APX Plastics Company 3407 Dalworth Street Arlington, TX 76011-6815 (817) 275-3883
54355	Accessories for Electronics, Incorporated 800 Merrick Road Baldwin, NY 11510-3593 (516) 546-1751

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:48Z
Check the source to verify that this is the current version before use.

TABLE II. Supersession information. 1/

Superseded (old) PIN in accordance with MIL-M-38527/18· M38527/01-	Superseding (new) CID PIN A-55485/01-
030	030
031	031
032	032
033	033
034	034
035	035
036	036
037	037
038	038
039	039
040	040
041	041
042	042
043	043
044	044
045	045
046	046
047	047
048	048
049	049

1/ Complete PIN shall include a suffix letter to denote material.

MILITARY INTERESTS·

Custodians

Army - ER
Navy - EC
Air Force - 85

CIVIL AGENCY COORDINATING ACTIVITY

GSA - 7FXE

PREPARING ACTIVITY

DLA-ES

(Project 5999-0313-01)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:48Z
Check the source to verify that this is the current version before use.