MILITARY STANDARD

UNIT LOAD
FOR DOMESTIC AND OVERSEAS SHIPMENT

AMMONIUM PERCHLORATE

MIL-STD-1322-20
(NAVY)

11 DECEMBER 1991


SUPERSEDING
WR-53/20 (NAVY)
3 MARCH 1965

UNIT LOAD DATA


NUMBER OF DRUMS PER UNIT LOAD	4
GROSS WEIGHT OF ONE DRUM (FULL)	281 LBS
WEIGHT OF STEEL PALLET	72 LBS
WEIGHT OF WOOD AND STRAPPING (APPROX)	140 LBS
GROSS WEIGHT OF UNIT LOAD (APPROX)	1336 LBS △

△ DO NOT USE FOR SHIPPING WEIGHT

· FOR HAZARD CLASSIFICATION SEE NAVSEA OP 2165.



30 GAL. (U.S.)
FULL-REMOVABLE-HEAD
RULE 40 DRUM

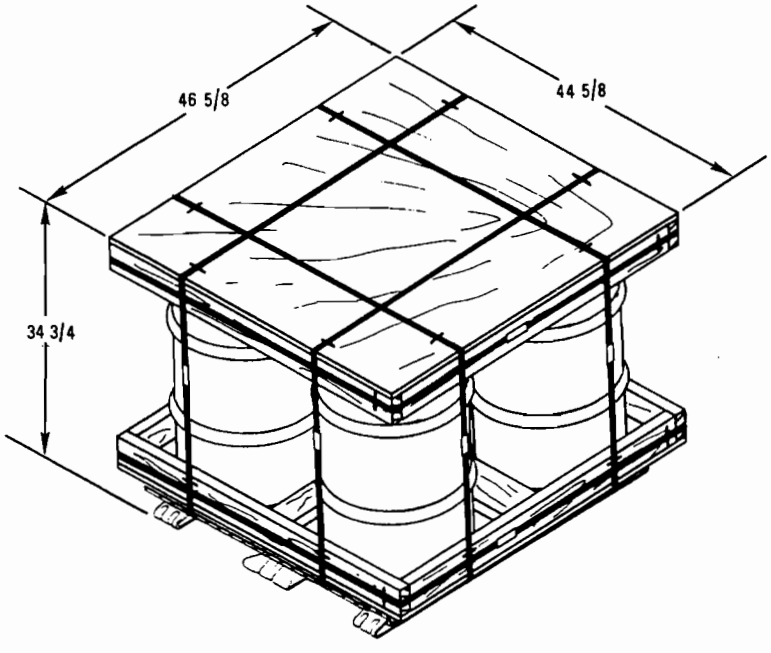

AMSC NO. - N/A

DISTRIBUTION STATEMENT A
APPROVED FOR PUBLIC RELEASE:
DISTRIBUTION IS UNLIMITED.

NOTES:

1. UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES.
2. FOR CROSS REFERENCE TO ASSOCIATED TRUCKLOADING, CONTAINERLOADING AND CARLOADING MILITARY STANDARDS, REFER TO INDEX TO STANDARDS, MIL-HDBK-236 (NAVY).

REV LTR	REVISION DESCRIPTION	DATE	TDA	SYSCOM
			APPROVAL	

FSC 8140

THIS UNIT LOAD IS AUTHORIZED AND RELEASED FOR DEPOT HANDLING AND STORAGE AND FOR SHIPMENT BY COMMON CARRIER.

E. Smalder — 12/11/91
SIGNATURE — TDA, WPNSTA EARLE — DATE

Gil Clemmons — 12/12/91
SIGNATURE — BY DIRECTION — DATE

REQUIREMENTS FOR CONSTRUCTION OF THIS UNIT LOAD SHALL CONSIST OF THIS DOCUMENT AND THE LATEST ISSUE OF MIL-STD-1322 (NAVY).

ORIGINATOR N. Fakeri — 11 Dec 91
DATE

WPNSTA EARLE, NEW JERSEY

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T23:51Z
Check the source to verify that this is the current version before use.

PALLETIZING PROCEDURE:

1. CONSTRUCT TOP AND BOTTOM FRAME ASSEMBLIES AS SHOWN IN DETAILS D AND E.
2. INSTALL GIRTHWISE STRAPPING, ITEM 2, AROUND THE TOP AND BOTTOM FRAME ASSEMBLIES WITH DOUBLE NOTCHED SEALS AS SHOWN IN DETAILS A AND C.
3. SECURE GIRTHWISE STRAPPING TO FRAME ASSEMBLIES WITH STAPLES, ITEM 16, AS SHOWN IN DETAILS A AND C.
4. THREAD LONGITUDINAL STRAPS, ITEM 3, BETWEEN THE FOURTH AND FIFTH WIRES OF THE PALLET DECK AS SHOWN IN DETAIL B.
5. POSITION BOTTOM FRAME ASSEMBLY ON THE PALLET DECK WITH EQUAL OVERHANG ON BOTH SIDES AND ENDS AS SHOWN IN DETAIL C.
6. POSITION FOUR DRUMS INTO THE BOTTOM FRAME ASSEMBLY AS SHOWN IN DETAIL C.
7. POSITION THE TOP FRAME ASSEMBLY OVER THE CONTAINERS AS SHOWN IN DETAIL A.
8. FEED LATERAL STRAPS, ITEM 4, UNDER THE PALLET DECK AND OVER THE LOAD AS SHOWN IN DETAIL A. TENSION AND DOUBLE NOTCH THE SEALS.
9. BRING LONGITUDINAL STRAPS, ITEM 3, OVER THE LOAD. TENSION AND DOUBLE NOTCH THE SEALS.
10. SECURE LATERAL AND LONGITUDINAL STRAPPING, ITEMS 3 AND 4, TO THE TOP AND BOTTOM FRAME ASSEMBLIES WITH STAPLES, ITEM 16, AS SHOWN IN DETAIL C.

MARKING: IN ADDITION TO ANY SPECIAL MARKING REQUIRED BY CONTRACT OR ORDER, THE UNIT LOAD SHALL BE MARKED IN ACCORDANCE WITH MIL-STD-1322 (NAVY).

DEPALLETIZING PROCEDURE:

DO NOT REMOVE GIRTHWISE STRAPPING OR STAPLES FROM THE PREFABRICATED TOP AND BOTTOM FRAME ASSEMBLIES.

1. REMOVE STAPLES FROM THE LATERAL AND LONGITUDINAL STRAPPING.
2. CUT AND REMOVE LATERAL AND LONGITUDINAL STRAPPING.
3. REMOVE TOP FRAME.
4. REMOVE CONTAINERS.
5. REMOVE BOTTOM FRAME.


NOTES:

1. UNLESS OTHERWISE SPECIFIED, ALL MATERIALS SHALL BE IN ACCORDANCE WITH THE BASIC DOCUMENT, MIL-STD-1322 (NAVY).
2. DO NOT USE TYPE I STRAPPING WITH POWER MACHINES.
3. ITEM 14 CAN BE MADE FROM 2 X 6 OR EQUIVALENT STOCK CUT DOWN IN WIDTH TO SIZE.
4. ITEM 15 CAN BE MADE FROM 2 X 4 OR EQUIVALENT STOCK CUT DOWN IN WIDTH TO SIZE.


AS REQ	16	STAPLES	STEEL	3/4 SIZE
2	15	SPACER, TOP	SEE NOTE 4	2 X 2 3/8 X 19
1	14	SPACER, TOP	SEE NOTE 3	2 X 4 3/8 X 41
2	13	SIDE PIECE, TOP	WOOD	2 X 4 X 43 5/8
2	12	END PIECE, TOP	WOOD	2 X 4 X 44 5/8
1	11	COVER	PLYWOOD	3/4 X 46 5/8 X 44 5/8
2	10	SPACER, BOTTOM	WOOD	2 X 4 X 18
1	9	SPACER, BOTTOM	WOOD	2 X 6 X 40
2	8	SIDE PIECE, BOTTOM	WOOD	2 X 4 X 42 1/2
2	7	END PIECE, BOTTOM	WOOD	2 X 4 X 43 1/2
1	6	BASE	PLYWOOD	3/4 X 45 1/2 X 43 1/2
6	5	STRAP SEAL	STEEL	3/4 SIZE
2	4	STRAP, LATERAL	STEEL	3/4 X .035 X 15 FT
2	3	STRAP, LONGITUDINAL	STEEL	3/4 X .035 X 15 FT
2	2	STRAP, GIRTHWISE	STEEL	3/4 X .035 X 17 FT
1	1	PALLET, MK 12 MOD 1	DWG 2645217	35 X 45 1/2 X 4 3/4
REQ.	**ITEM**	**DESCRIPTION**	**MAT'L/DWG**	**DIMENSIONS**

LIST OF MATERIALS


Source: https://assist.dla.mil -- Downloaded: 2026-10-23T23:51Z
Check the source to verify that this is the current version before use.

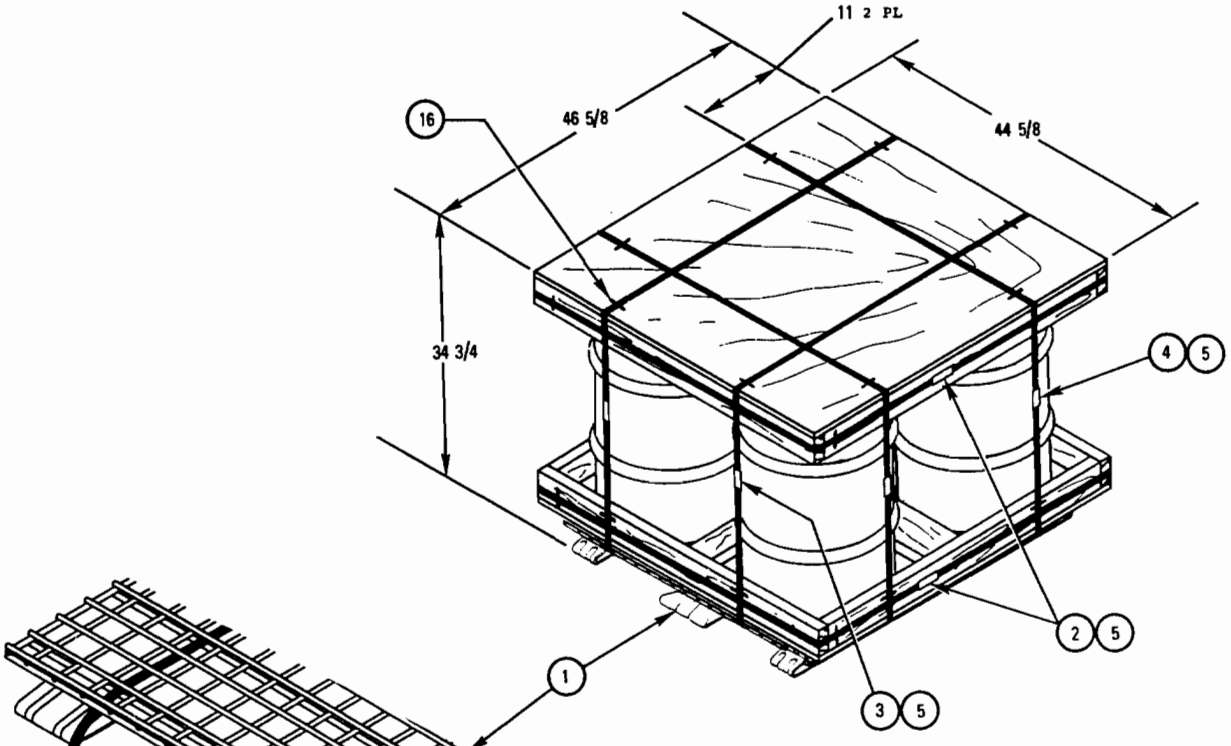

DETAIL A

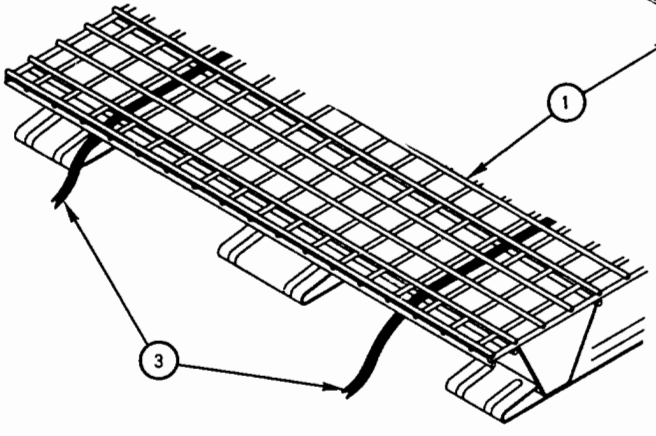


DETAIL B

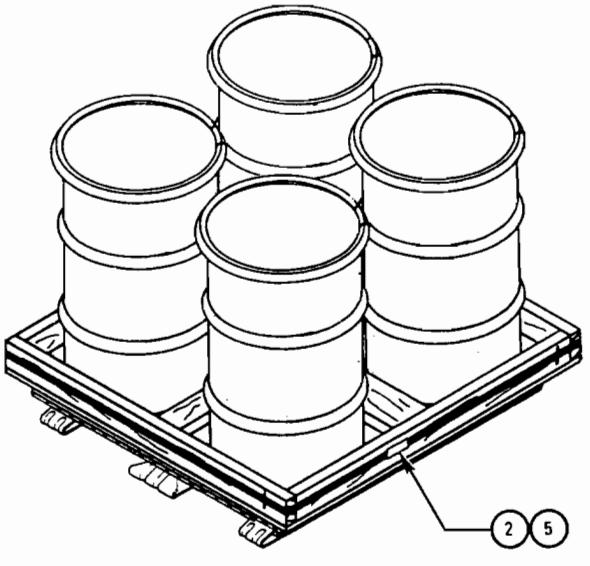

DETAIL C

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T23:51Z
Check the source to verify that this is the current version before use.

FRAME ASSEMBLY CONSTRUCTION

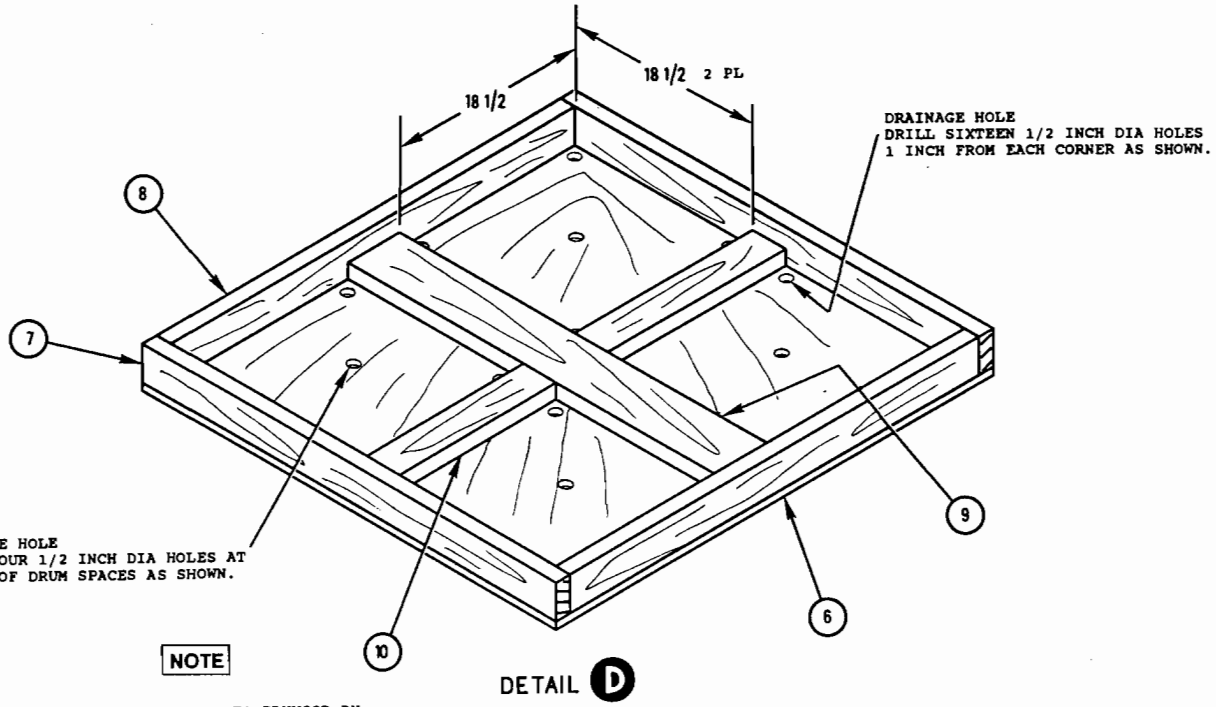


DETAIL D

BOTTOM FRAME

NOTE

SPACERS SHALL BE ATTACHED TO PLYWOOD BY NAILING THROUGH THE PLYWOOD AND INTO THE SPACERS WITH 6d NAILS. SIDE AND END PIECES SHALL BE ATTACHED IN THE SAME MANNER WITH 10d NAILS.

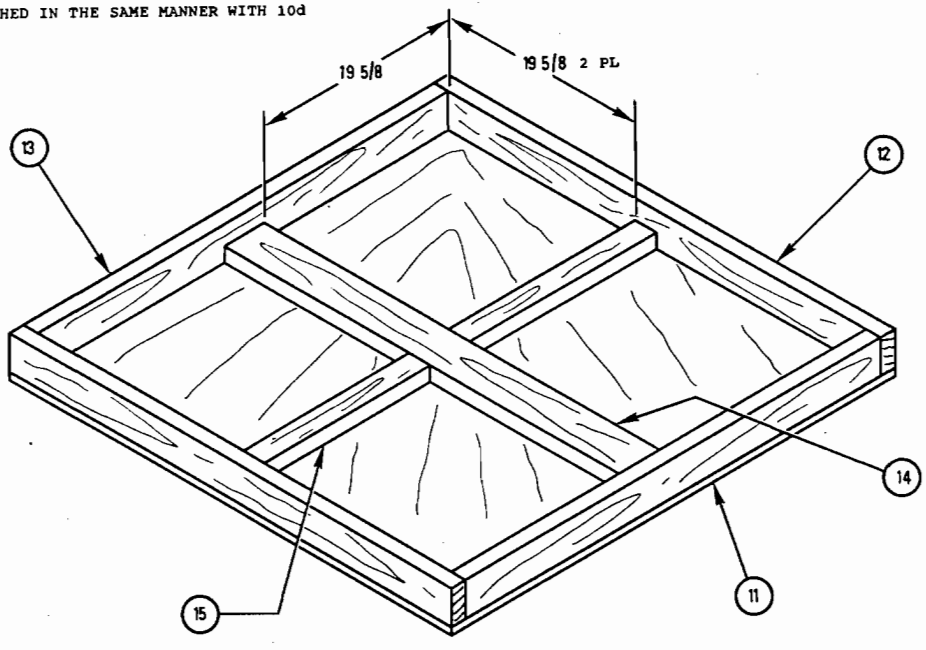

DETAIL E

TOP FRAME

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T23:51Z
Check the source to verify that this is the current version before use.