Department of the Navy 14 August 1969

PALLETIZING
DOMESTIC UNIT LOAD


20 MM AMMUNITION
(IN 20 MM AMMO BOX MK 3 MODS - ON MK 3 PALLET)

UNIT LOAD DATA


NUMBER OF ROUNDS PER CONTAINER	180
GROSS WEIGHT OF ONE CONTAINER (Lbs.)	120
NUMBER OF ROUNDS PER UNIT LOAD	3600
NUMBER OF CONTAINERS PER UNIT LOAD	20
WEIGHT OF PALLET (Lbs.)	94
WEIGHT OF UNIT LOAD (Lbs.)	2505
CUBE (Cu. Ft.)	35.8

DO NOT STACK MORE THAN 5 UNIT LOADS HIGH IN STORAGE

CLASS C EXPLOSIVES



20 MM AMMUNITION BOX
MK 3 & MODS
DWG 329494 & 564212

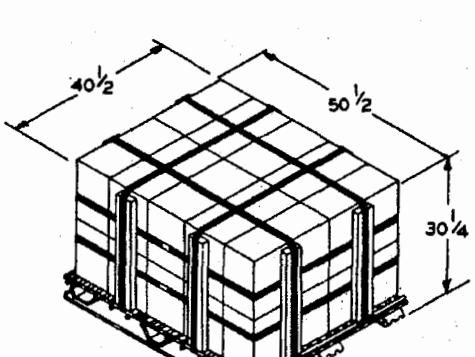

NOTES:
1. FOR GENERAL PALLETIZING REQUIREMENTS SEE MIL-STD-1322 (NAVY).
2. UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES.

MIL-STD NUMBER	ASSOCIATED PROCESS
1320-3	TRUCKLOADING
1325-8	CARLOADING

THIS UNIT LOAD IS AUTHORIZED AND RELEASED FOR [illegible] AND STORAGE AND FOR SHIPMENT BY COMMON CARRIER IN COMPLIANCE WITH DOT REGULATIONS.


Standards, https://assist.dla.mil -- Downloaded: 2026-10-23T2
Check the source to verify that this is the current version bef

PALLETIZING PROCEDURE


(a) THREAD STRAPPING, PC. 5, BETWEEN DECK WIRES OF PALLET, PC. 1. (SEE DETAIL "A")
(b) POSITION CONTAINERS ON PALLET, PC. 1.
(c) POSITION AND TENSION STRAPPING, PC. 4, AND DOUBLE CRIMP SEAL, PC. 7.
(d) POSITION BATTENS, PC. 3.
(e) TENSION STRAPPING, PC. 5, AND DOUBLE CRIMP SEAL, PC. 7.
(f) POSITION BATTENS, PC. 2, AND STRAPS, PC. 6, TENSION AND DOUBLE CRIMP SEAL, PC. 7.
(g) SECURE STRAP PCS. 5 AND 6 TO BATTEN WITH STAPLE, PC. 8.

MARKING:

IN ADDITION TO ANY SPECIAL MARKING REQUIRED BY CONTRACT OR ORDER, UNIT LOAD SHALL BE MARKED IN ACCORDANCE WITH MIL-STD-129.



DETAIL A

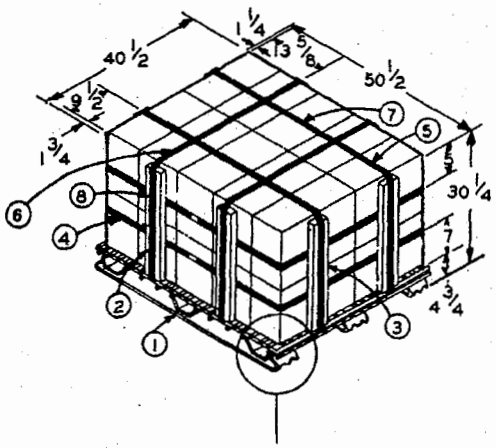

DETAIL A

DEPALLETIZING PROCEDURE

(a) CUT AND REMOVE STRAPPING, PCS. 5 AND 6.
(b) REMOVE BATTENS, PCS. 2 AND 3.
(c) CUT AND REMOVE STRAPPING, PC. 4.
(d) REMOVE CONTAINERS.

REQ.	ITEM	DESCRIPTION	MAT'L.	MAT'L. SPEC.	DIMENSIONS
1	1	PALLET, MK 3 MOD 0	STEEL	544200	40 X 48
4	2	SIDE BATTEN	WOOD, ROUGH	MM-L-751	2 X 4 X 24
4	3	END BATTEN	WOOD, ROUGH	MM-L-751	2 X 4 X 24
2	4	STRAPPING GIRTH	STEEL, COATED	QQ-S-781 TY. I CL. A OR B	3/4 X .035 X 16 FT.
2	5	STRAPPING LENGTH	STEEL, COATED	QQ-S-781 TY. I CL. A OR B	3/4 X .035 X 14 FT.
2	6	STRAPPING WIDTH	STEEL, COATED	QQ-S-781 TY. I CL. A OR B	3/4 X .035 X 12 FT. 6
6	7	SEAL	STEEL, COATED	COM'L	3/4 X 22 GA. MIN.
24	8	STAPLE	STEEL, COATED	COM'L	1"

LIST OF MATERIALS

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T
Check the source to verify that this is the current version be