MIL-S-43669A

8 August 1974
SUPERSEDING
MIL-S-43669
30 September 1969

MILITARY SPECIFICATION

STAND, LECTURE, ALUMINUM, FOLDING

This specification is approved for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 Scope. This specification covers one type and size of folding, aluminum lecture stand (see 6.1).

2. APPLICABLE DOCUMENTS

2.1 The following documents, of the issue in effect on date of invitation for bids or request for proposal, form a part of this specification to the extent specified herein:

SPECIFICATIONS

FEDERAL

PPP-B-601	-	Boxes, Wood, Cleated-Plywood
PPP-B-621	-	Boxes, Wood, Nailed and Lock-Corner
* PPP-B-636	-	Boxes, Shipping, Fiberboard
PPP-C-843	-	Cushioning Material, Cellulosic

MILITARY

MIL-L-10547	-	Liners, Case, and Sheet, Overwrap, Water-Vaporproof or Waterproof, Flexible

STANDARDS

MILITARY

MIL-STD-105	-	Sampling Procedures and Tables for Inspection by Attributes
MIL-STD-129	-	Marking for Shipment and Storage

(Copies of specifications, standards, drawings, and publications required by suppliers in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

FSC 7195

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:59Z
Check the source to verify that this is the current version before use.

2.2 Other publications. The following documents form a part of this specification to the extent specified herein. Unless a specific issue is identified, the issue in effect on date of invitation for bids or request for proposal shall apply:

National Fire Protection Association (NFPA)

Standard No. 70 - National Electrical Code

(Application for copies should be addressed to the National Fire Protection Association, 60 Batterymarch Street, Boston, MA 02110.)

National Motor Freight Traffic Association, Inc., Agent

National Motor Freight Classification

(Application for copies should be addressed to the American Trucking Associations, Inc., Tariff Order Section, 1616 P Street, N.W., Washington, DC 20036.)

Uniform Classification Committee, Agent

Uniform Freight Classification

* (Application for copies should be addressed to the Uniform Classification Committee, Room 1106, 222 South Riverside Plaza, Chicago, IL 60606.)

(Technical society and technical association specifications and standards are generally available for reference from libraries. They are also distributed among technical groups and using Federal Agencies.)

3. REQUIREMENTS

* 3.1 First article. When specified (see 6.2), the supplier shall furnish a sample of the stand, lecture, folding to be procured under this specification for first article inspection and approval (see 4.2, 6.2 and 6.3).

* 3.2 Standard product. The lecture stand delivered under this specification shall be the manufacturer's current commercial product except for changes necessary to comply with this specification. All like items furnished on any one contract, including parts and subassemblies thereof, shall be new and interchangeable.

* 3.3 Materials. Materials not definitely specified shall be of the quality normally used for the purpose by the manufacturer in his commercial lecture stands provided the completed item complies with all provisions of this specification.

Source: https://assist.dla.mil -- Downloaded: 202610-21T21:59Z
Check the source to verify that this is the current version before use.

* 3.4 Design and construction. The lecture stand shall be of the folding type not requiring the use of fasteners for erection, and shall have exposed panels fabricated of a vinyl clad aluminum alloy material. The exterior vinyl side shall have a walnut wood grain finish. The design of the stand shall be as shown on figures 1 and 2. Reinforcing or stiffening members shall be located so that the members are not subject to damage, distortion, or bending by any normal action of the users. Continuous hinges shall permit the top panel, side panels, and the shelf to fold inwardly. The folded stand shall not exceed 5 inches in depth. The hinges and the brackets shall be riveted. The riveting shall be in accordance with the manufacturer's current commercial practice. The weight of the stand, including the light fixture specified in 3.4.1, shall be not less than 20 pounds and not more than 24 pounds. The hinges shall not bind and the stand shall not become distorted as a result of testing as specified in 4.4.1.

* 3.4.1 Light fixture. The light fixture shall be similar to figure 2 and shall consist of an assembly of a lamp holder with pivoting shade, two 40-watt tubular incandescent lamps, a push button type switch, and not less than 11 feet of electrical extension cord terminating in a molded on attachment plug. Electrical wiring shall conform to the applicable provisions of the National Electrical Code (NFPA No. 70). Acceptable evidence of meeting this requirement may be the manufacturer's certified statement that the electrical system conforms to NFPA No. 70.

3.5 Finish. The walnut wood grain vinyl finish (see 3.4) and the interior surfaces shall be finished in accordance with the manufacturer's current commercial practice.

* 3.6 Marking.

3.6.1 Marking for identification. The manufacturer's identification or readily identifiable trademark shall be stenciled or stamped on the interior surface of one of the panels. The application of the identification marking shall be in accordance with the manufacturer's current commercial practice.

* 3.6.2 Erection instructions. Complete detailed step by step erection instructions shall be permanently affixed to the top surface of the interior shelf. The instructions may be in the form of a sheet glued to the shelf, decalcomania, stenciling or lettering directly on the shelf surface.

* 3.7 Workmanship. The surfaces of the lecture stand shall be free from lifting or incomplete bonding of vinyl cladding, scratches, area of no finish, streaks, cracks, chips, foreign material imbedded, slivers, rough or sharp edges. Components shall not be broken, cracked, split, or malformed.

Source: https://assist.dla.mil -- Downloaded: 202610-21T21:59Z
Check the source to verify that this is the current version before use.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. Unless otherwise specified in the contract or purchase order, the supplier is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified in the contract or order, the supplier may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure supplies and services conform to prescribed requirements.

* 4.2 First article. When a first article is required, the stand shall be examined for the defects listed in table I, dimensions and weight specified, and tested in accordance with 4.4.1. The presence of any defect or failure of the test shall be cause for rejection of the first article.

* 4.3 Quality conformance inspection. Except as otherwise specified herein, sampling for inspection shall be performed in accordance with provisions set forth in MIL-STD-105.

4.3.1 Component and material inspection. In accordance with 4.1, components and materials shall be inspected and tested in accordance with all the requirements of referenced specifications, drawings, and standards unless otherwise excluded, amended, modified, or qualified in this specification or applicable purchase document.

4.3.2 End-item inspection. The lot shall be all the lecture stands offered for inspection at one time. The sample unit shall be one lecture stand.

* 4.3.2.1 Visual examination. The lecture stand shall be examined for the defects in table I. The inspection level shall be II and the AQL shall be 2.5 for major defects and 6.5 for total defects, expressed in terms of defects per hundred units.

TABLE I. Classification of defects

Examine	Defect	Classification Major	Minor
Finish	Scratches, area of no finish, streaks, foreign matter imbedded, chips, cracks, slivers, rough or sharp edges.		X
* Construction and workmanship	Components not as specified.	X	
	Not folding type.	X	
	Any component broken, cracked, split or malformed i.e., brackets, hinges, lamp, switch, cord.	X	

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:59Z
Check the source to verify that this is the current version before use.

TABLE I. Classification of defects (cont'd)

	Examine	Defect	Classification Major	Minor
*	Construction and workmanship (cont'd)	Continuous hinges do not permit the top panels, side panels and shelf to fold inwardly.	X	
*		Any member subject to damage under normal use conditions.	X	
		Lamp, light switch inoperable.	X	
*		Lifting or incomplete bonding of vinyl cladding	X	
	Riveting	Loose, missing, split, cracked, not flush.		X
	Marking identification	Missing, incomplete, not legible.		X
*	Erection instructions	Missing, incorrect, illegible, or in wrong location.		X

* 4.3.2.2 Dimensional and weight examinations. Examinations shall be made of the stand for compliance with dimensions and weight specified. Any dimensions or weight that is not within the specified tolerance shall be classified as a defect. The inspection level shall be S-2 with an AQL of 4.0, expressed in terms of defects per hundred units.

4.3.3 Testing of the end item. The stand shall be tested in accordance with 4.4.1. Failure of the test shall constitute a defect. The inspection level shall be S-2 with an AQL of 2.5 defects, expressed in terms of defects per hundred units.

* 4.3.4 Certificate examination. Certificate of compliance, approval labels or listing marks for codes and standards, as applicable, that are submitted as proof of compliance with specification requirements shall be examined and validated.

4.3.5 Examination of preparation for delivery. An examination shall be made to determine that packaging, packing and marking as required by section 5 are complied with. Defects shall be as indicated in table II. The sample unit shall be one shipping container fully prepared for delivery. The lot shall be all containers offered for inspection at one time. The inspection level shall be S-2 and the acceptable quality level shall be 4.0, expressed in terms of defects per hundred units.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:59Z
Check the source to verify that this is the current version before use.

TABLE II. Examination of preparation for delivery

Examination	Defect
Markings, exterior and interior	Omitted, incorrect; illegible; of improper size, location, sequence, or method of application.
Materials	Component missing or damaged.
Workmanship	Inadequate application of components, such as lamps not completely wrapped in cushioning material, or case liner not sealed.
Contents	Number per container is more than required.

4.3.5.1 Examination of shipping containers. Examination for defects in closure and strapping of shipping containers shall be in accordance with the appendix of the applicable container specification.

4.4 Test.

* 4.4.4 Folding and distortion test. The lecture stand shall be erected and collapsed at least two complete cycles in accordance with the suppliers erection instructions. Between cycles, not less than a 30 pound load shall be uniformly applied along all four top edges, in turn, with the force applied on a plane diagonal to the lower opposing edge for not less than 30 seconds on each edge. If necessary, the base may be restrained to prevent movement or tipping of the assembled stand. Any evidence of binding hinges, or permanent distortion of the lecture stand shall constitute failure of the test (see 3.4).

5. PREPARATION FOR DELIVERY

5.1 Packaging. Packaging shall be level A or C as specified (see 6.2).

5.1.1 Level A. The lamps shall be removed from the light fixture and completely wrapped in minimum 1/2 inch thick cushioning material conforming to type I or II, class A of PPP-C-843 and placed in a commercial fiberboard box. Each lecture stand shall be folded to its minimum cube and, together with the boxed lamps, shall be packaged in a snug fitting fiberboard box conforming to style FPF, type CF, variety SW, or type SF, class domestic, grade 200 of PPP-B-636. Fiberboard inserts shall be used to fill all voids within the box. Closure shall be in accordance with method II of the appendix of PPP-B-636.

Source: https://assist.dla.mil -- Downloaded: 202640-21T21:59Z
Check the source to verify that this is the current version before use.

5.1.2 Level C. Lecture stands shall be packaged to afford adequate protection against physical damage during shipment from the supply source to the first receiving activity. The supplier may use his standard practice when it meets this requirement.

5.2 Packing. Packing shall be level A, B or C as specified (see 6.2).

5.2.1 Level A. Five lecture stands, packaged as specified in 5.1, shall be packed in a snug-fitting cleated plywood or nailed wood shipping container conforming to overseas type of PPP-B-601; or class 2, style 2 or 4 of PPP-B-621. Each shipping container shall be provided with type I or II, grade C case liner conforming to MIL-L-10547. Closure and strapping shall be in accordance with the appendix of the applicable container specification.

5.2.2 Level B. Five lecture stands, packaged as specified in 5.1, shall be packed in a snug-fitting, cleated plywood or nailed wood shipping container conforming to domestic type, style A or B of PPP-B-601; or class 1, style 2 or 4 of PPP-B-621. Closure and strapping shall be in accordance with the appendix of the applicable container specification.

5.2.3 Level C. Lecture stands, packaged as specified in 5.1, shall be packed in a manner to insure carrier acceptance and safe delivery at destination at the lowest transportation rate for such supplies. Containers shall be in accordance with Uniform Freight Classification Rules or National Motor Freight Rules, as applicable.

5.3 Marking. In addition to any special marking required by the contract or order, interior packages and shipping container shall be marked in accordance with MIL-STD-129.

6. NOTES

6.1 Intended use. The lecture stand covered by this specification is intended for use by a lecturer or a speaker to enable him to read from outline copy, easily and comfortably while standing.

6.2 Ordering data. Procurement documents should specify the following:

(a) Title, number, and date of this specification.
* (b) When a first article is required (see 3.1 and 4.2).
(c) Selection of applicable levels of packaging and packing (see 5.1 and 5.2).

* 6.3 First article. When a first article is required, it shall be inspected and approved under the appropriate provisions of ASPR 7-104.55. The first article should be a preproduction sample, initial production item or other

Source: https://assist.dla.mil -- Downloaded: 202610-21T21:59Z
Check the source to verify that this is the current version before use.

specific item described under the definition of a first article in the ASPR. The contracting officer should specify the appropriate type of first article and the number of units to be furnished. The contracting officer should include specific instructions in all procurement instruments regarding arrangements for inspection and approval of the first article.

* 6.4 The margins of this specification have been marked with an asterisk (*) to indicate where changes (additions, modifications, corrections, deletions) from previous issue were made. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and suppliers are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations and relationship to the last previous issue.

Custodians:

Army - GL
Navy - YD
Air Force - 84

User activity:

Navy - MC

Preparing activity:

Army - GL

Project No. 7195-0066

Source: https://assist.dla.mil -- Downloaded: 202640-21T21:59Z
Check the source to verify that this is the current version before use.

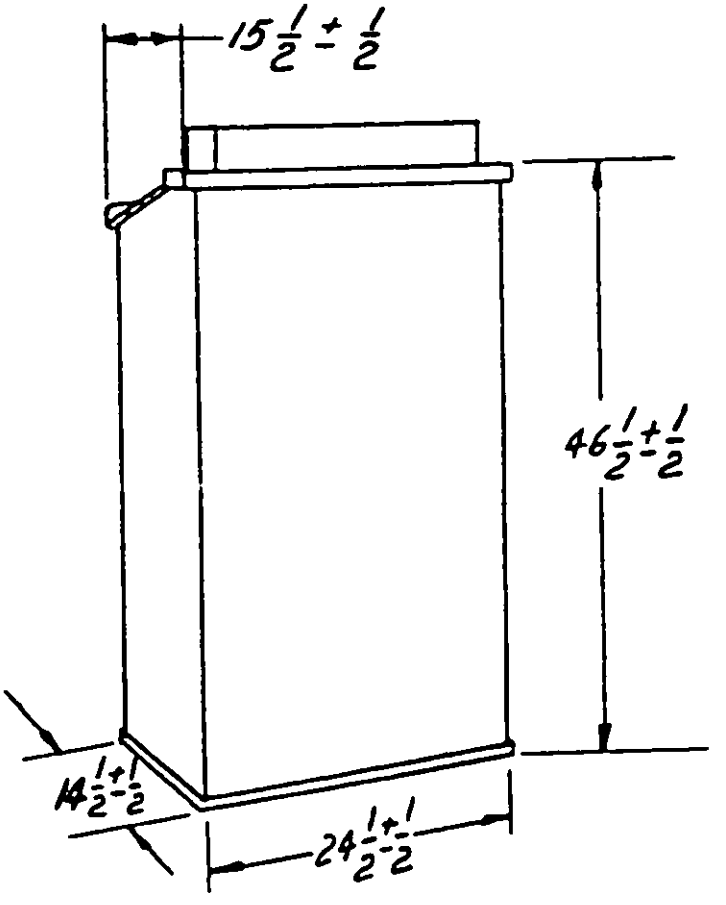


FIG. 1 STAND, LECTURE, FRONT VIEW

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:59Z
Check the source to verify that this is the current version before use.

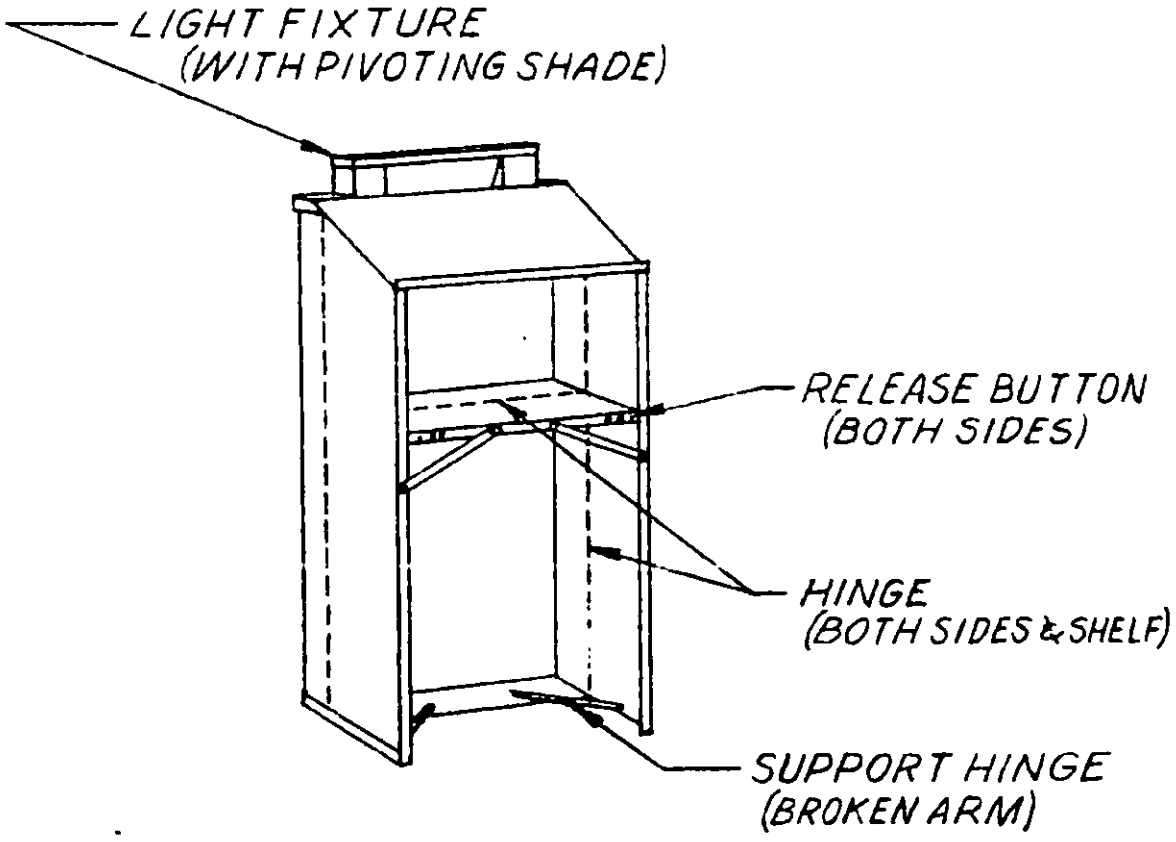


FIG. 2 STAND LECTURE, REAR VIEW

Source: https://assist.dla.mil -- Downloaded: 20261O-21T21:59Z
Check the source to verify that this is the current version before use.

FOLD

U.S. Army Natick Laboratories
Natick, Massachusetts 01760

POSTAGE AND FEES PAID
DEPARTMENT OF THE ARMY
DOD – 314

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300
STSNL-TD

Commanding General
U.S. Army Natick Laboratories
Natick, Massachusetts 01760

FOLD

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:59Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

OMB Approval
No. 22-R255

INSTRUCTIONS: The purpose of this form is to solicit beneficial comments which will help achieve procurement of suitable products at reasonable cost and minimum delay, or will otherwise enhance use of the document. DoD contractors, government activities, or manufacturers/ vendors who are prospective suppliers of the product are invited to submit comments to the government. Fold on lines on reverse side, staple in corner, and send to preparing activity. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements. Attach any pertinent data which may be of use in improving this document. If there are additional papers, attach to form and place both in an envelope addressed to preparing activity.

DOCUMENT IDENTIFIER AND TITLE
STAND, LECTURE, ALUMINUM, FOLDING MIL-S-43669A

NAME OF ORGANIZATION AND ADDRESS

CONTRACT NUMBER

MATERIAL PROCURED UNDER A
☐ DIRECT GOVERNMENT CONTRACT ☐ SUBCONTRACT

1. HAS ANY PART OF THE DOCUMENT CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE?
   A. GIVE PARAGRAPH NUMBER AND WORDING.

   B. RECOMMENDATIONS FOR CORRECTING THE DEFICIENCIES

2. COMMENTS ON ANY DOCUMENT REQUIREMENT CONSIDERED TOO RIGID

3. IS THE DOCUMENT RESTRICTIVE?
   ☐ YES ☐ NO *(If "Yes", in what way?)*

4. REMARKS

SUBMITTED BY *(Printed or typed name and address - Optional)*

TELEPHONE NO.

DATE

DD FORM 1 JAN 72 1426 REPLACES EDITION OF 1 JAN 68 WHICH MAY BE USED

Source: https://assist.dla.mil -- Downloaded: 202610-21T21:59Z
Check the source to verify that this is the current version before use.