


MS35430B is inactive for new design as of 18 October 2000.


FED SUP CLASS
5940


This document has been promulgated by the Department of Defense as the military standard to limit the selection of the item, product or design covered herein in engineering, design and procurement. This standard shall become effective not later than 90 days after the latest date of approval shown.











OPTIONAL WIRE GRIP DESIGN

DASH NO.	Ⓑ	WIRE SIZE AWG NON	STUD SIZE	A HOLE DIA MIN	A HOLE DIA MAX	B	C	D ± 3/64	E ± 3/64	F ± 1/32	H ±.003
1			2	.089	.096		9/64	29/64	3/32	17/64	.016
2	050-8376										
3	050-8380		4	.115	.127						.020
4	050-8384	14-20	6	.141	.153	5/64	9/32		5/32		
5	050-8388		8	.167	.179						.032
6	101-8337		10	.193	.205						
7	050-8388		4	.115	.127						.020
8	050-8388	10-12	6	.141	.153	5/32	5/16	9/16	3/16	25/64	
9	050-8378		8	.167	.179						.032
10	097-2812		10	.193	.205						
11	050-8378		6	.141	.153						
12	050-8382	6-8	8	.167	.179	3/16			5/16		.040
13	097-2813		10	.193	.205						
27	101-8380	14-20	6	.141	.153	1/16	1/4	1/2	5/32	5/16	.032

Ⓑ DASH NO. 1: REV DIM. "D" & "F"

Ⓑ FOR CHANGES SEE SHEETS 2 & 3

AMSC N/A 23 July 56, Ⓑ 10 February 1961
REVISED 5 July 65


CUSTODIANS Ord Navy	OTHER INT. a-Sig C,TC,CE e-Wep,Docks M-	MILITARY STANDARD TERMINAL, LUG, SOLDER TYPE, COPPER STAMPING ONE HOLE	MS35430
GOVERNMENT SPECIFICATION MIL-T-15059	REFERENCES		SHEET 1 OF 3


DD FORM 672-1


Source: https://assist.dla.mil -- Downloaded: 2026-10-23T17:23Z
Check the source to verify that this is the current version before use.

The Government drawings, specifications, or other data are used for any purpose other than in connection with a definitely related Government procurement operation, the United States Government thereby incurs no responsibility, nor any obligation whatsoever; and the fact that the Government may have formulated, furnished, or in any way supplied the said drawings, specifications, or other data is not to be regarded by implication or otherwise as in any manner licensing the holder or any other person or corporation, or conveying any rights or permission to manufacture, use or sell any patented invention that may in any way be related thereto.


FED SUP CLASS
5940

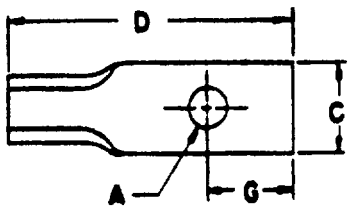





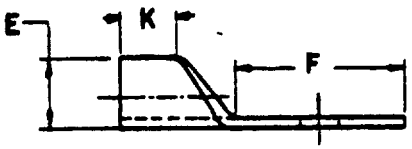

DASH NO.	B	WIRE SIZE AWG NOM	STUD SIZE	A HOLE DIA MIN	A HOLE DIA MAX	B	C	D	E	F	G	H ±.003	K
14	[illegible]		6	.141	.153		5/16	1-3/32		19/32	11/32		1/4
15	[illegible]							1			5/32		1/8
16	[illegible]	10				1/8		3/4	3/16	7/16	1/4	.032	3/16
17	[illegible]		10	.193	.205		3/8	1-3/16		5/8	5/16		
18	[illegible]							1-1/4		3/4	3/8		1/4







DASH NO.	B	WIRE SIZE AWG NOM	STUD SIZE	A HOLE DIA MIN	A HOLE DIA MAX	B	C	D	E	F	G	H ±.003
19		1-2	1/4	.258	.285	13/32	9/16	1-19/32	25/32	31/32	11/32	.091
20			5/16	.320	.347		11/16					
21			3/8	.383	.410							
22		0-00	5/16	.320	.347	1/2	3/4	1-11/16	53/64	1.	3/8	
23			3/8	.383	.410							
15	[illegible]	10	10	.193	.205	1/8	5/16	19/32	3/16	—	5/32	.032

APPROVED 5 July 55 REVISED

B

CUSTODIANS: One Ships
OTHER INT.: A- Sig C, TC, CE; B- Wep, Docks; M-
PROCUREMENT SPECIFICATION: MIL-T-15659
SUPERSEDES:

MILITARY STANDARD
TERMINAL, LUG, SOLDER TYPE, COPPER STAMPING, ONE HOLE


MS35430

SHEET 2 OF 3

DD FORM 672-1

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T17:23Z
Check the source to verify that this is the current version before use.

FED SUP CLASS
5940

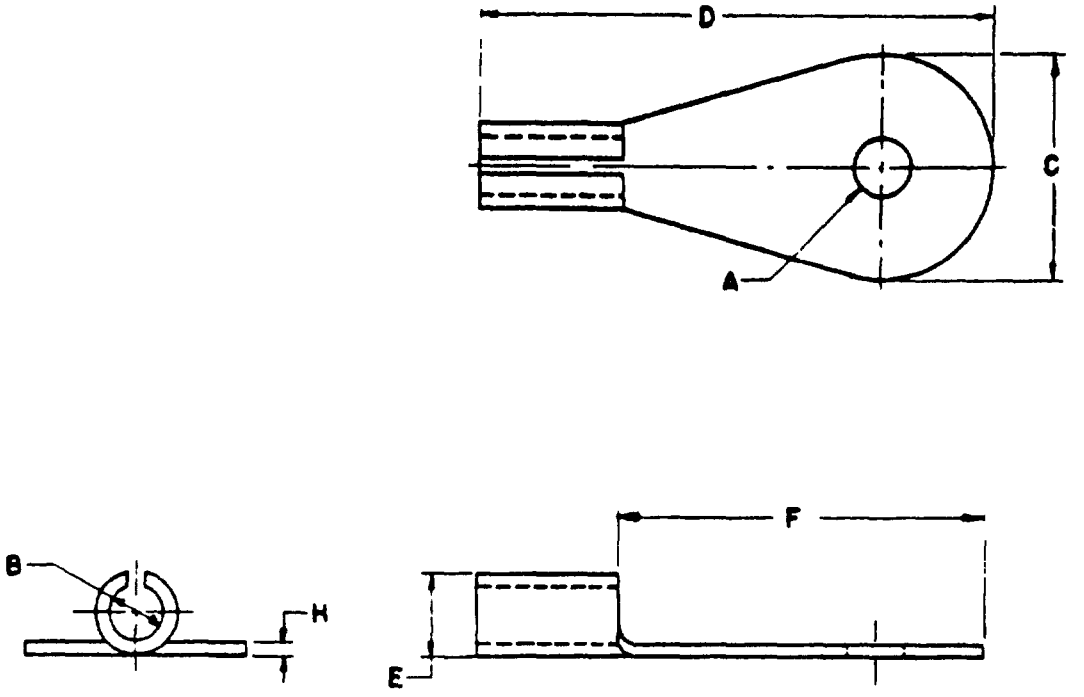

DASH NO.	~~PART~~ (B)	WIRE SIZE AWG NOM	STUD SIZE	A HOLE DIA MIN	A HOLE DIA MAX	B DIA	C DIA	D	E	F	H ±.003
24	~~MS3570~~	10	4	.115	.127	1/8	9/32	1-1/8	3/16	53/64	.032
25	~~MS3571~~		10	.193	.205		3/8	13/16		15/32	
26	~~MS3572~~							1-1/8		13/16	

MATERIAL: COPPER, ANNEALED - SPECIFICATION QQ-C-576.

FINISH: HOT TIN DIP OR ELECTRODEPOSITED TIN ALL OVER, MINIMUM THICKNESS .0005 INCHES.

NOTES: 1. ALL DIMENSIONS IN INCHES. TOLERANCES FRACTIONAL ± 1/64 UNLESS OTHERWISE SPECIFIED.

2. REMOVE ALL BURRS.

3. REFERENCED DOCUMENTS OF ISSUE IN EFFECT ON DATE OF INVITATION FOR BIDS SHALL APPLY.

4. THE MS PART NUMBER CONSISTS OF THE MS NUMBER PLUS THE DASH NUMBER.

APPROVED 5 July 55 REVISED

(B)

CUSTODIANS: Ord, Navy
OTHER INT: A-Sig C,TC,CE; B-Wep,Docks; AF.
PROCUREMENT SPECIFICATION: MIL-T-15659
REFERENCES:

MILITARY STANDARD
TERMINAL, LUG, SOLDER TYPE, COPPER STAMPING, ONE HOLE

MS35430

SHEET 3 OF 3

DD FORM 1 OCT 61 672-1

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T17:23Z
Check the source to verify that this is the current version before use.