

FED SUP CLASS
5307

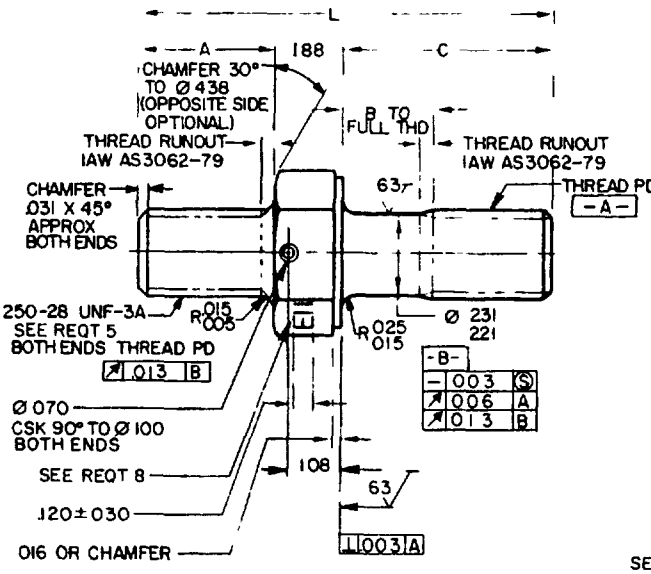

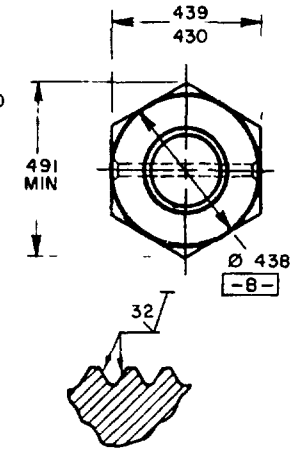

SECTION THRU THREAD PROFILE
BOTH ENDS

TABLE I DASH NUMBERS AND DIMENSIONS

DASH NUMBER	A	B +.000 -.060	C	L REF	APPROX WEIGHT LBS/100
-001	438	1/	500	1 125	1 86
-002	438	1/	562	1 188	1 92
-003	438	1/	625	1 250	1 98
-004	438	1/	688	1 312	2 06
-005	438	1/	750	1 375	2 12
-006	438	1/	812	1 438	2 20
-007	.438	125	.875	1 500	2 26
-008	438	188	938	1 562	2 34
-009	438	.250	1 000	1 625	2 40
-010	438	312	1 062	1 688	2 49
-011	438	375	1 125	1 750	2 54
-012	438	438	1 188	1 812	2 63
-013	.438	500	1 250	1 875	2 68
-014	.438	562	1 312	1 938	2 77
-015	438	625	1.375	2 000	2 83
-016	438	688	1 438	2 062	2 91
-017	438	750	1 500	2 125	2 97
-018	438	812	1.562	2 188	3 05
-019	.438	875	1 625	2 250	3 11
-020	438	938	1 688	2 312	3 19
-021	.438	1.000	1 750	2 375	3 25
-022	438	1.062	1 812	2 438	3 32
-023	.438	1 125	1.875	2 500	3 39
-024	438	1 188	1 938	2 562	3 48
-025	.438	1 250	2 000	2 625	3 53

DASH NUMBER	A	B +.000 -.060	C	L REF	APPROX WEIGHT LBS/100
-050	500	1/	500	1 188	1 92
-051	500	1/	562	1 250	1 98
-052	500	1/	625	1 312	2.06
-053	500	1/	688	1 375	2 12
-054	500	1/	750	1 438	2.20
-055	500	1/	812	1 500	2 26
-056	500	125	875	1 562	2 34
-057	500	188	938	1 625	2 40
-058	500	250	1 000	1 688	2 49
-059	500	312	1 062	1 750	2 54
-060	500	375	1 125	1 812	2 63
-061	500	438	1 188	1 875	2 68
-062	500	500	1 250	1 938	2 77
-063	500	562	1 312	2 000	2 83
-064	500	625	1.375	2 062	2 91
-065	500	688	1 438	2 125	2 97
-066	500	750	1 500	2 188	3 05
-067	500	812	1 562	2 250	3.11
-068	500	875	1 625	2 312	3.19
-069	500	938	1 688	2 375	3.25
-070	500	1 000	1.750	2 438	3 32
-071	500	1 062	1 812	2 500	3 39
-072	500	1 125	1 875	2 562	3 48
-073	500	1 188	1 938	2 625	3 53
-074	500	1 250	2 000	2 688	3 62

(B) ENTIRE STANDARD REVISED

APPROVED 24 FEB 60 REVISED (B) 22 MAY 86

USER ACTIVITIES

REVIEWER ACTIVITIES
AIR FORCE-82
DLA-IS

DISTRIBUTION STATEMENT A Approved for public release, distribution is unlimited
This military standard is approved for use by all Departments and Agencies of the Department of Defense
Selection for all new engineering and design applications and for repetitive use shall be made from this document, when applicable

AMSC N/A

P A NAVY-AS Other Cust ARMY-AR AIR FORCE-99	INTERNATIONAL INTEREST	TITLE STUD, SHOULDERED, HEXAGON WRENCHING, DRILLED, STEEL, .250-28 UNF-3A X .250-28 UNF-3A	MILITARY STANDARD MS9310
PROCUREMENT SPECIFICATION AMS 7452-73	SUPERSEDES:		PAGE 1 OF 2

DD FORM 672-1 (COORDINATED) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE 5307-0444

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T13:14Z
Check the source to verify that this is the current version before use.

USER ACTIVITIES.

REVIEWER ACTIVITIES:
AIR FORCE-82
DLA-IS

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document, when applicable.

TABLE I DASH NUMBERS AND DIMENSIONS - CONTINUED

DASH NUMBER	A	B +.000 - 060	C	L REF	APPROX WEIGHT LBS/100
-100	562	1/	500	1.250	1 98
-101	562	1/	562	1 312	2 06
-102	562	1/	625	1 375	2 12
-103	562	1/	688	1.438	2 20
-104	562	1/	750	1.500	2 26
-105	562	1/	812	1 562	2.34
-106	562	125	.875	1 625	2.40
-107	562	.188	938	1 688	2 49
-108	562	250	1 000	1 750	2 54
-109	562	312	1 062	1.812	2.63
-110	562	375	1.125	1.875	2.68
-111	.562	.438	1.188	1.938	2 77
-112	.562	.500	1.250	2.000	2.83
-113	562	562	1 312	2 062	2 91
-114	562	625	1 375	2 125	2.97
-115	562	688	1 438	2 188	3 05
-116	562	750	1 500	2 250	3 11
-117	562	812	1.562	2 312	3.19
-118	.562	.875	1.625	2 375	3.25
-119	562	.938	1 688	2 438	3 32
-120	562	1.000	1 750	2 500	3.39
-121	562	1 062	1 812	2 562	3 48
-122	562	1 125	1 875	2 625	3 53
-123	562	1 188	1 938	2 688	3 62
-124	.562	1.250	2 000	2 750	3.67

DASH NUMBER	A	B + 000 - 060	C	L REF	APPROX WEIGHT LBS/100
-150	625	1/	500	1 312	2 06
-151	625	1/	562	1 375	2 12
-152	625	1/	625	1 438	2 20
-153	625	1/	688	1 500	2 26
-154	625	1/	750	1 562	2 34
-155	.625	1/	812	1 625	2 40
-156	625	125	875	1 688	2.49
-157	.625	188	938	1 750	2 54
-158	625	250	1 000	1 812	2 63
-159	625	312	1 062	1 875	2 68
-160	625	375	1 125	1 938	2 77
-161	625	438	1 188	2.000	2 83
-162	625	500	1 250	2 062	2 91
-163	.625	562	1 312	2 125	2 97
-164	625	625	1 375	2 188	3 05
-165	625	688	1 438	2 250	3 11
-166	625	750	1 500	2 312	3 19
-167	625	812	1.562	2 375	3 25
-168	625	875	1 625	2 438	3 32
-169	625	938	1 688	2 500	3 39
-170	625	1 000	1 750	2 562	3 48
-171	625	1 062	1 812	2 625	3 53
-172	625	1 125	1 875	2 688	3 62
-173	625	1 188	1 938	2 750	3 67
-174	625	1 250	2 000	2 812	3 76

1/ THREAD TO HEAD MAXIMUM TWO INCOMPLETE THREADS

REQUIREMENTS.

1 MATERIAL STEEL IN ACCORDANCE WITH AMS 6322-80

2 FINISH CADMIUM PLATE IN ACCORDANCE WITH AMS 2400-80

3 HARDNESS 26-32HRC

4 DIMENSIONING AND TOLERANCING DIMENSIONING AND TOLERANCING SHALL BE IN ACCORDANCE WITH ANSI Y14 5M

5 THREADS: THREADS SHALL BE IN ACCORDANCE WITH FED-STD-H28/2 ACCEPTABILITY OF SCREW THREADS SHALL BE IN ACCORDANCE WITH FED-STD-H28/20, SYSTEM 22

6 SURFACE TEXTURE SURFACE TEXTURE SHALL BE IN ACCORDANCE WITH AS291-64

7 MAGNETIC PARTICLE INSPECTION: MAGNETIC PARTICLE INSPECTION SHALL BE IN ACCORDANCE WITH AMS 2640-83


8 MARKING: MATERIAL IDENTIFICATION AND MARKING IN ACCORDANCE WITH AMS 2800-76 DEPRESSED .010 MAX

9 TOLERANCE UNLESS OTHERWISE SPECIFIED, TOLERANCES SHALL BE LINEAR DIMENSIONS ± .010, ANGULAR DIMENSIONS ±5°

10 EDGES BREAK SHARP EDGES .003 - .015, UNLESS OTHERWISE SPECIFIED

11 PART NUMBER THE PART NUMBER SHALL CONSIST OF THE BASIC MS NUMBER FOLLOWED BY A DASH NUMBER FROM TABLE I

EXAMPLE. MS9310-001



MS9310-001 INDICATES STUD, SHOULDERED, HEXAGON WRENCHING, DRILLED, STEEL, 250-28 UNF-3A X 250-28 UNF-3A, LENGTH 1 125

NOTES

1 ALL DIMENSIONS ARE IN INCHES

2. DO NOT USE UNASSIGNED PART NUMBERS

3 IN THE EVENT OF A CONFLICT BETWEEN THE TEXT OF THIS STANDARD AND THE REFERENCES CITED HEREIN, THE TEXT OF THIS STANDARD SHALL TAKE PRECEDENCE

4 REFERENCED GOVERNMENT (OR NONGOVERNMENT) DOCUMENTS OF THE ISSUE LISTED IN THAT ISSUE OF THE DEPARTMENT OF DEFENSE INDEX OF SPECIFICATIONS AND STANDARDS (DODISS) SPECIFIED IN THE SOLICITATION FORM A PART OF THIS STANDARD TO THE EXTENT SPECIFIED HEREIN

5 THIS STANDARD WAS DEVELOPED COOPERATIVELY WITH THE SAE AEROSPACE PROPULSION DIVISION

6. AS AND AMS ARE SAE PUBLICATIONS.

APPROVED 24 FEB 60 REVISED (B) FOR CHANGES SEE PAGES 1 AND 2

P A NAVY-AS Other Cust ARMY-AR AIR FORCE-99	INTERNATIONAL INTEREST	TITLE STUD, SHOULDERED, HEXAGON WRENCHING, DRILLED, STEEL, .250-28 UNF-3A X .250-28 UNF-3A	MILITARY STANDARD MS9310
PROCUREMENT SPECIFICATION AMS 7452-73	SUPERSEDES:		PAGE 2 OF 2

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T13:14Z
Check the source to verify that this is the current version before use.