MILITARY SPECIFICATION SHEET

CONNECTORS, RECEPTACLES, ELECTRICAL, COAXIAL, RADIO FREQUENCY, (SERIES N (CABLED), JAM NUT MOUNTED, SOCKET CONTACT, CLASS 2)

This amendment forms a part of MIL-C-39012/3F, dated 3 October 1986, and is approved for use by all Departments and Agencies of the Department of Defense.

PAGE 2

FIGURE 2, delete and substitute new figure 2 as follows:

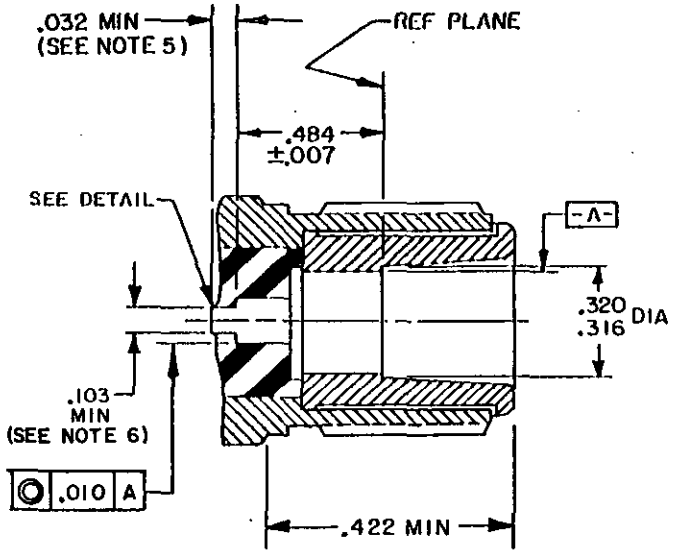


CATEGORY D

| Inches | mm |
|---|---|
| .007 | 0.18 |
| .010 | 0.25 |
| .032 | 0.81 |
| .103 | 2.62 |
| .316 | 8.03 |
| .320 | 8.13 |
| .422 | 10.72 |
| .484 | 12.29 |




DETAIL

NOTES:
1. Dimensions are in inches.
2. Slot design is optional.
3. Full threads to within .063 (1.60 mm) of shoulder; 1 1/2 maximum uneven threads to shoulder.
4. Metric equivalents are given for general information only.
5. Chamfer is optional, if chamfer is used put chamfer on a 30° maximum.
6. Dimension to meet connector performance requirements.

FIGURE 2. Category D captivation detail.


DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T16:38Z
Check the source to verify that this is the current version before use.

PAGE 13

Table IV, delete and substitute new note 3/ as printed below:

"3/ "The 'B' part number is required marking for connectors manufactured after 3 April 1987. The connectors that are in stock or distribution that were previously qualified and marked with the old part number shall also be considered acceptable for Government use until stock is purged. (Applies to category 'B' P/N change only; M39012/XXBXXXX)."

CONCLUDING MATERIAL

Custodians:
Army - CR
Navy - EC
Air Force - 85

Review activities:
Army - AR, MI
Air Force - 11, 17, 99
DLA - ES

User activities:
Army - AT
Navy - AS, MC, SH
Air Force - 19

Preparing activity:
Army - CR

Agent:
DLA - ES

(Project 5935-3683-03)



Source: https://assist.dla.mil -- Downloaded: 2026-10-21T16:38Z
Check the source to verify that this is the current version before use.