W-L-71a
NOVEMBER 3, 1959
SUPERSEDING
Int. Fed. Spec. W-L-0071(GSA-FSS)
May 19, 1958

FEDERAL SPECIFICATION

LAMP, INCANDESCENT, (SEALED-REFLECTOR, GENERAL SERVICE, PAR38 BULB, TRADE No. 150 PAR38/FL)

This specification was approved by the Commissioner, Federal Supply Service, General Services Administration, for the use of all Federal agencies.

1. SCOPE AND CLASSIFICATION. — This specification covers one type, one class and one size of sealed-reflector incandescent lamp for operation on 115, 120 or 125 volts as specified in the invitation for bids, as follows:

Rated and Design Volts	Watts	Filament Type	Rated Life	Life Test Cycle	Life Test Burning Position
115;120;125	150	CC-6	2,000 Hours	Continuous	45° From Base-Up

2. APPLICABLE SPECIFICATIONS

2.1 The following Federal Specification, of the issue in effect on date of invitation for bids, forms a part of this specification:

Federal Specification:

W-L-50—Lamp, Incandescent, (Sealed-Reflector, General Specification For).

(Activities outside the Federal Government may obtain copies of Federal Specifications, Standards, and Handbooks as outlined under General Information in the Index of Federal Specifications, Standards, and Handbooks and at the prices indicated in the Index. The Index, which includes cumulative monthly supplements as issued, is for sale on a subscription basis by the Superintendent of Documents, U. S. Government Printing Office, Washington 25, D. C.

(Single copies of this specification and other product specifications required by activities outside the Federal Government for bidding purposes are available without charge at the General Services Administration Regional Offices in Boston, New York, Atlanta, Chicago, Kansas City, Mo., Dallas, Denver, San Francisco, Los Angeles, Seattle, and Washington, D. C.

(Federal Government activities may obtain copies of Federal Specifications, Standards, and Handbooks and the Index of Federal Specifications, Standards, and Handbooks from established distribution points in their agencies.)

3. REQUIREMENTS. — Shall be in accordance with applicable requirements of Federal Specification W-L-50 and the following:

3.1 Lamp performance.

3.1.1 *Initial candlepower for ten rating-test lamps.*—The initial candlepower shall conform to figure 1. The beam axis shall be that direction which best fits the actual candlepower distribution. The beam axis shall be not more than 7.5° from the base axis of the lamp, i.e., the direction through the center of the base of the lamp and the center of the lamp cover.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:22Z
Check the source to verify that this is the current version before use.


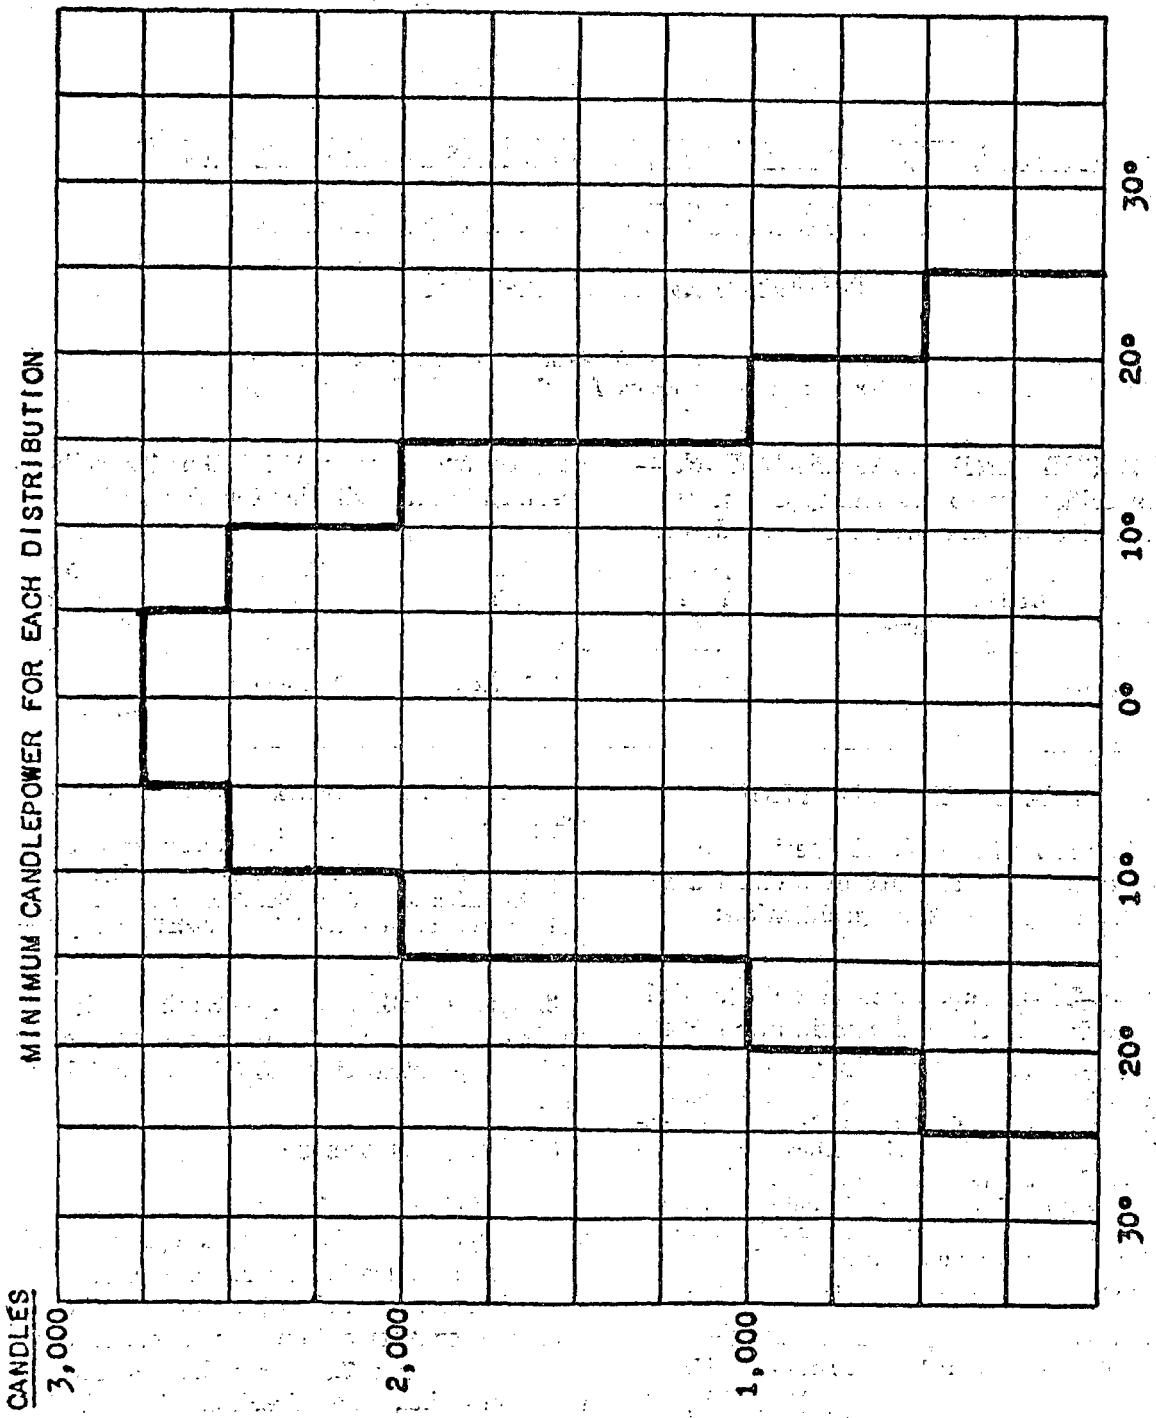


FIGURE 1.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:22Z
Check the source to verify that this is the current version before use.

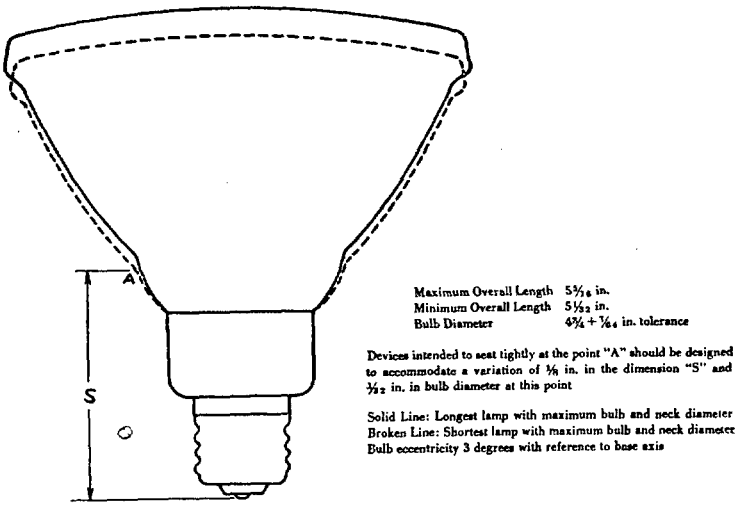

Medium Skirted Screw Base

FIGURE 2.

3.1.2 *Candlepower maintenance.*—The candlepower at 70 percent of rated life shall be not less than 75 percent of the value shown in Figure 1.

3.2 **Average Wattage.**—The average wattage shall not exceed the rated wattage by more than 5 percent.

3.3 **Dimensions.**—Dimensions shall be as indicated in figure 2.

4. **SAMPLING, INSPECTION, AND TEST PROCEDURES.**—Sampling, inspection and test procedures shall be in accordance with Federal Specification W–L–50 and the following:

Three candlepower distributions, spaced 60° apart shall be measured through the axis of the beam for each of the ten rating-test lamps.

5. **PREPARATION FOR DELIVERY** (Shall be in accordance with Federal Specification W–L–50.)

6. **NOTES**

6.1 **Ordering data.** — Purchasers should reference this specification and specify the voltage desired, see 1.

6.2 **Transportation description.** — Unless otherwise specified by the purchaser, the transportation description shall be as described in Federal Specification W–L–50.

Notice. — When Government drawings, specifications, or other data are used for any purpose other than in connection with a definitely related Government procurement operation, the United States Government thereby incurs no responsibility nor any obligation whatsoever; and the fact that the Government may have formulated, furnished, or in any way supplied the said drawings, specifications, or other data, is not to be regarded, by implication or otherwise as in any manner licensing the holder or any other person or corporation, or conveying any rights or permission to manufacture, use, or sell any patented invention that may in any way be related thereto.

MILITARY INTEREST:
Navy—A Sh S Y

Copies of this specification may be purchased for 5 cents each.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:22Z
Check the source to verify that this is the current version before use.